OptiMOS®-T Power-Transistor


Product Summary

V_{DS}	40	V
$R_{DS(on),max}$ (SMD version)	5.4	mΩ
I_D	80	A


Features

- N-channel - Enhancement mode
- Automotive AEC Q101 qualified
- MSL1 up to 260°C peak reflow
- 175°C operating temperature
- Green package (RoHS compliant)
- 100% Avalanche tested

PG-TO263-3-2 PG-TO262-3-1 PG-TO220-3-1

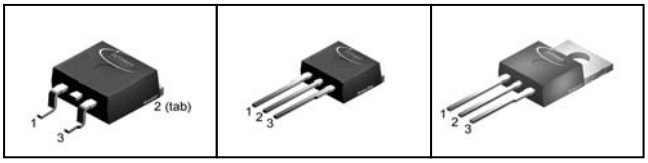

Type	Package	Marking
IPB80N04S3-06	PG-TO263-3-2	3N0406
IPI80N04S3-06	PG-TO262-3-1	3N0406
IPP80N04S3-06	PG-TO220-3-1	3N0406



Maximum ratings, at T_j=25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current	I_D	T_C=25°C, V_{GS}=10V[1)]	80	A
		T_C=100 °C, V_{GS}=10 V[2)]	71	
Pulsed drain current[2)]	$I_{D,pulse}$	T_C=25 °C	320	
Avalanche energy, single pulse	E_{AS}	I_D=80 A	125	mJ
Gate source voltage	V_{GS}		±20	V
Power dissipation	P_{tot}	T_C=25 °C	100	W
Operating and storage temperature	T_j, T_{stg}		-55 ... +175	°C
IEC climatic category; DIN IEC 68-1			55/175/56	

Downloaded from Arrow.com.

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Thermal characteristics[2]						
Thermal resistance, junction - case	R_{thJC}		-	-	1.5	K/W
Thermal resistance, junction - ambient, leaded	R_{thJA}		-	-	62	
SMD version, device on PCB	R_{thJA}	minimal footprint	-	-	62	
		6 cm^2 cooling area[3]	-	-	40	
Electrical characteristics, at T_j=25 °C, unless otherwise specified						
Static characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS}=0 V, I_D= 1 mA	40	-	-	V
Gate threshold voltage	$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=52 µA	2.1	3.0	4.0	
Zero gate voltage drain current	I_{DSS}	V_{DS}=40 V, V_{GS}=0 V, T_j=25 °C	-	-	1	µA
		V_{DS}=40 V, V_{GS}=0 V, T_j=125 °C[2]	-	-	100	
Gate-source leakage current	I_{GSS}	V_{GS}=20 V, V_{DS}=0 V	-	-	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	V_{GS}=10 V, I_D=80 A	-	4.6	5.7	mΩ
		V_{GS}=10 V, I_D=80 A, SMD version	-	4.3	5.4	

Downloaded from Arrow.com.

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Dynamic characteristics[2]						
Input capacitance	C_{iss}	V_{GS}=0 V, V_{DS}=25 V, f=1 MHz	-	2500	3250	pF
Output capacitance	C_{oss}		-	660	860	
Reverse transfer capacitance	C_{rss}		-	100	130	
Turn-on delay time	$t_{d(on)}$	V_{DD}=20 V, V_{GS}=10 V, I_D=80 A, R_G=6 Ω	-	15	-	ns
Rise time	t_r		-	10	-	
Turn-off delay time	$t_{d(off)}$		-	20	-	
Fall time	t_f		-	10	-	
Gate Charge Characteristics[2]						
Gate to source charge	Q_{gs}	V_{DD}=32 V, I_D=80 A, V_{GS}=0 to 10 V	-	15	20	nC
Gate to drain charge	Q_{gd}		-	9	16	
Gate charge total	Q_g		-	36	47	
Gate plateau voltage	$V_{plateau}$		-	6.0	-	V
Reverse Diode						
Diode continous forward current[2]	I_S	T_C=25 °C	-	-	80	A
Diode pulse current[2]	$I_{S,pulse}$		-	-	320	
Diode forward voltage	V_{SD}	V_{GS}=0 V, I_F=80 A, T_j=25 °C	-	1	1.3	V
Reverse recovery time[2]	t_{rr}	V_R=20 V, I_F=I_S, di_F/dt=100 A/µs	-	34	-	ns
Reverse recovery charge[2]	Q_{rr}		-	36	-	nC

[1] Current is limited by bondwire; with an R_{thJC} = 1.5K/W the chip is able to carry 100A at 25°C. For detailed information see Application Note ANPS071E at *www.infineon.com/optimos*


[2] Defined by design. Not subject to production test.

[3] Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm^2 (one layer, 70 µm thick) copper area for drain connection. PCB is vertical in still air.

Downloaded from Arrow.com.


1 Power dissipation

$P_{tot} = f(T_C)$; $V_{GS} \geq 6$ V

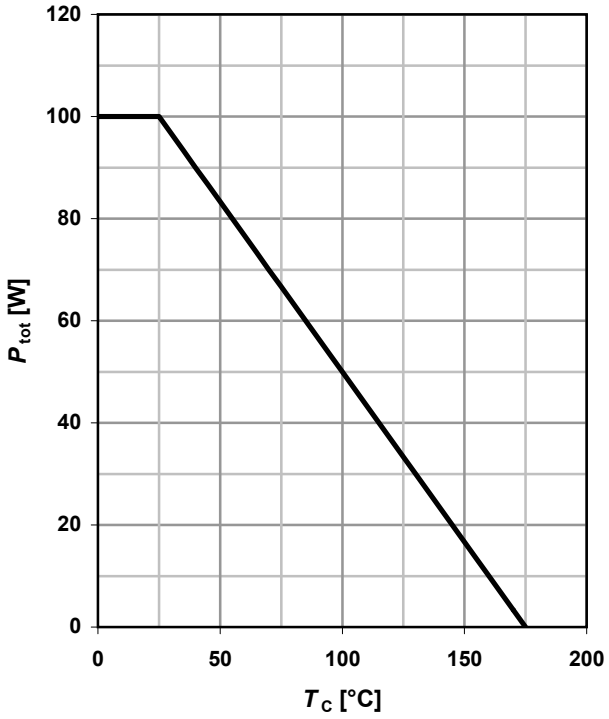

2 Drain current


$I_D = f(T_C)$; $V_{GS} \geq 6$ V

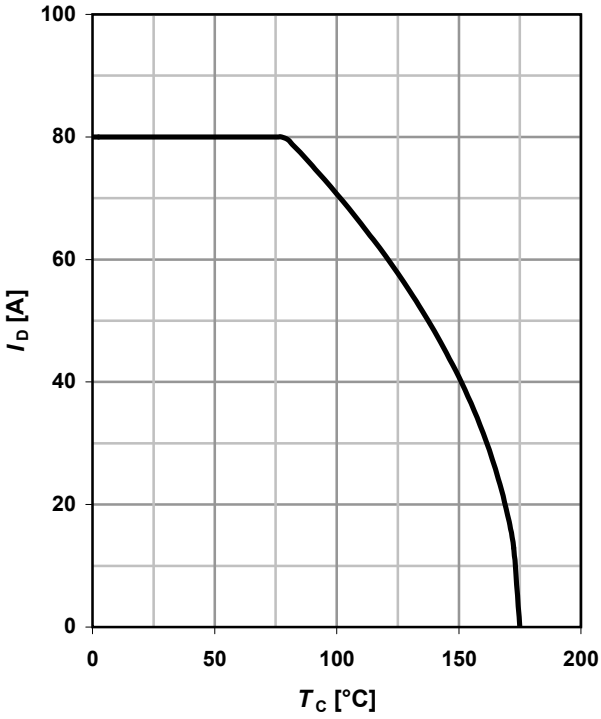

3 Safe operating area

$I_D = f(V_{DS})$; $T_C = 25$ °C; $D = 0$; SMD


parameter: t_p

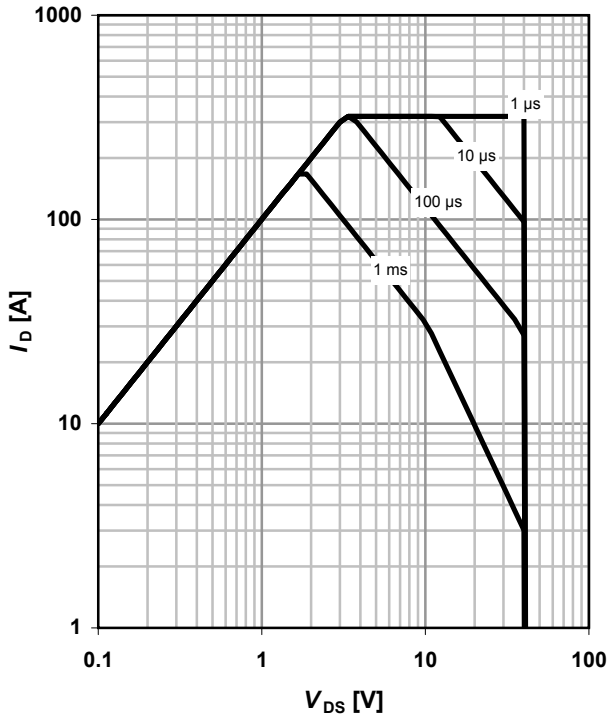

4 Max. transient thermal impedance

$Z_{thJC} = f(t_p)$

parameter: $D = t_p / T$

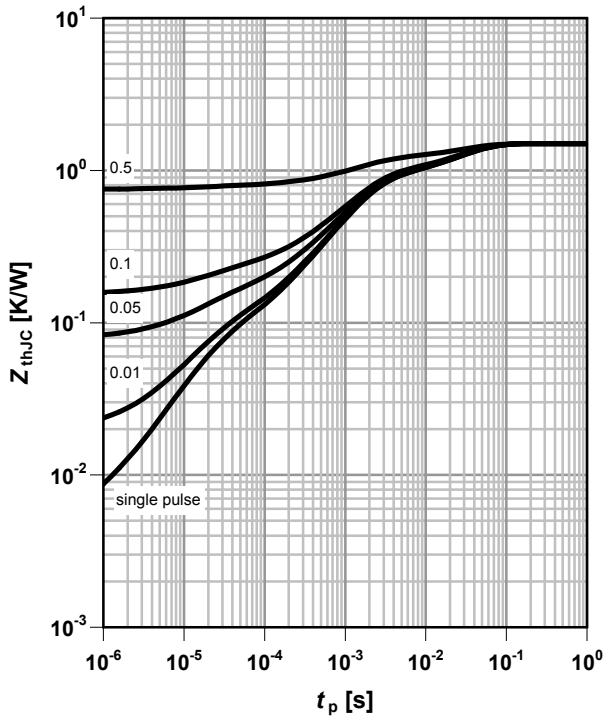


Downloaded from Arrow.com.

5 Typ. output characteristics

$I_D = f(V_{DS})$; $T_j = 25$ °C; SMD


parameter: V_{GS}

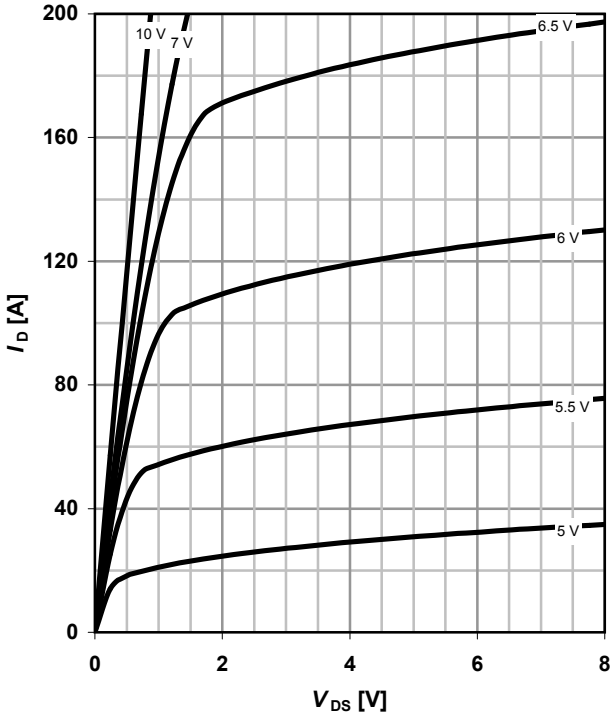

6 Typ. drain-source on-state resistance

$R_{DS(on)} = f(I_D)$; $T_j = 25$ °C; SMD


parameter: V_{GS}

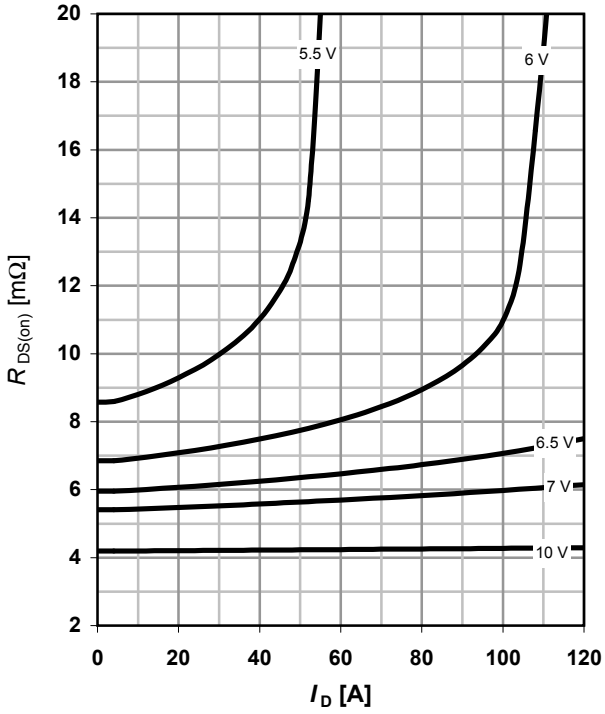

7 Typ. transfer characteristics


$I_D = f(V_{GS})$; $V_{DS} = 6$V

parameter: T_j

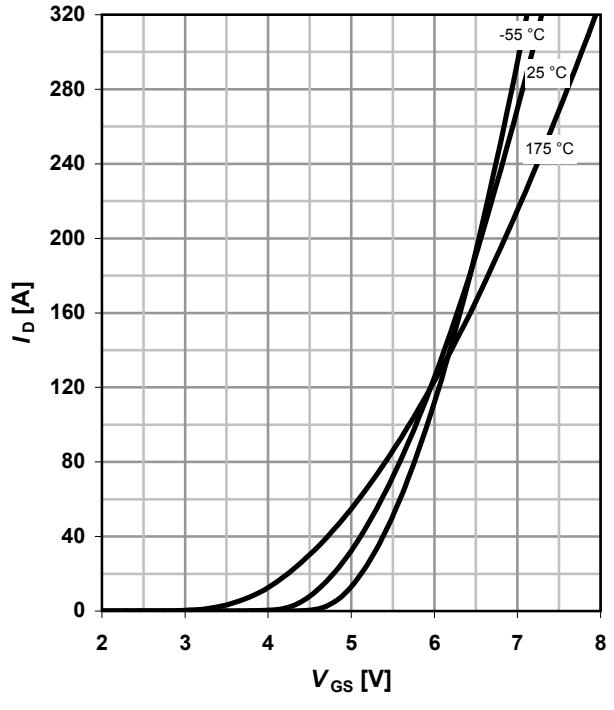

8 Typ. drain-source on-state resistance

$R_{DS(on)} = f(T_j)$; $I_D = 80$ A; $V_{GS} = 10$ V; SMD

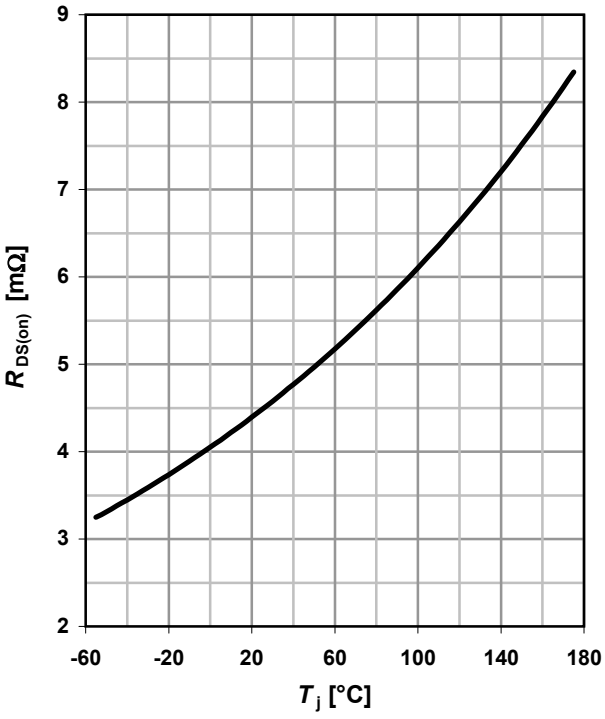


Downloaded from Arrow.com.

9 Typ. gate threshold voltage


$V_{GS(th)} = f(T_j)$; $V_{GS} = V_{DS}$

parameter: I_D

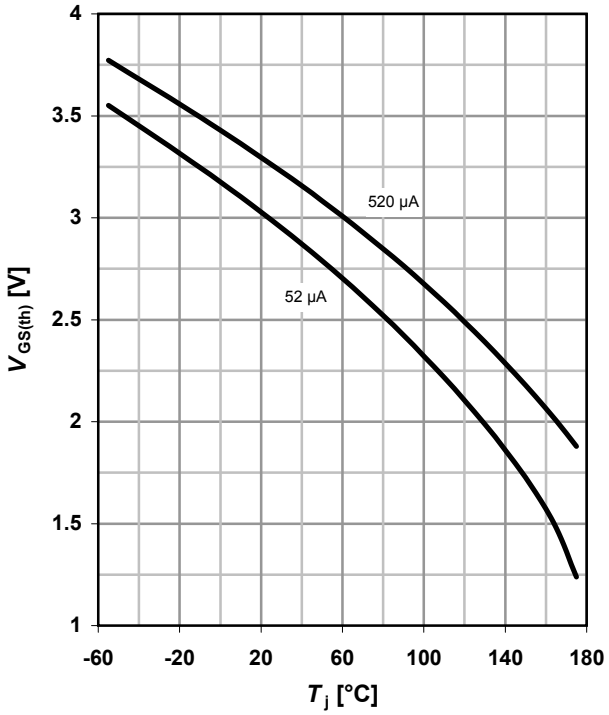

10 Typ. capacitances


$C = f(V_{DS})$; $V_{GS} = 0$ V; $f = 1$ MHz

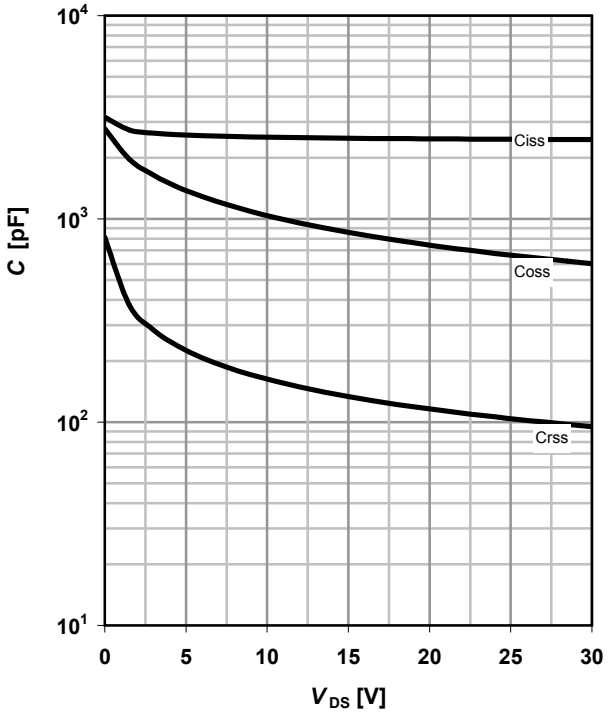

11 Typical forward diode characteristicis

IF = f(V_{SD})


parameter: T_j

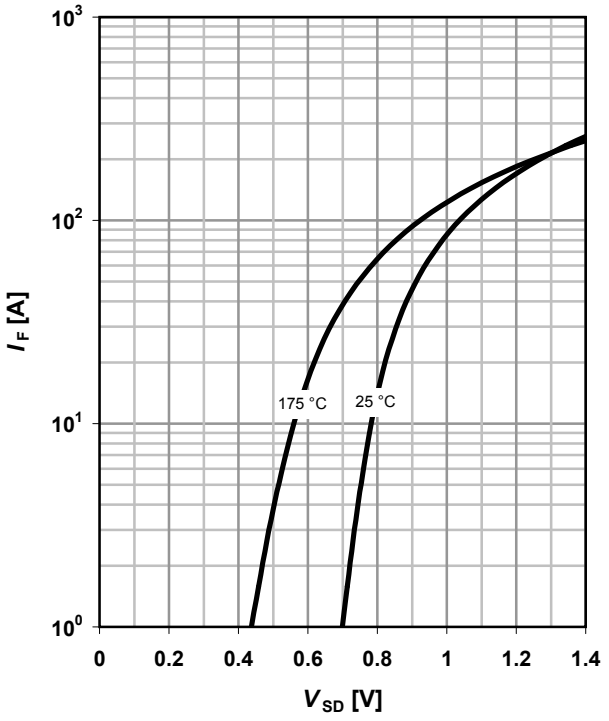

12 Typ. avalanche characteristics

$I_{AS} = f(t_{AV})$

parameter: $T_{j(start)}$

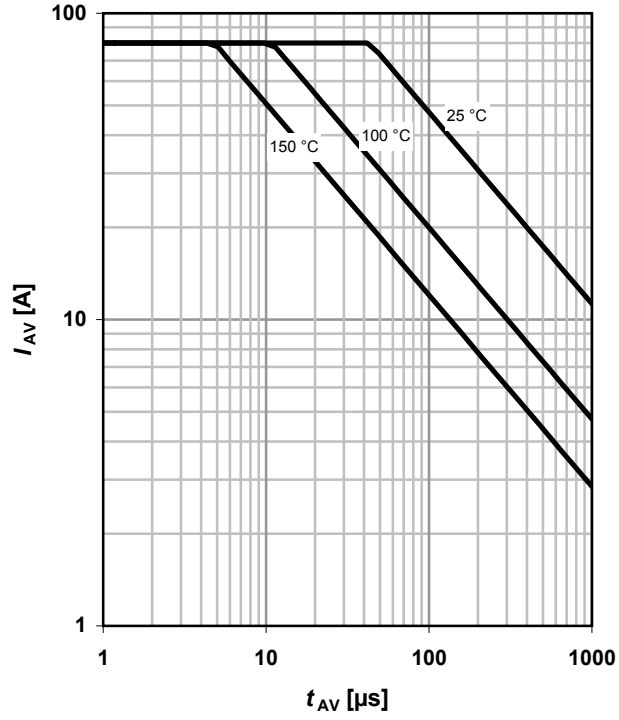


Downloaded from Arrow.com.

13 Typical avalanche energy


$E_{AS} = f(T_j)$

parameter: I_D

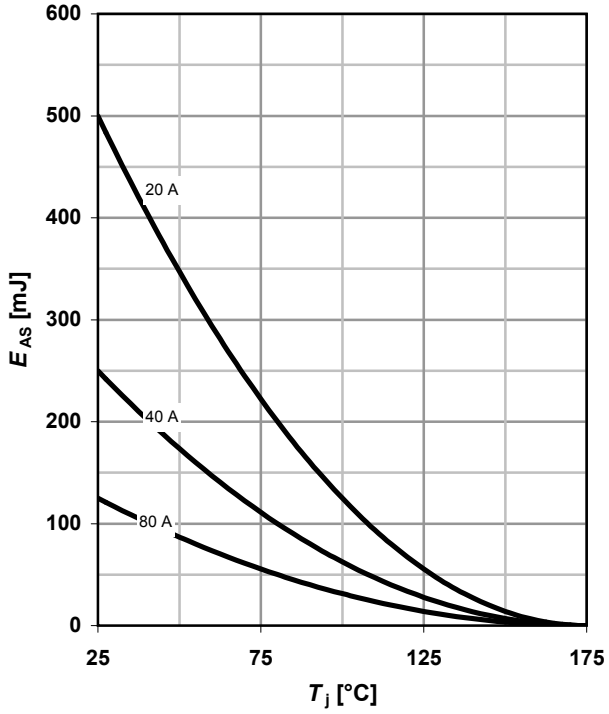

14 Typ. drain-source breakdown voltage


$V_{BR(DSS)} = f(T_j)$; $I_D = 1$ mA

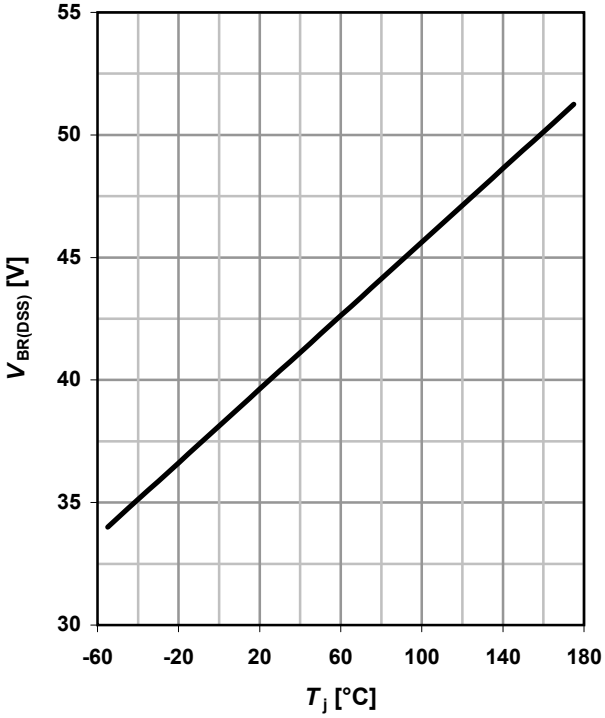


15 Typ. gate charge

$V_{GS} = f(Q_{gate})$; $I_D = 80$ A pulsed

parameter: V_{DD}

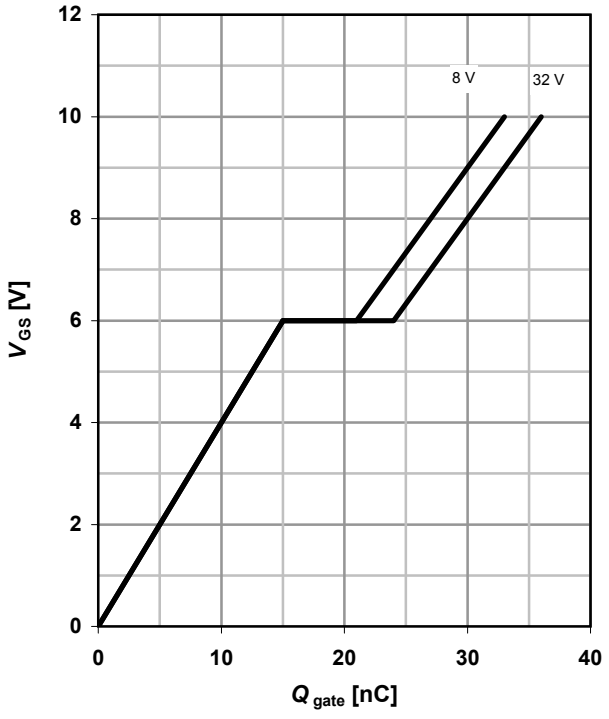

16 Gate charge waveforms

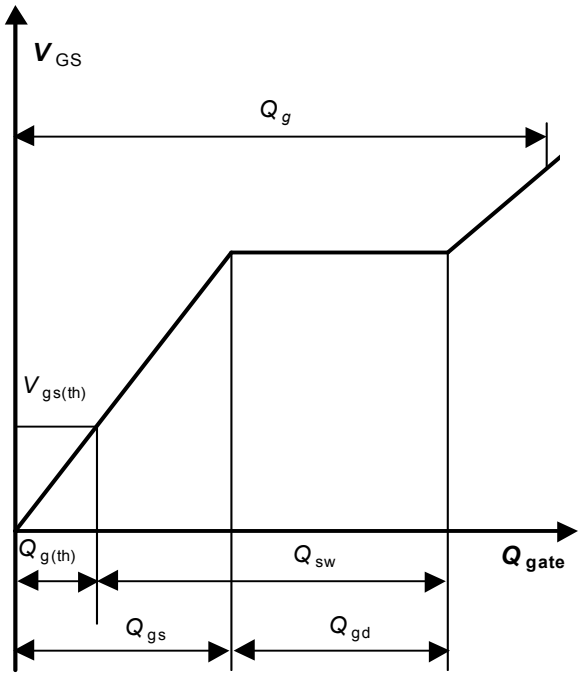

Downloaded from Arrow.com.

Published by
Infineon Technologies AG
81726 Munich, Germany

© Infineon Technologies AG 2007
All Rights Reserved.

Legal Disclaimer
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non‑infringement of intellectual property rights of any third party.

Information
For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**www.infineon.com**).

Warnings
Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.
Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Downloaded from Arrow.com.

Revision History

Version	Date	Changes
1.1	30.04.2007	RthJC from 1.7K/W to 1.5K/W
1.1	30.04.2007	RDSon max IPB from 5.8mOhm to 5.4mOhm
1.1	30.04.2007	RDSon max IPP/I from 6.1mOhm to 5.7mOhm
1.1	30.04.2007	Update of diagrams involving RthJC and RDSon_max
1.1	30.04.2007	QGD max from 13nC to 16nC

Downloaded from Arrow.com.