

MOSFET - Power, Single N-Channel, TOLL 80 V, 0.79 mΩ, 457 A NVBLS0D8N08X

Features

- Low Q_{RR} , Soft Recovery Body Diode
- Low $R_{DS(on)}$ to Minimize Conduction Losses
- Low Q_G and Capacitance to Minimize Driver Losses
- AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

Typical Applications

- Synchronous Rectification (SR) in DC-DC and AC-DC
- Primary Switch in Isolated DC-DC Converter
- Motor Drives
- 48 V Battery Switch
- Battery Management System

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise noted)


Parameter		Symbol	Value	Unit
Drain-to-Source Voltage		V_{DSS}	80	V
Gate-to-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C = 25^{\circ}\text{C}$	I_D	457	A
	$T_C = 100^{\circ}\text{C}$		323	
Power Dissipation	$T_C = 25^{\circ}\text{C}$	P_D	325	W
Pulsed Drain Current	$T_C = 25^{\circ}\text{C}$, $t_p = 100\text{ }\mu\text{s}$	I_{DM}	1629	A
Pulsed Source Current (Body Diode)		I_{SM}	1629	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to +175	$^{\circ}\text{C}$
Source Current (Body Diode)		I_S	547	A
Single Pulse Avalanche Energy ($I_{PK} = 103\text{ A}$)		E_{AS}	530	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)		T_L	260	$^{\circ}\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
2. Actual continuous current will be limited by thermal & electromechanical application board design.
3. E_{AS} of 530 mJ is based on started $T_J = 25^\circ\text{C}$, $I_{AS} = 103 \text{ A}$, $V_{DD} = 64 \text{ V}$, $V_{GS} = 10 \text{ V}$, 100% avalanche tested.


$V_{(BR)DSS}$	$R_{DS(ON)} \text{ MAX}$	$I_D \text{ MAX}$
80 V	0.79 mΩ @ 10 V	457 A

N-CHANNEL MOSFET



H-PSOF8L
CASE 100CU

MARKING DIAGRAM



- A = Assembly Location
Y = Year
WW = Work Week
ZZ = Assembly Lot Code
0D8N08 = Specific Device Code

ORDERING INFORMATION

Device	Package	Shipping†
NVBLS0D8N08XTXG	H-PSOF8L (Pb-Free)	2000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

Table 1. THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.46	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	43	

Table 2. ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = 1\text{ mA}, T_J = 25^\circ\text{C}$	80			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	$\Delta V_{(BR)DSS} / \Delta T_J$	$I_D = 1\text{ mA}$, Referenced to 25°C		35.5		mV/ $^\circ\text{C}$
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 80\text{ V}, T_J = 25^\circ\text{C}$			2	μA
		$V_{DS} = 80\text{ V}, T_J = 125^\circ\text{C}$			250	
Gate-to-Source Leakage Current	I_{GSS}	$V_{GS} = 20\text{ V}, V_{DS} = 0\text{ V}$			100	nA
ON CHARACTERISTICS						
Drain-to-Source On Resistance	$R_{DS(on)}$	$V_{GS} = 10\text{ V}, I_D = 80\text{ A}, T_J = 25^\circ\text{C}$		0.69	0.79	m Ω
Gate Threshold Voltage		$V_{GS} = V_{DS}, I_D = 720\text{ }\mu\text{A}, T_J = 25^\circ\text{C}$	2.4		3.6	V
Gate Threshold Voltage Temperature Coefficient	$\Delta V_{GS(th)} / \Delta T_J$	$V_{GS} = V_{DS}, I_D = 720\text{ }\mu\text{A}$		-7.95		mV/ $^\circ\text{C}$
Forward Transconductance	g_{FS}	$V_{DS} = 10\text{ V}, I_D = 80\text{ A}$		485		S
CHARGES, CAPACITANCES & GATE RESISTANCE						
Input Capacitance	C_{iss}	$V_{DS} = 40\text{ V}, V_{GS} = 0\text{ V}, f = 1\text{ MHz}$		12920		pF
Output Capacitance	C_{oss}			3670		
Reverse Transfer Capacitance	C_{rss}			55		
Output Charge	Q_{oss}			262		nC
Total Gate Charge	$Q_{G(tot)}$	$V_{DD} = 40\text{ V}, I_D = 80\text{ A}, V_{GS} = 6\text{ V}$		109		
		$V_{DD} = 40\text{ V}, I_D = 80\text{ A}, V_{GS} = 10\text{ V}$		174		
Threshold Gate Charge	$Q_{G(th)}$			34		
Gate-to-Source Charge	Q_{gs}			54		
Gate-to-Drain Charge	Q_{gd}			32		
Gate Plateau Voltage	V_{gp}			4.6		V
Gate Resistance	R_g	$f = 1\text{ MHz}$		0.5		Ω
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	$t_{d(on)}$	Resistive Load, $V_{GS} = 0/10\text{ V}$, $V_{DD} = 64\text{ V}, I_D = 80\text{ A}, R_G = 2.5\text{ }\Omega$		35		ns
Rise Time	t_r			15		
Turn-Off Delay Time	$t_{d(off)}$			74		
Fall Time	t_f			20		
SOURCE-TO-DRAIN DIODE CHARACTERISTICS						
Forward Diode Voltage	V_{SD}	$I_S = 80\text{ A}, V_{GS} = 0\text{ V}, T_J = 25^\circ\text{C}$		0.8		V
		$I_S = 80\text{ A}, V_{GS} = 0\text{ V}, T_J = 125^\circ\text{C}$		0.66		
Reverse Recovery Time	t_{rr}	$V_{GS} = 0\text{ V}, I_S = 80\text{ A}$ $di/dt = 1000\text{ A}/\mu\text{s}, V_{DD} = 64\text{ V}$		57		ns
Charge Time	t_a			26		
Discharge Time	t_b			31		
Reverse Recovery Charge	Q_{rr}			650		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

TYPICAL CHARACTERISTICS

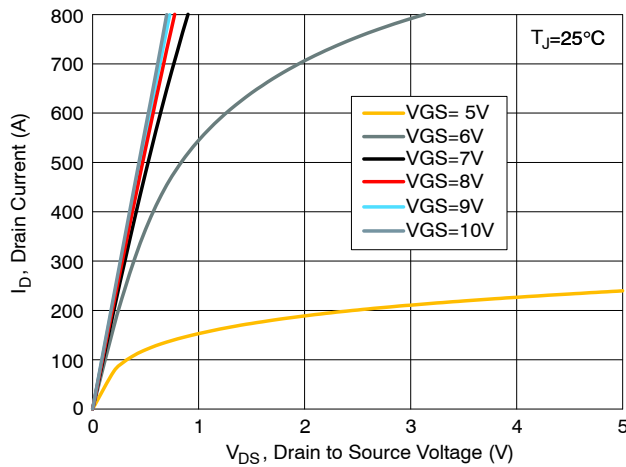


Figure 1. On-Region Characteristics

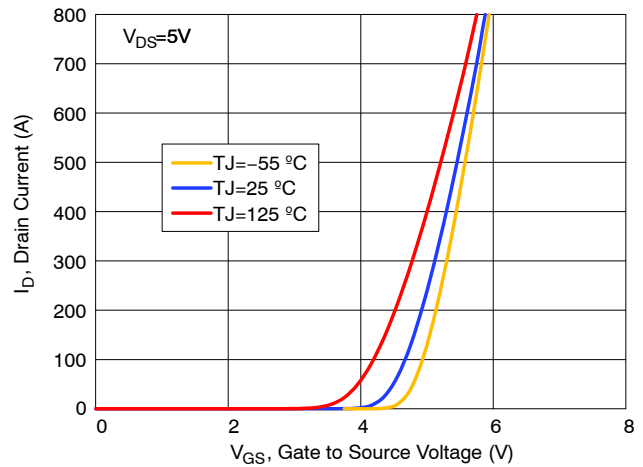


Figure 2. Transfer Characteristics

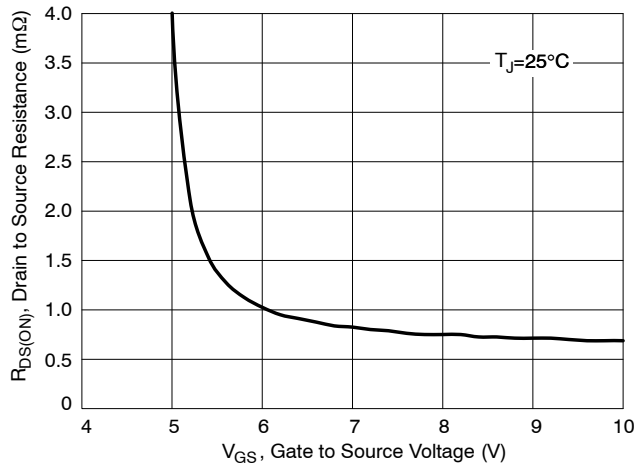


Figure 3. On-Resistance vs. Gate Voltage

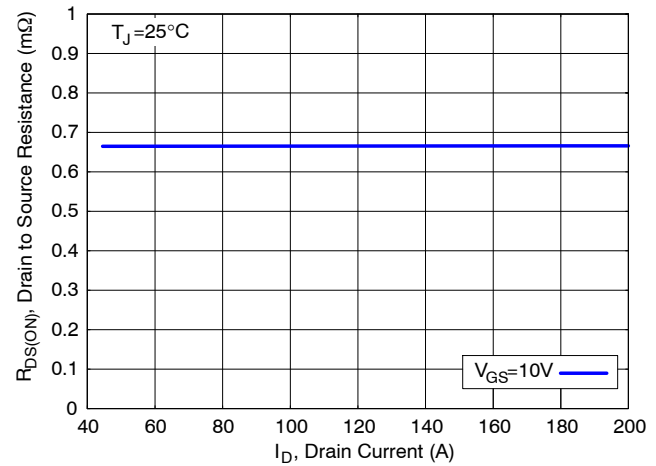


Figure 4. On-Resistance vs. Drain Current

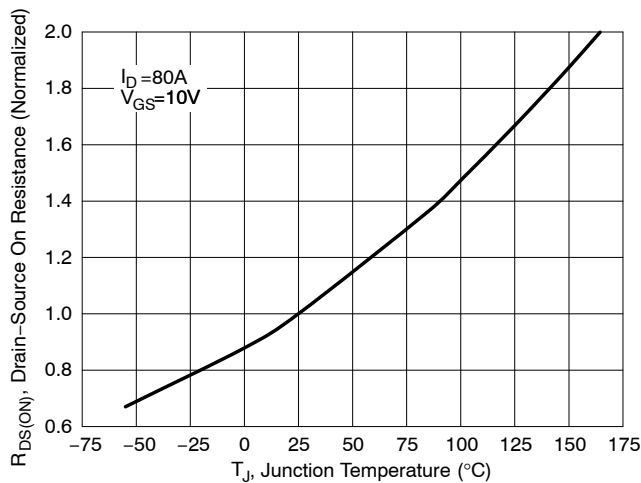


Figure 5. Normalized On-Resistance vs. Junction Temperature

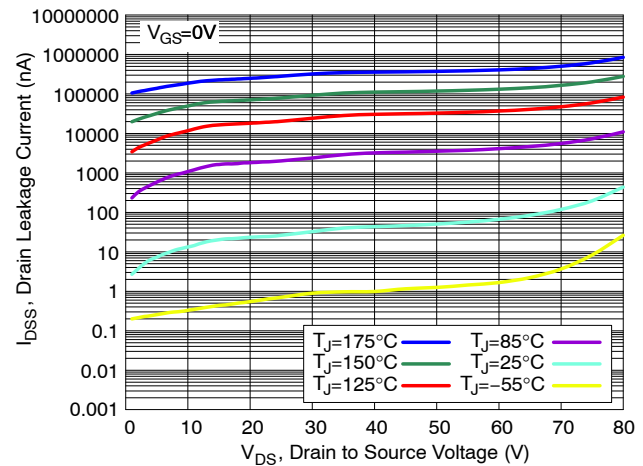


Figure 6. Drain Leakage Current vs. Drain Voltage

TYPICAL CHARACTERISTICS

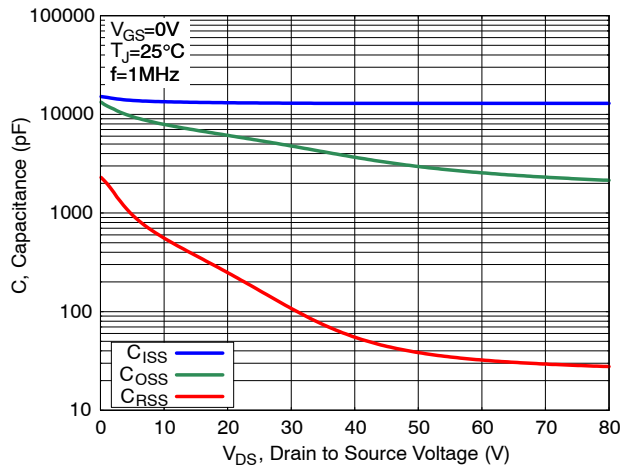


Figure 7. Capacitance Characteristics

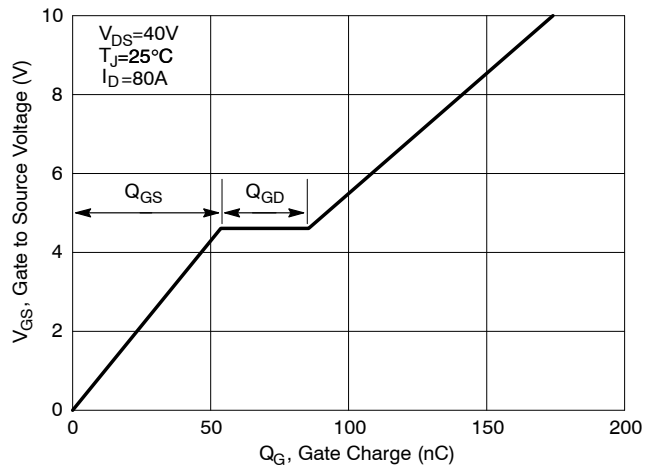


Figure 8. Gate Charge Characteristics

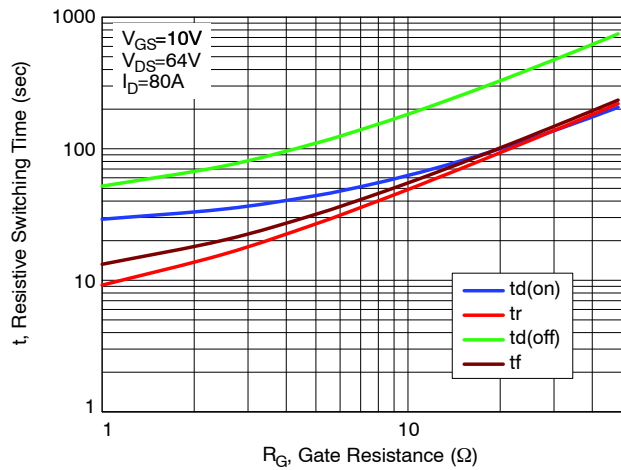


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

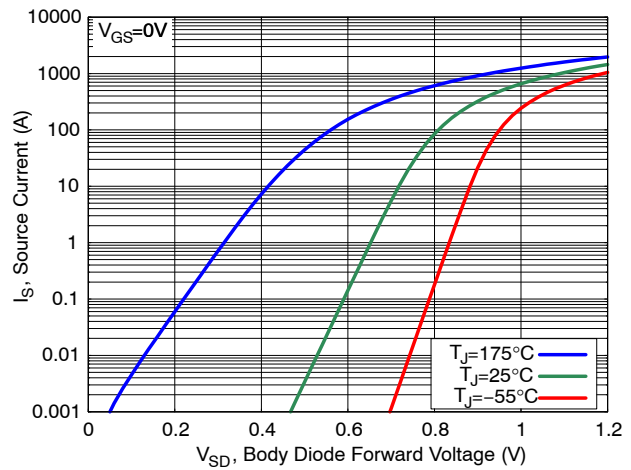


Figure 10. Diode Forward Characteristics

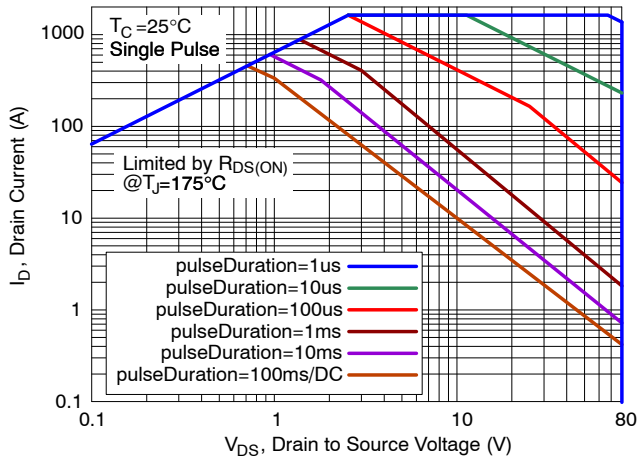


Figure 11. Safe Operating Area (SOA)

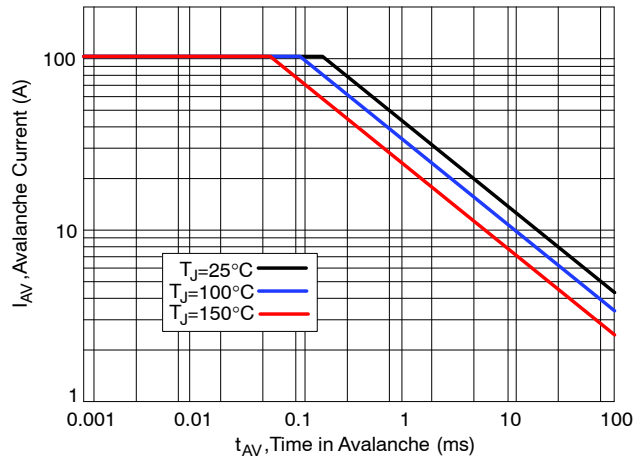


Figure 12. Avalanche Current vs. Pulse Time (UIS)

TYPICAL CHARACTERISTICS

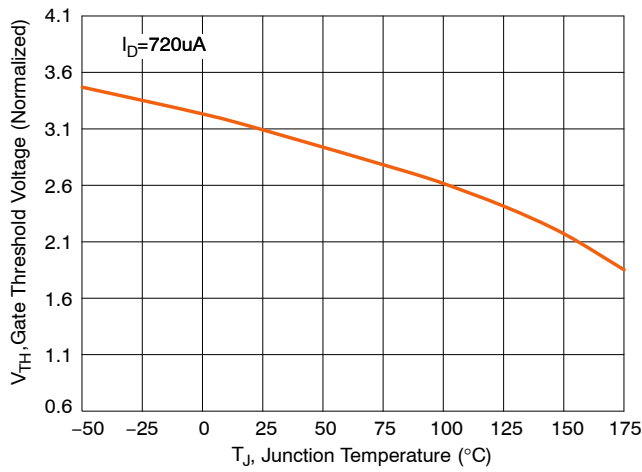


Figure 13. Gate Threshold Voltage vs. Junction Temperature

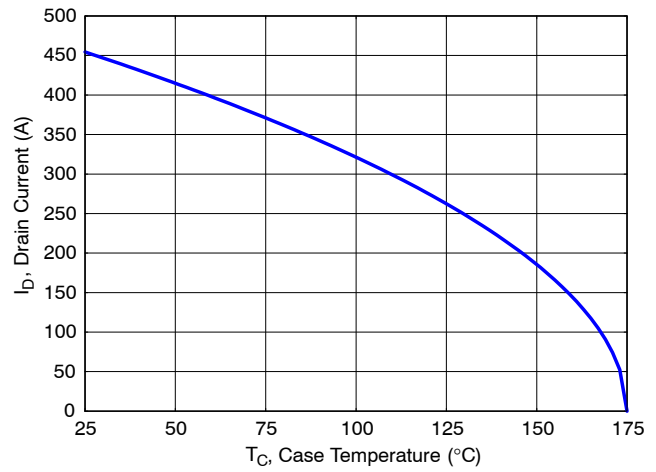


Figure 14. Maximum Current vs. Case Temperature







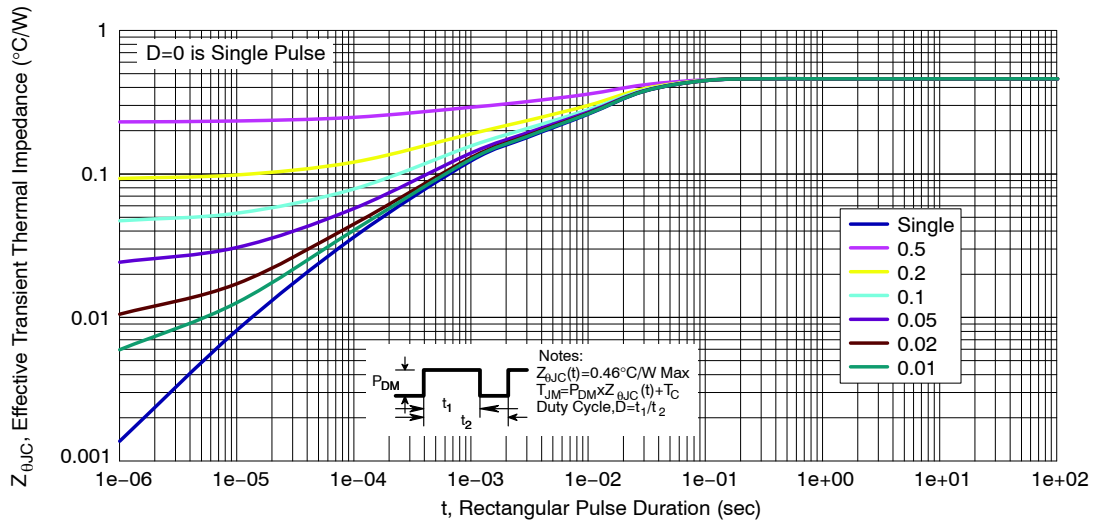


Figure 15. Transient Thermal Response

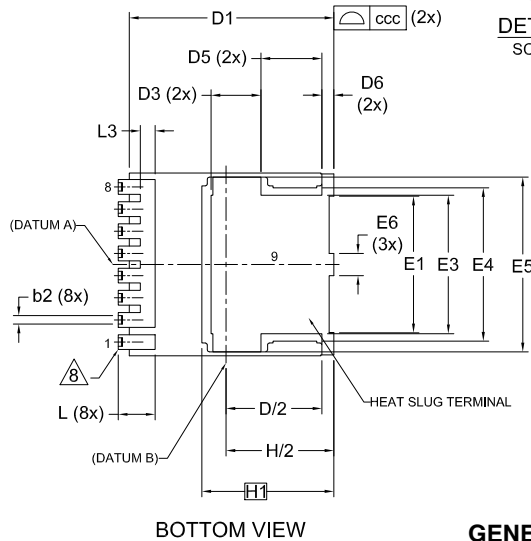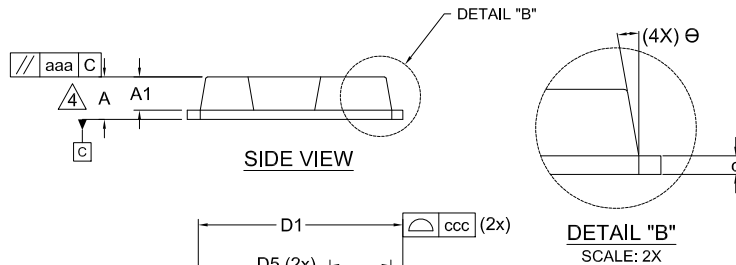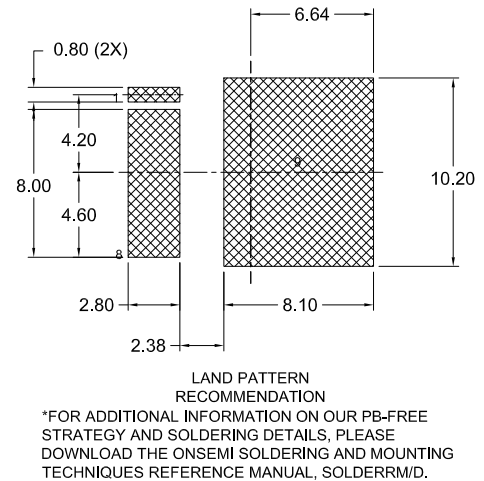


H-PSOF8L 11.68x9.80x2.30, 1.20P
CASE 100CU
ISSUE F

DATE 30 JUL 2024

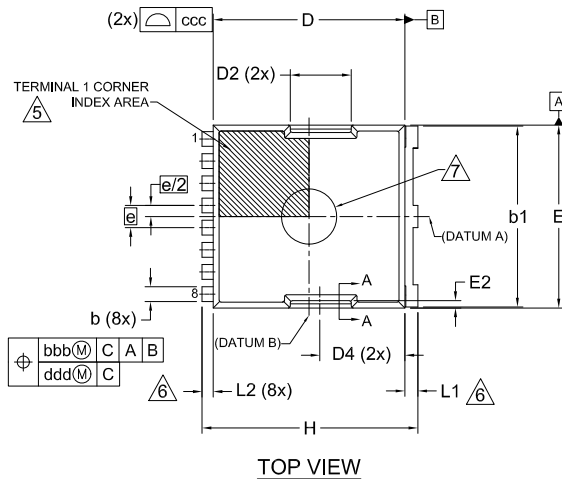

GENERIC
MARKING DIAGRAM*

A = Assembly Location
Y = Year
WW = Work Week
ZZ = Assembly Lot Code
XXXX = Specific Device Code



NOTES:

1. PACKAGE STANDARD REFERENCE: JEDEC MO-299, ISSUE B.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
3. "e" REPRESENTS THE TERMINAL PITCH.
4. THIS DIMENSION INCLUDES ENCAPSULATION THICKNESS "A1", AND PACKAGE BODY THICKNESS, BUT DOES NOT INCLUDE ATTACHED FEATURES, e.g., EXTERNAL OR CHIP CAPACITORS. AN INTEGRAL HEATSLUG IS NOT CONSIDERED AS ATTACHED FEATURE.
5. A VISUAL INDEX FEATURE MUST BE LOCATED WITHIN THE HATCHED AREA.
6. DIMENSIONS b1, L1, L2 APPLY TO PLATED TERMINALS.
7. THE LOCATION AND SIZE OF EJECTOR MARKS ARE OPTIONAL.
8. THE LOCATION AND NUMBER OF FUSED LEADS ARE OPTIONAL.

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	2.20	2.30	2.40
A1	1.70	1.80	1.90
b	0.70	0.80	0.90
b1	9.70	9.80	9.90
b2	0.35	0.45	0.55
c	0.40	0.50	0.60
D	10.28	10.38	10.48
D/2	5.09	5.19	5.29
D1	10.98	11.08	11.18
D2	3.20	3.30	3.40
D3	2.60	2.70	2.80
D4	4.45	4.55	4.65
D5	3.20	3.30	3.40
D6	0.55	0.65	0.75
E	9.80	9.90	10.00
E1	7.30	7.40	7.50
E2	0.30	0.40	0.50
E3	7.40	7.50	7.60
E4	8.20	8.30	8.40

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
E5	9.36	9.46	9.56
E6	1.10	1.20	1.30
E7	0.15	0.18	0.21
e	1.20 BSC		
e/2	0.60 BSC		
H	11.58	11.68	11.78
H/2	5.74	5.84	5.94
H1	7.15 BSC		
L	1.90	2.00	2.10
L1	0.60	0.70	0.80
L2	0.50	0.60	0.70
L3	0.70	0.80	0.90
Θ	10° REF		
Θ1	10° REF		
aaa	0.20		
bbb	0.25		
ccc	0.20		
ddd	0.20		
eee	0.10		

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON13813G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	H-PSOF8L 11.68x9.80x2.30, 1.20P	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

