

AJT

Time Delay/Class J

UL/CSA LISTED POWER FUSES

MAXIMUM CIRCUIT PROTECTION



Amp-Trap 2000® AJT fuses provide non-indication as well as a SmartSpot® visual open fuse indicator. With advanced material technology the AJT fuse provides IEC Type 2 No Damage protection to main, feeder, and branch circuits, for all types of loads — yet, they require only half the mounting space needed for 600VAC Class RK fuses. AJT's time-delay characteristics are ideal for handling typical motor and transformer inrush currents, while also providing superior current limiting ability.

FEATURES/BENEFITS

- Non-indicating or solid state SmartSpot® visual open fuse indicator
- Time delay for motor starting and transformer inrush
- 300kA interrupting rating - self-certified, UL witnessed tests
- Extremely current limiting for low peak let-thru current
- Non-indicating fuses suitable for use in NEC Class I Division 2 hazardous locations¹
- Recommended for Arc Flash energy reduction
- Small footprint requires less mounting space and allows smaller, more economical fuse blocks
- Easy 2-to-1 selectivity for prevention of nuisance shutdowns
- Unique Class J dimensions prevent replacement errors
- High-visibility orange label gives instant brand recognition
- Metal-embossed date and catalog number for traceability and lasting identification
- Fiberglass body provides dimensional stability in harsh environments
- High-grade silica filler ensures fast arc quenching
- Optional EI open fuse indicator/switch mount for AJT70 to 600

¹ Mersen highly recommends installation in Class I Division 2 certified sealed enclosure.

RATINGS

- **Volts:**
 - 1-600A models: 600VAC, 400VDC
 - 15-600A models: 700VAC (self-certified)
- **Amps:** 1 to 600A
- **I.R.:** 200kA I.R. AC, 100kA I.R. DC (self-certified for 600VAC, 300kA I.R., and 700VAC, 200kA I.R.)

APPLICATIONS

- Motor circuits
- Mains
- Feeders
- Branch circuits
- Lighting, heating, and general loads
- Transformers
- Control panels
- Circuit breaker back-up
- Bus duct
- Load centers

APPROVALS/STANDARDS

AJT (1-600)

- UL listed to standard 248-8 File E2137
- DC listed to UL standard 248
- CSA certified to standard C22.2 No. 248.8
- IEC 60269-2-1

AJT (70-600) EI

- UL listed
- DC tested to UL standard 248



CATALOG NUMBERS (AMPS)

1-7A: Non-indicating only (SmartSpot® visual indicator not available).							
AJT1	AJT1-6/10	AJT2-1/4	AJT3	AJT3-1/2	AJT4-1/2	AJT5-6/10	AJT6-1/4
AJT1-1/4	AJT1-8/10	AJT2-1/2	AJT3-2/10	AJT4	AJT5	AJT6	AJT7
AJT1-1/2	AJT2	AJT2-8/10					
8-600A: Non-indicating and SmartSpot visual indicator versions available.							
For SmartSpot, add suffix 'ID' to catalog number. Ex.: AJT30 (non-indicating); AJT30ID (SmartSpot indicator).							
AJT8	AJT15	AJT30	AJT50	AJT90	AJT150	AJT250	AJT450
AJT9	AJT17-1/2	AJT35	AJT60	AJT100	AJT175	AJT300	AJT500
AJT10	AJT20	AJT40	AJT70	AJT110	AJT200	AJT350	AJT600
AJT12	AJT25	AJT45	AJT80	AJT125	AJT225	AJT400	



RECOMMENDED FUSE BLOCKS WITH BOX CONNECTORS FOR AMP-TRAP® CLASS J FUSES

Fuse Ampere Rating	Catalog Number 600V or Less	
	1 Pole	3 Pole
0-30	US3J1I	US3J3I
31-60	US6J1I	US6J3I
61-100	FB60J100B1	FB60J100B3
101-200	62001J	62003J
201-400	64031J	64033J
401-600	6631J	6633J


A variety of pole configurations and termination provisions are available. Refer to Section FB for details.

DIMENSIONS

Ampere Rating	A		B		C		D		E		F		G		H	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
1-30	2-1/4	57	13/16	21	-	-	-	-	-	-	-	-	-	-	-	-
31-60	2-3/8	60	1-1/16	27	-	-	-	-	-	-	-	-	-	-	-	-
61-100	4-5/8	117	1-1/16	27	1/8	3.2	3/4	19	1	25	3-5/8	92	3/8	10	9/32	7
101-200	5-3/4	146	1-5/8	41	3/16	4.8	1-1/8	29	1-3/8	35	4-3/8	111	3/8	10	9/32	7
201-400	7-1/8	181	2-1/8	54	1/4	6.3	1-5/8	41	1-7/8	48	5-1/4	133	17/32	14	13/32	10
401-600	8	203	2-1/2	64	3/8	9.5	2	51	2-1/8	54	6	152	11/16	18	17/32	13

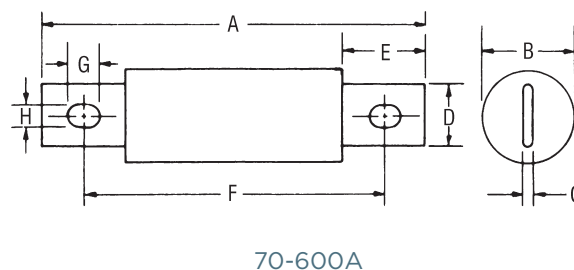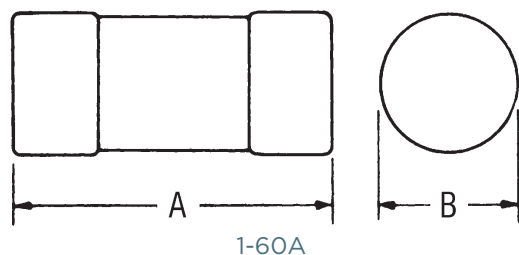

OPTIONAL INDICATOR/MICROSWITCH MOUNT (EI) DIMENSIONS

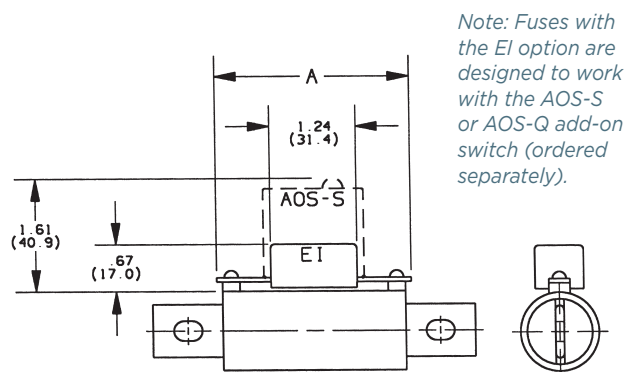

Catalog Number	A
AJT (70-100)-EI	2.8 in [71.0 mm]
AJT (110-200)-EI	3.22 in [81.8 mm]
AJT (225-400)-EI	3.24 in [82.2 mm]
AJT (450-600)-EI	3.61 in [91.8 mm]