

# Digital Transistors (BRT) R1 = 10 k $\Omega$ , R2 = 47 k $\Omega$

# MUN2214, MMUN2214L, MUN5214, DTC114YE, DTC114YM3, NSBC114YF3

# NPN Transistors with Monolithic Bias Resistor Network

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base–emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

### **Features**


- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant


### MAXIMUM RATINGS (T<sub>A</sub> = 25 °C)

Rating	Symbol	Max	Unit
Collector-Base Voltage	V <sub>CBO</sub>	50	Vdc
Collector-Emitter Voltage	$V_{CEO}$	50	Vdc
Collector Current – Continuous	Ic	100	mAdc
Input Forward Voltage	V <sub>IN(fwd)</sub>	40	Vdc
Input Reverse Voltage	V <sub>IN(rev)</sub>	6	Vdc

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

### **PIN CONNECTION**



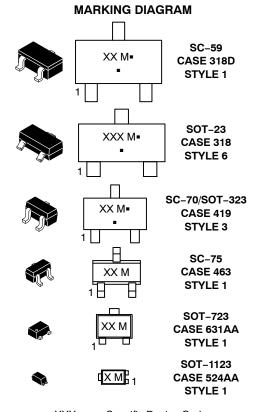

XXX = Specific Device Code

M = Date Code\*

= Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

## ORDERING INFORMATION

See detailed ordering, marking, and shipping information in the package dimensions section on page 2 of this data sheet.

**Table 1. ORDERING INFORMATION** 

Device	Part Marking	Package	Shipping <sup>†</sup>
MUN2214T1G, SMUN2214T1G*	8D	SC-59 (Pb-Free)	3000 / Tape & Reel
MUN2214T3G, SMUN2214T3G*	8D	SC-59 (Pb-Free)	10000 / Tape & Reel
MMUN2214LT1G, SMMUN2214LT1G*	A8D	SOT-23 (Pb-Free)	3000 / Tape & Reel
MUN5214T1G, SMUN5214T1G*	8D	SC-70/SOT-323 (Pb-Free)	3000 / Tape & Reel
DTC114YET1G, SDTC114YET1G	8D	SC-75 (Pb-Free)	3000 / Tape & Reel
DTC114YM3T5G, NSVDTC114YM3T5G*	8D	SOT-723 (Pb-Free)	8000 / Tape & Reel
NSBC114YF3T5G	J	SOT-1123 (Pb-Free)	8000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>\*</sup>S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.




Figure 1. Derating Curve

- (1) SC-75 and SC-70/SOT-323; Minimum Pad
- (2) SC-59; Minimum Pad
- (3) SOT-23; Minimum Pad
- (4) SOT-1123; 100 mm<sup>2</sup>, 1 oz. copper trace
- (5) SOT-723; Minimum Pad

**Table 2. THERMAL CHARACTERISTICS** 

		Symbol	Max	Unit
THERMAL CHARACTERISTICS (SC-59) (MUN2214)				
Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C	(Note 1) (Note 2) (Note 1) (Note 2)	P <sub>D</sub>	230 338 1.8 2.7	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{\theta JA}$	540 370	°C/W
Thermal Resistance, Junction to Lead	(Note 1) (Note 2)	$R_{ hetaJL}$	264 287	°C/W
Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTICS (SOT-23) (MMUN2214L)				
Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C	(Note 1) (Note 2) (Note 1) (Note 2)	P <sub>D</sub>	246 400 2.0 3.2	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ heta JA}$	508 311	°C/W
Thermal Resistance, Junction to Lead	(Note 1) (Note 2)	$R_{ hetaJL}$	174 208	°C/W
Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTICS (SC-70/SOT-323) (MUN5214)				
Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C	(Note 1) (Note 2) (Note 1) (Note 2)	$P_{D}$	202 310 1.6 2.5	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ heta JA}$	618 403	°C/W
Thermal Resistance, Junction to Lead	(Note 1) (Note 2)	$R_{ hetaJL}$	280 332	°C/W
Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTICS (SC-75) (DTC114YE)				
Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C	(Note 1) (Note 2) (Note 1) (Note 2)	P <sub>D</sub>	200 300 1.6 2.4	mW mW/°C
	(Note 2)			
Thermal Resistance, Junction to Ambient	(Note 2) (Note 1) (Note 2)	$R_{ hetaJA}$	600 400	°C/W
	(Note 1)	R <sub>θJA</sub>	600	°C/W
Junction to Ambient	(Note 1)		600 400	
Junction to Ambient  Junction and Storage Temperature Range	(Note 1)		600 400	
Junction to Ambient  Junction and Storage Temperature Range  THERMAL CHARACTERISTICS (SOT-723) (DTC114YM3)  Total Device Dissipation  T <sub>A</sub> = 25°C	(Note 1) (Note 2) (Note 1) (Note 2) (Note 1)	T <sub>J</sub> , T <sub>stg</sub>	600 400 -55 to +150 260 600 2.0	°C mW

- 1. FR-4 @ Minimum Pad.

- FR-4 @ 1.0 x 1.0 lnch Pad.
   FR-4 @ 100 mm<sup>2</sup>, 1 oz. copper traces, still air.
   FR-4 @ 500 mm<sup>2</sup>, 1 oz. copper traces, still air.

**Table 2. THERMAL CHARACTERISTICS** 

Characteristic		Symbol	Max	Unit
THERMAL CHARACTERISTICS (SOT-1123) (NSBC114YF3)				
Total Device Dissipation $T_{A} = 25^{\circ}C$ Derate above 25°C	(Note 3) (Note 4) (Note 3) (Note 4)	P <sub>D</sub>	254 297 2.0 2.4	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 3) (Note 4)	$R_{ hetaJA}$	493 421	°C/W
Thermal Resistance, Junction to Lead	(Note 3)	$R_{ hetaJL}$	193	°C/W
Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

- 1. FR-4 @ Minimum Pad.
- 2. FR-4 @ 1.0 x 1.0 Inch Pad.
- FR-4 @ 100 mm<sup>2</sup>, 1 oz. copper traces, still air.
   FR-4 @ 500 mm<sup>2</sup>, 1 oz. copper traces, still air.

Table 3. ELECTRICAL CHARACTERISTICS ( $T_A$  = 25  $^{\circ}$ C, unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS	•		•	•	
Collector–Base Cutoff Current $(V_{CB} = 50 \text{ V, } I_{E} = 0)$	I <sub>CBO</sub>	-	-	100	nAdc
Collector-Emitter Cutoff Current (V <sub>CE</sub> = 50 V, I <sub>B</sub> = 0)	I <sub>CEO</sub>	-	-	500	nAdc
Emitter-Base Cutoff Current $(V_{EB} = 6.0 \text{ V}, I_C = 0)$	I <sub>EBO</sub>	-	-	0.2	mAdc
Collector–Base Breakdown Voltage ( $I_C = 10 \mu A, I_E = 0$ )	V <sub>(BR)CBO</sub>	50	-	-	Vdc
Collector–Emitter Breakdown Voltage (Note 5) (I <sub>C</sub> = 2.0 mA, I <sub>B</sub> = 0)	V <sub>(BR)</sub> CEO	50	-	-	Vdc
ON CHARACTERISTICS					
DC Current Gain (Note 5) (I <sub>C</sub> = 5.0 mA, V <sub>CE</sub> = 10 V)	h <sub>FE</sub>	80	140	-	
Collector – Emitter Saturation Voltage (Note 5) $(I_C = 10 \text{ mA}, I_B = 0.3 \text{ mA})$	V <sub>CE(sat)</sub>	-	-	0.25	Vdc
Input Voltage (off) $(V_{CE} = 5.0 \text{ V}, I_{C} = 100 \mu\text{A})$	V <sub>i(off)</sub>	-	0.7	0.5	Vdc
Input Voltage (on) $(V_{CE} = 0.3 \text{ V}, I_{C} = 1.0 \text{ mA})$	V <sub>i(on)</sub>	1.4	0.8	-	Vdc
Output Voltage (on) $(V_{CC} = 5.0 \text{ V}, V_B = 2.5 \text{ V}, R_L = 1.0 \text{ k}\Omega)$	V <sub>OL</sub>	-	-	0.2	Vdc
Output Voltage (off) $(V_{CC} = 5.0 \text{ V}, V_B = 0.5 \text{ V}, R_L = 1.0 \text{ k}\Omega)$	V <sub>OH</sub>	4.9	-	-	Vdc
Input Resistor	R1	7.0	10	13	kΩ
Resistor Ratio	R <sub>1</sub> /R <sub>2</sub>	0.17	0.21	0.25	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulsed Condition: Pulse Width = 300 msec, Duty Cycle ≤ 2%.

# TYPICAL CHARACTERISTICS MUN2214, MMUN2214L, MUN5214, DTC114YE, DTC114YM3

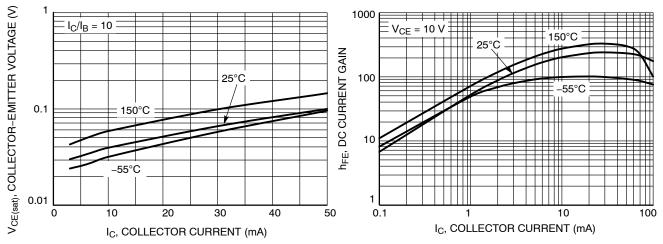


Figure 2. V<sub>CE(sat)</sub> vs. I<sub>C</sub>

Figure 3. DC Current Gain

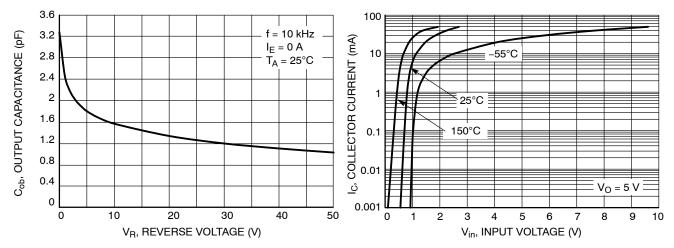


Figure 4. Output Capacitance

Figure 5. Output Current vs. Input Voltage




Figure 6. Input Voltage vs. Output Current

### TYPICAL CHARACTERISTICS NSBC114YF3

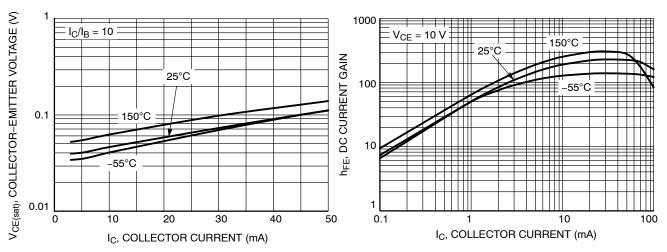


Figure 7.  $V_{CE(sat)}$  vs.  $I_{C}$ 

Figure 8. DC Current Gain

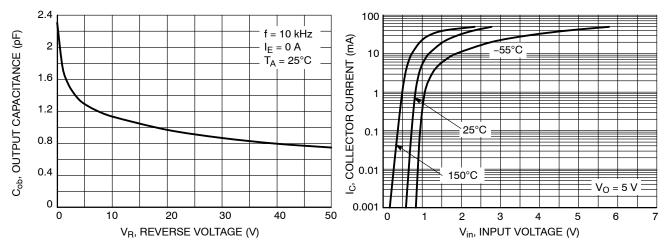


Figure 9. Output Capacitance

Figure 10. Output Current vs. Input Voltage




Figure 11. Input Voltage vs. Output Current

## **REVISION HISTORY**

Revision	Description of Changes	Date
5	Rebranded the Data Sheet to onsemi format	5/28/2025

**MILLIMETERS** 

MIN

0.89

0.01

0.37

0.08

2.80

1.20

1.78

0.30

0.35

2.10

O°

NOM

1.00

0.06

0.44

0.14

2.90

1.30

1.90

0.43

0.54

2.40

\_\_\_





### SOT-23 (TO-236) 2.90x1.30x1.00 1.90P **CASE 318 ISSUE AU**

**DATE 14 AUG 2024** 

MAX

1.11

0.10

0.50

0.20

3.04

1.40


2.04


0.55


0.69


2.64


10°













DIM

Α

Α1

b

С

D

Ε

е L

L1

HE

Τ

- DIMENSIONING AND TOLERANCING 1.
- PER ASME Y14.5M, 2018. CONTROLLING DIMENSIONS: MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE
- BASE MATERIAL.
  DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

### **GENERIC MARKING DIAGRAM\***



XXX = Specific Device Code

= Date Code

= Pb-Free Package

### RECOMMENDED MOUNTING FOOTPRINT

\* For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

### **STYLES ON PAGE 2**

DOCUMENT NUMBER:	98ASB42226B	Electronic versions are uncontrolled except when accessed directly from the Document F Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-23 (TO-236) 2.90x1.30x1.00 1.90P		PAGE 1 OF 2

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

# SOT-23 (TO-236) 2.90x1.30x1.00 1.90P CASE 318 ISSUE AU

DATE 14 AUG 2024

STYLE 1 THRU 5: CANCELLED	STYLE 6: PIN 1. BASE 2. EMITTER 3. COLLECTOR	STYLE 7: PIN 1. EMITTER 2. BASE 3. COLLECTOR	STYLE 8: PIN 1. ANODE 2. NO CONNECTION 3. CATHODE	1	
STYLE 9:	STYLE 10:	STYLE 11:	STYLE 12: PIN 1. CATHODE 2. CATHODE 3. ANODE	STYLE 13:	STYLE 14:
PIN 1. ANODE	PIN 1. DRAIN	PIN 1. ANODE		PIN 1. SOURCE	PIN 1. CATHODE
2. ANODE	2. SOURCE	2. CATHODE		2. DRAIN	2. GATE
3. CATHODE	3. GATE	3. CATHODE-ANODE		3. GATE	3. ANODE
STYLE 15:	STYLE 16:	STYLE 17:	STYLE 18:	STYLE 19:	STYLE 20:
PIN 1. GATE	PIN 1. ANODE	PIN 1. NO CONNECTION	PIN 1. NO CONNECTION	N PIN 1. CATHODE	PIN 1. CATHODE
2. CATHODE	2. CATHODE	2. ANODE	2. CATHODE	2. ANODE	2. ANODE
3. ANODE	3. CATHODE	3. CATHODE	3. ANODE	3. CATHODE-ANODE	3. GATE
STYLE 21:	STYLE 22:	STYLE 23:	STYLE 24:	STYLE 25:	STYLE 26:
PIN 1. GATE	PIN 1. RETURN	PIN 1. ANODE	PIN 1. GATE	PIN 1. ANODE	PIN 1. CATHODE
2. SOURCE	2. OUTPUT	2. ANODE	2. DRAIN	2. CATHODE	2. ANODE
3. DRAIN	3. INPUT	3. CATHODE	3. SOURCE	3. GATE	3. NO CONNECTION
STYLE 27: PIN 1. CATHODE 2. CATHODE 3. CATHODE	STYLE 28: PIN 1. ANODE 2. ANODE 3. ANODE				

DOCUMENT NUMBER:	98ASB42226B Electronic versions are uncontrolled except when accessed directly from the Document Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-23 (TO-236) 2.90x1.30x1.00 1.90P		PAGE 2 OF 2

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.






### SC-59-3 2.90x1.50x1.15, 1.90P CASE 318D ISSUE J


**DATE 15 FEB 2024** 


#### NOTES:

- DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
- 2. ALL DIMENSION ARE IN MILLIMETERS.

	MILLIMETERS			
DIM	MIN.	NOM.	MAX.	
Α	1.00	1.15	1.30	
A1	0.01	0.06	0.10	
b	0.35	0.43	0.50	
С	0.09	0.14	0.18	
D	2.70	2.90	3.10	
E	2.50	2.80	3.00	
E1	1.30	1.50	1.70	
е	1.90 BSC			
L	0.20	0.40	0.60	







# GENERIC MARKING DIAGRAM\*



XXX = Specific Device Code

M = Date Code

= Pb-Free Package\*

(\*Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

### RECOMMENDED MOUNTING FOOTPRINT\*

\* FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

STYLE 1:	STYLE 2:	STYLE 3:
PIN 1. BASE	PIN 1. ANODE	PIN 1. ANODE
2. EMITTER	2. N.C.	2. ANODE
3. COLLECTOR	3. CATHODE	<ol><li>CATHODE</li></ol>

STYLE 4:	STYLE 5:	STYLE 6:
PIN 1. CATHODE	PIN 1. CATHODE	PIN 1. ANODE
2. N.C.	2. CATHODE	2. CATHODE
3. ANODE	3. ANODE	<ol><li>ANODE/CATHODE</li></ol>

DOCUMENT NUMBER:	98ASB42664B	2664B Electronic versions are uncontrolled except when accessed directly from the Document Rep Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SC-59-3 2.90x1.50x1.15, 1	SC-59-3 2.90x1.50x1.15, 1.90P	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.






### SC-70 (SOT-323) CASE 419 ISSUE R


**DATE 11 OCT 2022** 

### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
- 2. CONTROLLING DIMENSION: INCH

	MILLIMETERS				INCHES	
DIM	MIN.	N□M.	MAX.	MIN.	N□M.	MAX.
Α	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2		0.70 REF			0.028 BS	C
b	0.30	0.35	0.40	0.012	0.014	0.016
С	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.00	2.20	0.071	0.080	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
е	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65 BSC			0.026 BS	C	
L	0.20	0.38	0.56	0.008	0.015	0.022
HE	2.00	2.10	2.40	0.079	0.083	0.095





# GENERIC MARKING DIAGRAM




XX = Specific Device Code

M = Date Code

■ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.



For additional information on our Pb-Free strategy and soldering details, please download the IIN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

SOLDERING FOOTPRINT

STYLE 1: CANCELLED	STYLE 2: PIN 1. ANODE 2. N.C. 3. CATHODE	STYLE 3: PIN 1. BASE 2. EMITTER 3. COLLECTOR	STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE	STYLE 5: PIN 1. ANODE 2. ANODE 3. CATHODE	
STYLE 6:	STYLE 7:	STYLE 8:	STYLE 9:	STYLE 10:	STYLE 11:
PIN 1. EMITTER	PIN 1. BASE	PIN 1. GATE	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. CATHODE
2. BASE	2. EMITTER	2. SOURCE	2. CATHODE	2. ANODE	<ol><li>CATHODE</li></ol>
<ol><li>COLLECTOR</li></ol>	<ol><li>COLLECTOR</li></ol>	3. DRAIN	<ol><li>CATHODE-ANODE</li></ol>	3. ANODE-CATHODE	<ol><li>CATHODE</li></ol>

DOCUMENT NUMBER:	98ASB42819B	Electronic versions are uncontrolled except when accessed directly from the Document Reportant Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SC-70 (SOT-323)		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



### SC75-3 1.60x0.80x0.80, 1.00P


**CASE 463 ISSUE H** 


**DATE 01 FEB 2024** 


### NOTES:

- DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
- ALL DIMENSION ARE IN MILLIMETERS.

DIM	MILLIMETERS				
I UINI	MIN.	NOM.	MAX.		
А	0.70	0.80	0.90		
A1	0.00	0.05	0.10		
A2	(	0.80 REF.			
b	0.15	0.20	0.30		
С	0.10	0.15	0.25		
D	1.55	1.60	1.65		
Е	1.50	1.60	1.70		
E1	0.70	0.80	0.90		
е	1.00 BSC				
L	0.10	0.15	0.20		







SIDE VIEW

### **GENERIC MARKING DIAGRAM\***



XX = Specific Device Code

Μ = Date Code

= Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.


STYLE 1:	
PIN 1. BASE	
2. EMITTER	

3 COLLECTOR

STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE

> GATE SOURCE

STYLE 3: PIN 1. ANODE 2. ANODE 3 CATHODE



### RECOMMENDED MOUNTING FOOTPRINT\*

FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

STYLE 4:	STYLE 5:
PIN 1. CATHODE	PIN 1. GATE
<ol><li>CATHODE</li></ol>	2. SOURC
<ol><li>ANODE</li></ol>	<ol><li>DRAIN</li></ol>

**DOCUMENT NUMBER:** 

Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION:** SC75-3 1.60x0.80x0.80, 1.00P

98ASB15184C

PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.









### SOT-1123 0.80x0.60x0.37, 0.35P CASE 524AA ISSUE D

**DATE 18 JAN 2024** 

#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018. 1.
- CONTROLLING DIMENSION: MILLIMETERS. 2.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.







### RECOMMENDED MOUNTING FOOTPRINT

\*For additional information on our Pb-Free strategy and soldering details, please download the IN Semiconductor Soldering and Mounting Techniques Reference manual, SOLDERRM/D.

# В ТПР VIEW





### **GENERIC MARKING DIAGRAM\***



= Specific Device Code

= Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:
PIN 1. BASE
2 FMITTER
3. COLLECTOR

STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE

STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE

STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE

STYLE 5: PIN 1. GATE 2. SOURCE

DOCUMENT NUMBER:	98AON23134D	Electronic versions are uncontrolled except when accessed directly from the Document Report Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-1123 0.80x0.60x0.37, 0.35P		PAGE 1 OF 1

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.









### SOT-723 1.20x0.80x0.50, 0.40P CASE 631AA ISSUE E


**DATE 24 JAN 2024** 


#### NOTES:


- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018. CONTROLLING DIMENSION: MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.











### RECOMMENDED MOUNTING FOOTPRINT

\*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

### **GENERIC MARKING DIAGRAM\***



XX = Specific Device Code = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1:	STYLE 2:	STYLE 3:	STYLE 4:	STYLE 5:
PIN 1. BASE	PIN 1. ANODE	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. GATE
<ol><li>EMITTER</li></ol>	2. N/C	2. ANODE	2. CATHODE	<ol><li>SOURCE</li></ol>
<ol><li>COLLECTOR</li></ol>	<ol><li>CATHODE</li></ol>	<ol><li>CATHODE</li></ol>	<ol><li>ANODE</li></ol>	<ol><li>DRAIN</li></ol>

DOCUMENT NUMBER:	98AON12989D	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-723 1.20x0.80x0.50, 0.40P		PAGE 1 OF 1

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.org/www.onsemi.or

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

