
Photomicrosensor (Transmissive)
EE-SX3162/3163/3164-P Series
EE-SX4162/4163/4164-P Series
EE-5002 1M

Slot / Connector Type


- Photo IC output (Dark-ON / Light ON)
- Connector with strong lock manufactured by JST. Mates with GHR-03.
- Mounted with M2 screws
- Models available for 5-V or 12-V power supply.
- Zener diode mounted for greater noise immunity (EE-SX3162-P1-Z and EE-SX4162-P1-Z only).
- Connector with cable (Order Separately) is available. EE-5002 1M (Refer to page 5.)

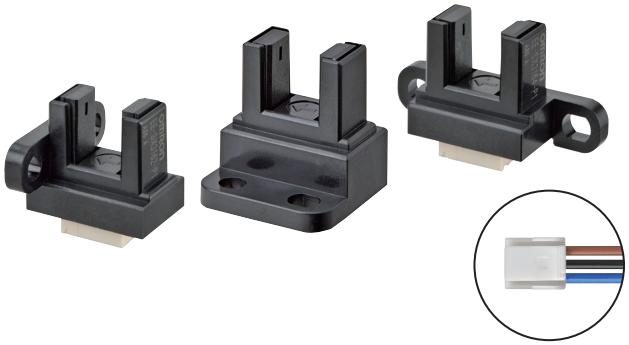

⚠ **Be sure to read *Safety Precautions* on page 3.**


Features

Models with Connectors Eliminate the Need for a Separate PCB
All-in-One Structure Facilitates Downsizing

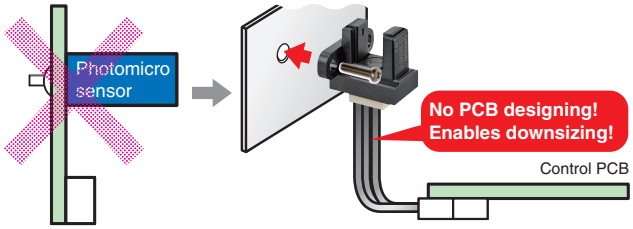

Models Available for Mounting on X, Y, and Z Axes

Models with connectors are available with different mounting directions.

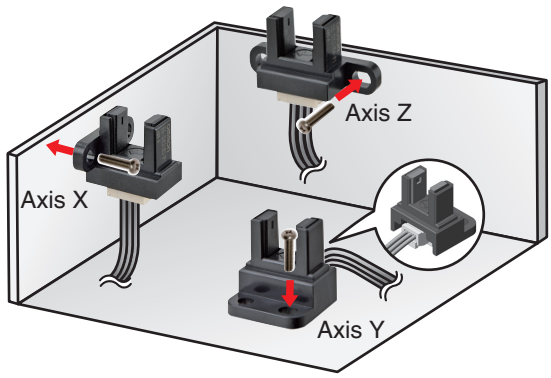

Application



Office Automation Equipment (Copier, Printer)



Amusement Equipment



Home Appliances (Air Cleaner)





Vending Machine, ATM

Downloaded from Arrow.com.

Ordering Information

Photomicrosensor

Appearance	Sensing method	Connecting method	Sensing distance	Aperture size (H × W) (mm)	Output type	Power supply voltage	Output configuration	Model
Side mounting 	Transmissive (slot type)	Connector	5 mm (Slot width)	Emitter 1.4 x 1.4 Detector 1.4 x 0.5	Photo IC	12 VDC	Dark-ON	**EE-SX3162-P1**
								EE-SX3162-P1-Z
							Light-ON	**EE-SX4162-P1**
								EE-SX4162-P1-Z
						5 VDC	Dark-ON	**EE-SX3162-P2**
							Light-ON	**EE-SX4162-P2**
L-shaped mounting 						12 VDC	Dark-ON	**EE-SX3163-P1**
							Light-ON	**EE-SX4163-P1**
						5 VDC	Dark-ON	**EE-SX3163-P2**
							Light-ON	**EE-SX4163-P2**
Horizontal mounting 						12 VDC	Dark-ON	**EE-SX3164-P1**
							Light-ON	**EE-SX4164-P1**
						5 VDC	Dark-ON	**EE-SX3164-P2**
							Light-ON	**EE-SX4164-P2**

Ratings, Characteristics and Exterior Specifications

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rated value		Unit	Remarks
		EE-SX3162-P1 EE-SX3162-P1-Z EE-SX3163-P1 EE-SX3164-P1 EE-SX4162-P1 EE-SX4162-P1-Z EE-SX4163-P1 EE-SX4164-P1	**EE-SX3162-P2 EE-SX3163-P2 EE-SX3164-P2 EE-SX4162-P2 EE-SX4163-P2 EE-SX4164-P2**		
Power supply voltage	V_{CC}	13.2 DC	5.5 DC	V	—
Output voltage	V_{OUT}	13.2		V	—
Output current	I_{OUT}	16		mA	—
Permissible output dissipation	P_{OUT}	80		mW	—*
Operating temperature	T_{opr}	-20 to +85		°C	—*
Storage temperature	T_{stg}	-30 to +85		°C	—*

* Even if the specified conditions are met, perform derating of the voltage and current as required by the temperature rating diagram. Also, do not expose the product to freezing or condensation.

Exterior Specifications


	Appearance	Side mounting	L-shaped mounting	Horizontal mounting
	Item	**EE-SX3162-P1 EE-SX3162-P1-Z EE-SX4162-P1 EE-SX4162-P1-Z EE-SX3162-P2 EE-SX4162-P2**	**EE-SX3163-P1 EE-SX4163-P1 EE-SX3163-P2 EE-SX4163-P2**	**EE-SX3164-P1 EE-SX4164-P1 EE-SX3164-P2 EE-SX4164-P2**
Connecting method		Connector		
Weight		Approx. 1.2 g	Approx.1.4 g	Approx. 1.1 g
Material	**Case**	Polybutylene terephthalate (PBT)		
	Emitter and receiver sections	Polyphenylene sulfide (PPS)		

Electrical and Optical Characteristics

(Ta = 25°C)

Item	Symbol		Rated value	
			12 VDC model	**5 VDC model**
		Dark-ON	**EE-SX3162-P1 EE-SX3162-P1-Z EE-SX3163-P1 EE-SX3164-P1**	**EE-SX3162-P2 EE-SX3163-P2 EE-SX3164-P2**
		Light-ON	**EE-SX4162-P1 EE-SX4162-P1-Z EE-SX4163-P1 EE-SX4164-P1**	**EE-SX4162-P2 EE-SX4163-P2 EE-SX4164-P2**
Power supply voltage	V_{CC}		10.8 to 13.2VDC	4.5 to 5.5 VDC
Current consumption	I_{CC}		25 mA max. (With and without incident)	
Low-level output voltage	V_{OL}		0.3 V max. (I_{OUT}=16 mA) (Dark-ON: without incident, Light-ON: with incident)	
High-level output voltage	V_{OH}		(V_{CC}×0.9 V min. (V_{OUT}=V_{CC}, R_L=47 kΩ)) (Dark-ON: with incident, Light-ON: without incident)	
Response frequency	f		3 kHz min. (V_{OUT}=V_{CC}, I_{OUT}=16 mA *1)	
			1 kHz min. (V_{OUT}=V_{CC}, I_{OUT}=16 mA *1,*2)	

1. The value of the response frequency is measured by rotating the disk as shown below.

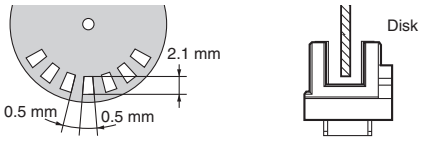

2. Only with models ending in -Z.

Downloaded from Arrow.com.

Engineering Data (Reference value)

Fig 1. Output Allowable Dissipation vs. Ambient Temperature Characteristics

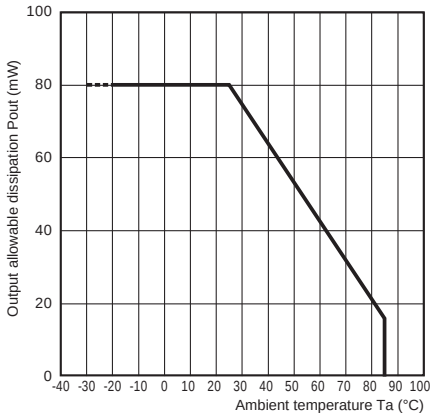


Fig 2. Sensing Position Characteristics (Typical)


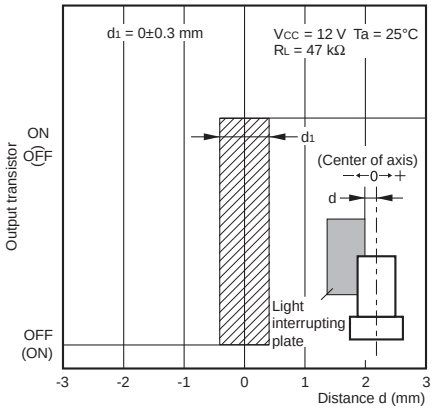


Fig 3. Sensing Position Characteristics (Typical)

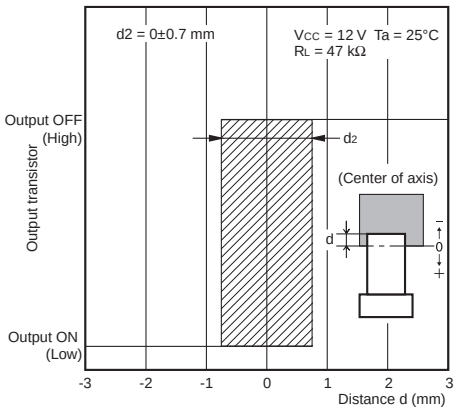

Safety Precautions

To ensure safe operation, be sure to read and follow the Instruction Manual provided with the Sensor.

⚠ CAUTION

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Precautions for Safe Use

Do not use the product with a voltage or current that exceeds the rated range.

Applying a voltage or current that is higher than the rated range may result in explosion or fire.

Do not miswire such as the polarity of the power supply voltage.

Otherwise the product may be damaged or it may burn.

Do not short-circuit the load.

Otherwise explosion or burning may occur.

This product does not resist water. Do not use the product in places where water or oil may be sprayed onto the product.

Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

Dispose of this product as industrial waste.

Downloaded from Arrow.com.


Dimensions and Internal Circuit

(Unit: mm)

Photomicrosensor


EE-SX3162-P1
EE-SX3162-P1-Z
EE-SX4162-P1
EE-SX4162-P1-Z
EE-SX3162-P2
EE-SX4162-P2



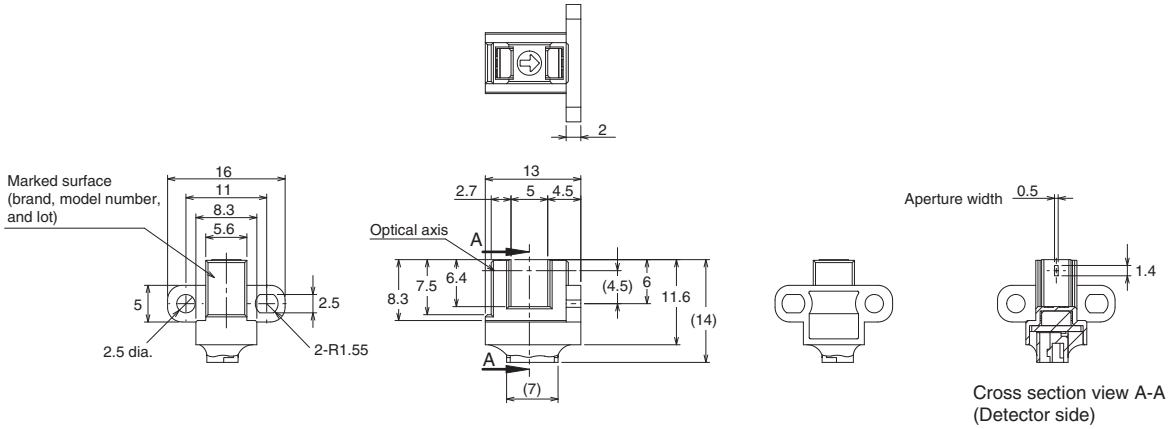



Aperture size (H × W)

Emitter	Detector
1.4 × 1.4	1.4 × 0.5



Internal Circuit





Note: Only with models ending in -Z.

Terminal No.	Name
(1)	Ground (GND)
(2)	Output (OUT)
(3)	Power supply (Vcc)


Unless otherwise specified, the tolerances are as shown below.

Dimensions	Tolerance
3 mm max.	±0.2
3 < mm ≤ 6	±0.24
6 < mm ≤ 10	±0.29
10 < mm ≤ 18	±0.35
18 < mm ≤ 30	±0.42

Note: Dimensions in parentheses are for reference only.

EE-SX3163-P1
EE-SX4163-P1
EE-SX3163-P2
EE-SX4163-P2




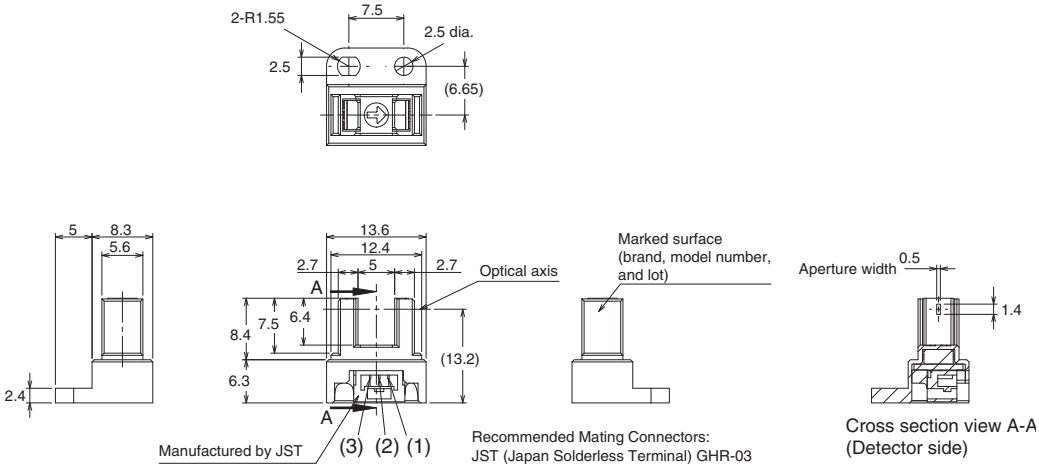

Aperture size (H × W)

Emitter	Detector
1.4 × 1.4	1.4 × 0.5

Internal Circuit



Terminal No.	Name
(1)	Ground (GND)
(2)	Output (OUT)
(3)	Power supply (Vcc)


Unless otherwise specified, the tolerances are as shown below.

Dimensions	Tolerance
3 mm max.	±0.2
3 < mm ≤ 6	±0.24
6 < mm ≤ 10	±0.29
10 < mm ≤ 18	±0.35
18 < mm ≤ 30	±0.42

Note: Dimensions in parentheses are for reference only.


Downloaded from Arrow.com.


EE-SX3164-P1
EE-SX4164-P1
EE-SX3164-P2
EE-SX4164-P2




Aperture size (H × W)

Emitter	Detector
1.4 × 1.4	1.4 × 0.5



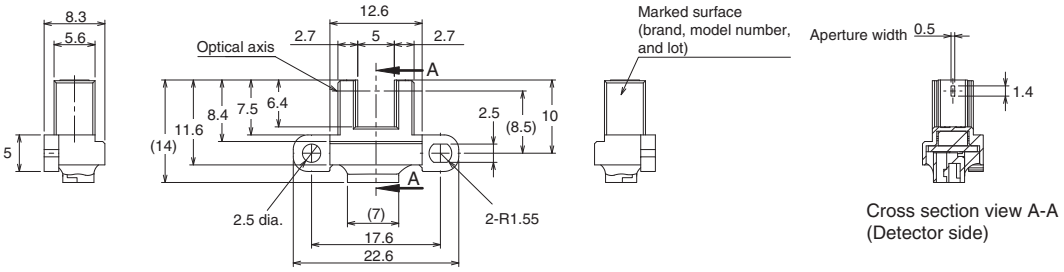


Cross section view A-A
(Detector side)



Recommended Mating Connectors:
JST (Japan Solderless Terminal) GHR-03

Internal Circuit



Terminal No.	Name
(1)	Ground (GND)
(2)	Output (OUT)
(3)	Power supply (V_{CC})


Unless otherwise specified, the tolerances are as shown below.

Dimensions	Tolerance
3 mm max.	±0.2
3 < mm ≤ 6	±0.24
6 < mm ≤ 10	±0.29
10 < mm ≤ 18	±0.35
18 < mm ≤ 30	±0.42

Note: Dimensions in parentheses are for reference only.

Connector with cable (Order Separately)

EE-5002 1M

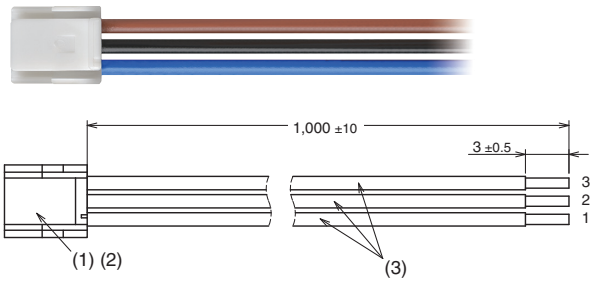

No.	Name	Model/ Specifications	Quantity	Manufacturer
(1)	Connector, HS for 101-150 harness	GHR-03V-S	1	JST
(2)	Connector, CT for 101-150 harness	SSHL-002TP0.2	3	JST
(3)	Lead wires	UL1061 AWG26	3	—

Wiring

Connector circuit number	Lead-wire color
1	Blue
2	Black
3	Brown

Downloaded from Arrow.com.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas
https://www.components.omron.com/

Europe
http://components.omron.eu/

Asia-Pacific
https://ecb.omron.com.sg/

China
https://www.ecb.omron.com.cn/

Korea
https://www.omron-ecb.co.kr/

Japan
https://www.omron.co.jp/ecb/

© OMRON Corporation 2016-2020 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. E460-E1-04
0820 (1016)

Downloaded from Arrow.com.