


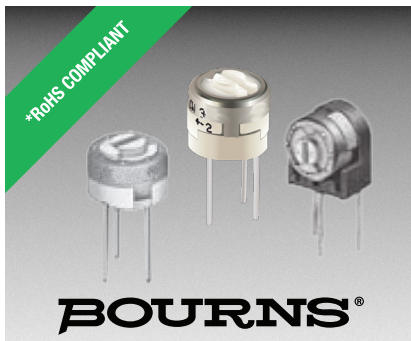


Features

- 1/4 " Round / Single-turn / Cermet / Sealed
- Units can be pre-adjusted at clockwise, counter-clockwise or standard 50 % position
- Flammability: UL 94V-0
- RoHS compliant*
- For trimmer applications/processing guidelines, [click here](#)


PV32 Series – Lead Sealed Type Single-Turn Trimming Potentiometer

Product Dimensions


PV32H

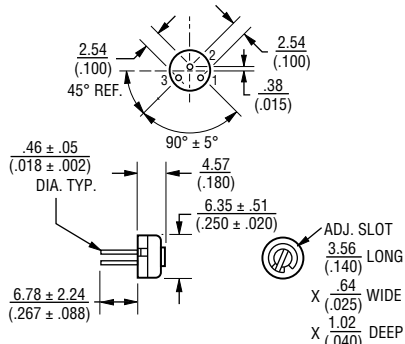

PV32P




PV32N

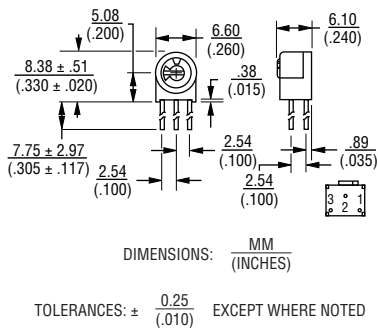


Recommended PCB Layout


PV32H

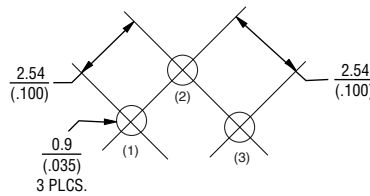

PV32P and PV32N

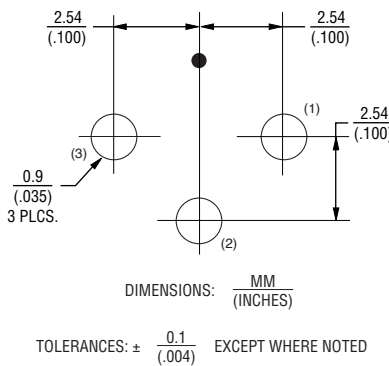

Schematic



Additional Information

Click these links for more information:



Standard Resistance Table

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
250	251
500	501
1,000	102
2,000	202
2,500	252
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105

Popular distribution values listed in **boldface**.
 Special resistances available.

How To Order

Product ID _____ PV 32 P 103 A01 B00

PV = Trimming Potentiometer

Series _____

32 = Lead Sealed 6 mm Round Single-turn

Adjustment Direction/Lead Type _____

H = Top, Triangle
 P = Top, Triangle
 N = Side, Triangle

Resistance Code _____

See Standard Resistance Table

Individual Specification _____

A01 = Standard Type
 A02 = 10 % Resistance Tolerance

Packaging _____

B00 = Tube (50 pcs. per tube)



WARNING Cancer and Reproductive Harm - www.P65Warnings.ca.gov

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.
 Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

PV32 Series – Lead Sealed Type Single-Turn Trimming Potentiometer

BOURNS®

Top Adjustment

Model Number	Power Rating @ 70 °C (W)	Number of Turns (Effective Rotation Angle)	Mechanical Rotation Angle	Total Resistance Value (Ω)	Resistance Tolerance	TCR (ppm/°C)
PV32H100A0xB00	0.5	1 (240 ° ±5 °)	260 ° ±5 °	10	±20 %	±100
PV32H200A0xB00				20		
PV32H500A0xB00				50		
PV32H101A0xB00				100		
PV32H201A0xB00				200		
PV32H251A0xB00				250		
PV32H501A0xB00				500		
PV32H102A0xB00				1k		
PV32H202A0xB00				2k		
PV32H252A0xB00				2.5k		
PV32H502A0xB00				5k		
PV32H103A0xB00				10k		
PV32H203A0xB00				20k		
PV32H253A0xB00				25k		
PV32H503A0xB00				50k		
PV32H104A0xB00				100k		
PV32H204A0xB00				200k		
PV32H254A0xB00				250k		
PV32H504A0xB00				500k		
PV32H105A0xB00				1M		

Operating Temperature Range: -55 to 125 °C

Soldering Method: Wave (Single and Dual)

Typical Part Marking

3-Digit Date Code and Manufacturing Code

- First digit indicates year of manufacture;
- Last two digits indicate week of manufacture;
- 4th digit is suffix for manufacturing location:
C = Costa Rica

EX: 604C = Manufactured in 2016,
week 4, Costa Rica

Resistance Code

- Resistance code marking as shown in the Standard Resistance Table.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

PV32 Series – Lead Sealed Type Single-Turn Trimming Potentiometer

BOURNS®

Top Adjustment (Continued)

Model Number	Power Rating @ 70 °C (W)	Number of Turns (Effective Rotation Angle)	Mechanical Rotation Angle	Total Resistance Value (Ω)	Resistance Tolerance	TCR (ppm/°C)
PV32P100A0xB00	0.5	1 (240 ° ±5 °)	260 ° ±5 °	10	±20 %	±100
PV32P200A0xB00				20		
PV32P500A0xB00				50		
PV32P101A0xB00				100		
PV32P201A0xB00				200		
PV32P251A0xB00				250		
PV32P501A0xB00				500		
PV32P102A0xB00				1k		
PV32P202A0xB00				2k		
PV32P252A0xB00				2.5k		
PV32P502A0xB00				5k		
PV32P103A0xB00				10k		
PV32P203A0xB00				20k		
PV32P253A0xB00				25k		
PV32P503A0xB00				50k		
PV32P104A0xB00				100k		
PV32P204A0xB00				200k		
PV32P254A0xB00				250k		
PV32P504A0xB00				500k		
PV32P105A0xB00				1M		

Operating Temperature Range: -55 to 125 °C

Soldering Method: Wave (Single and Dual)

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

PV32 Series – Lead Sealed Type Single-Turn Trimming Potentiometer

BOURNS®

Side Adjustment

Model Number	Power Rating @ 70 °C (W)	Number of Turns (Effective Rotation Angle)	Mechanical Rotation Angle	Total Resistance Value (Ω)	Resistance Tolerance	TCR (ppm/°C)
PV32N100A0xB00	0.5	1 (240 ° ±5 °)	260 ° ±5 °	10	±20 %	±100
PV32N200A0xB00				20		
PV32N500A0xB00				50		
PV32N101A0xB00				100		
PV32N201A0xB00				200		
PV32N251A0xB00				250		
PV32N501A0xB00				500		
PV32N102A0xB00				1k		
PV32N202A0xB00				2k		
PV32N252A0xB00				2.5k		
PV32N502A0xB00				5k		
PV32N103A0xB00				10k		
PV32N203A0xB00				20k		
PV32N253A0xB00				25k		
PV32N503A0xB00				50k		
PV32N104A0xB00				100k		
PV32N204A0xB00				200k		
PV32N254A0xB00				250k		
PV32N504A0xB00				500k		
PV32N105A0xB00				1M		

Operating Temperature Range: -55 to 125 °C

Soldering Method: Wave (Single and Dual)

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

REV. 10/23

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain "typical" applications are based on Bourns' knowledge of typical requirements in generic applications. Bourns assumes that "typical" applications include failsafe/backup features to address critical risks to users and are designed to allow rework of Bourns® product to avoid scrap of a device solely due to malfunctioning Bourns® product. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Thus, users should always verify the actual performance of the Bourns® product in their specific devices and applications and make their own independent judgments regarding the suitability of Bourns® product and the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real-world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification even if such industry standard or qualification is a "state of art". Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage, such as without limitation nuclear, life-critical medical and certain automotive and aviation applications. Except as set forth in the bullet points below or unless expressly and specifically approved in writing on a case-by-case basis by an authorized Bourns' representative, use of any Bourns® products in such unauthorized high-risk applications is at the user's sole risk.

- Bourns considers implantable/invasive devices and devices/procedures designed as life-supporting or life-sustaining by the U.S. Food and Drug Administration or equivalent organizations outside of the United States as "life-critical" medical applications. Bourns expressly identifies those Bourns® standard products that are suitable for use in typical medical applications that are not life-critical in its publication entitled "Bourns Medical Grade Component Guide."
- Bourns expressly identifies those Bourns® standard products that are suitable for use in typical automotive applications associated with any Automate Safety Integrity Level (ASIL) in its publication entitled "Bourns Automotive Grade Component Guide." Bourns' designation of Bourns® product as compliant with the AEC-Q standard does not by itself mean that Bourns has approved such product for use in an automotive application.
- Bourns expressly identifies Bourns® standard products that are suitable for use in the typical aviation applications/systems requiring System Design Assurance Level (RTCA DO-254 DAL) of C, D or E in its publication entitled "Bourns Civilian Aerospace/Aviation Grade Component Guide." Bourns does not test its products for compliance with United States Federal Aviation Administration standards or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aviation applications. Use of Bourns® standard components in aviation applications associated with RTCA DO-254 DAL A or B without proper approval noted above shall be at the user's sole risk.
- Bourns will review and authorize on a case-by-case basis the use of Bourns® standard products which are at least AEC-Q compliant in space-related civil applications (rockets, satellites) with a negotiated cross-waiver and indemnity agreement.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Use of Bourns® products or Bourns' technology in military/defense applications must be reviewed with Bourns for compliance with applicable export control laws and embargoes. Users shall not sell, transfer, export or re-export (which includes transfers within a country) any Bourns® products or technology or technical data for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology or technical data in any facility which engages in activities relating to such devices. Further, Bourns® products and Bourns' technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products and technology may not, without prior authorization from Bourns and/or the Government of a country where such product/technology is designed and/or manufactured, be resold, transferred, or re-exported (including within the same country) to any party not eligible to receive commodities, software, and technical data originating in such country.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties (those not based on parameters specified in Bourns' data sheets and/or specifications), including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <https://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <https://www.bourns.com/docs/Legal/disclaimer.pdf>