

Bipolar Power Transistors

40 V, 3.0 A, Low $V_{CE(sat)}$

NPN Transistor

NSS40301MZ4

onsemi's e²PowerEdge family of low $V_{CE(sat)}$ transistors are surface mount devices featuring ultra low saturation voltage ($V_{CE(sat)}$) and high current gain capability. These are designed for use in low voltage, high speed switching applications where affordable efficient energy control is important.

Typical applications are DC-DC converters and power management in portable and battery powered products such as cellular and cordless phones, PDAs, computers, printers, digital cameras and MP3 players. Other applications are low voltage motor controls in mass storage products such as disc drives and tape drives. In the automotive industry they can be used in air bag deployment and in the instrument cluster. The high current gain allows e²PowerEdge devices to be driven directly from PMU's control outputs, and the Linear Gain (Beta) makes them ideal components in analog amplifiers.

Features

- Complement to NSS40300MZ4 Series
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	40	Vdc
Collector-Base Voltage	V_{CB}	40	Vdc
Emitter-Base Voltage	V_{EB}	6.0	Vdc
Base Current – Continuous	I_B	1.0	Adc
Collector Current – Continuous	I_C	3.0	Adc
Collector Current – Peak	I_{CM}	5.0	Adc
Total Power Dissipation Total P_D @ $T_A = 25^\circ\text{C}$ (Note 1) Total P_D @ $T_A = 25^\circ\text{C}$ (Note 2)	P_D	2.0 0.80	W
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Mounted on 1" sq. (645 sq. mm) Collector pad on FR-4 bd material.
2. Mounted on 0.012" sq. (7.6 sq. mm) Collector pad on FR-4 bd material.


NPN TRANSISTOR

3.0 AMPERES

40 VOLTS, 2.0 WATTS




Schematic




SOT-223
CASE 318E
STYLE 1

MARKING DIAGRAM



- A = Assembly Location
Y = Year
W = Work Week
40301 = Specific Device Code
▪ = Pb-Free Package

PIN ASSIGNMENT



Top View Pinout

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

NSS40301MZ4

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case Junction-to-Ambient on 1" sq. (645 sq. mm) Collector pad on FR-4 bd material Junction-to-Ambient on 0.012" sq. (7.6 sq. mm) Collector pad on FR-4 bd material	$R_{\theta JA}$ $R_{\theta JA}$	64 155	$^{\circ}\text{C/W}$
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 5 seconds	T_L	260	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage ($I_C = 10 \text{ mAdc}$, $I_B = 0 \text{ Adc}$)	$V_{CEO(sus)}$	40	–	–	Vdc
Emitter-Base Voltage ($I_E = 50 \mu\text{Adc}$, $I_C = 0 \text{ Adc}$)	V_{EBO}	6.0	–	–	Vdc
Collector Cutoff Current ($V_{CB} = 40 \text{ Vdc}$)	I_{CBO}	–	–	100	nAdc
Emitter Cutoff Current ($V_{BE} = 6.0 \text{ Vdc}$)	I_{EBO}	–	–	100	nAdc

ON CHARACTERISTICS (Note 3)

Collector-Emitter Saturation Voltage ($I_C = 0.5 \text{ Adc}$, $I_B = 50 \text{ mAdc}$) ($I_C = 1.0 \text{ Adc}$, $I_B = 20 \text{ mAdc}$) ($I_C = 3.0 \text{ Adc}$, $I_B = 0.3 \text{ Adc}$)	$V_{CE(sat)}$	– – –	– – –	0.050 0.100 0.200	Vdc
Base-Emitter Saturation Voltage ($I_C = 1.0 \text{ Adc}$, $I_B = 0.1 \text{ Adc}$)	$V_{BE(sat)}$	–	–	1.0	Vdc
Base-Emitter On Voltage ($I_C = 1.0 \text{ Adc}$, $V_{CE} = 2.0 \text{ Vdc}$)	$V_{BE(on)}$	–	–	0.9	Vdc
DC Current Gain ($I_C = 0.5 \text{ Adc}$, $V_{CE} = 1.0 \text{ Vdc}$) ($I_C = 1.0 \text{ Adc}$, $V_{CE} = 1.0 \text{ Vdc}$) ($I_C = 3.0 \text{ Adc}$, $V_{CE} = 1.0 \text{ Vdc}$)	h_{FE}	220 200 100	– – –	500	–

DYNAMIC CHARACTERISTICS

Output Capacitance ($V_{CB} = 10 \text{ Vdc}$, $f = 1.0 \text{ MHz}$)	C_{ob}	–	25	–	pF
Input Capacitance ($V_{EB} = 5.0 \text{ Vdc}$, $f = 1.0 \text{ MHz}$)	C_{ib}	–	170	–	pF
Current-Gain – Bandwidth Product (Note 4) ($I_C = 500 \text{ mA}$, $V_{CE} = 10 \text{ V}$, $f_{test} = 1.0 \text{ MHz}$)	f_T	–	215	–	MHz

3. Pulse Test: Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2\%$.

4. $f_T = |h_{FE}| \cdot f_{test}$

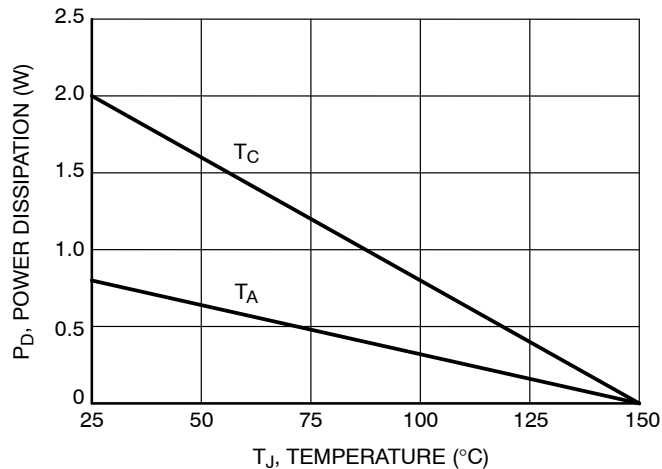


Figure 1. Power Derating

TYPICAL CHARACTERISTICS

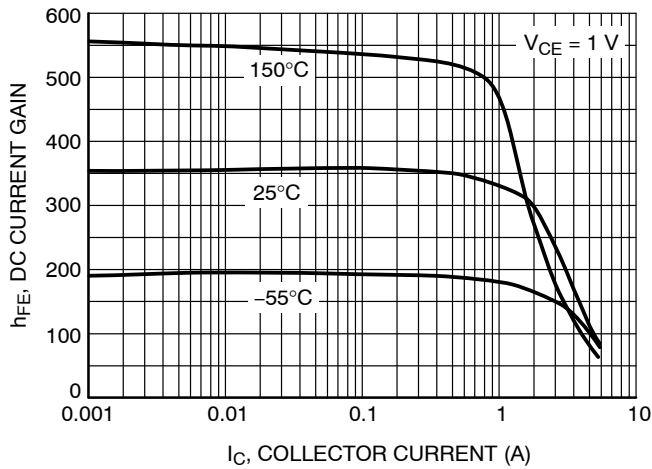


Figure 2. DC Current Gain

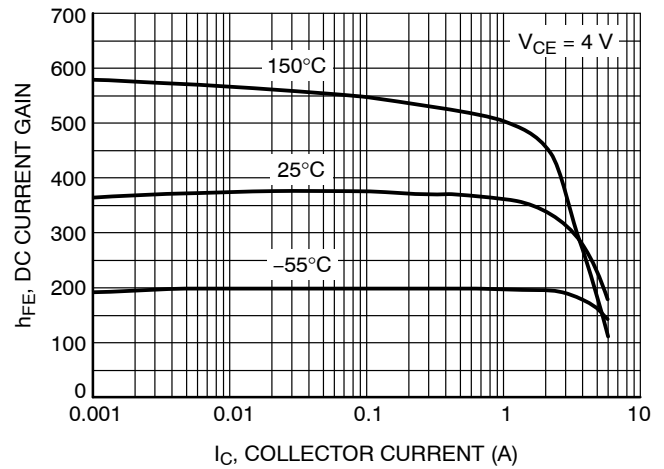


Figure 3. DC Current Gain

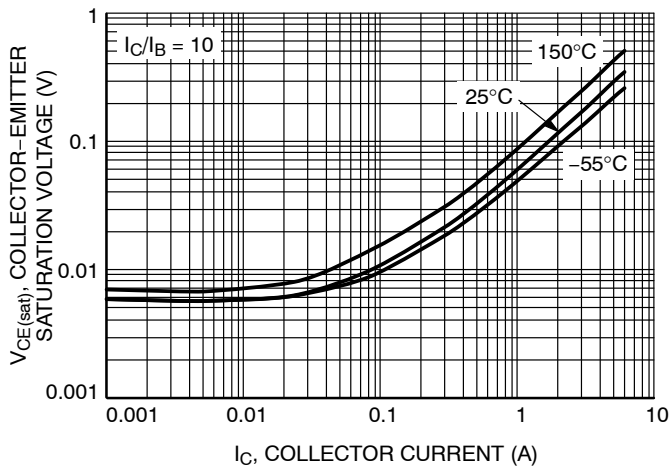


Figure 4. Collector-Emitter Saturation Voltage

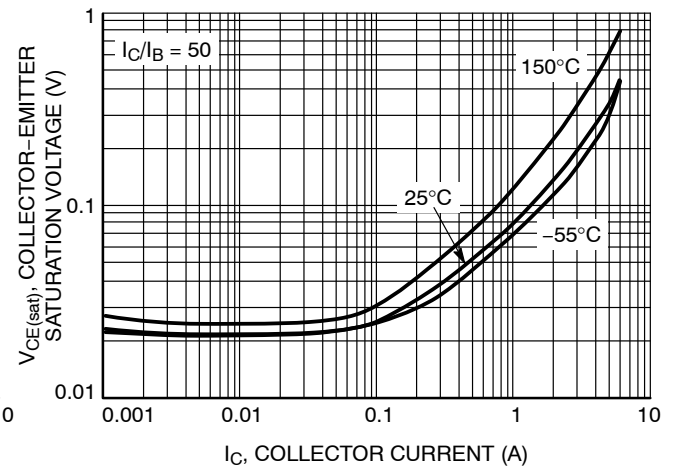


Figure 5. Collector-Emitter Saturation Voltage

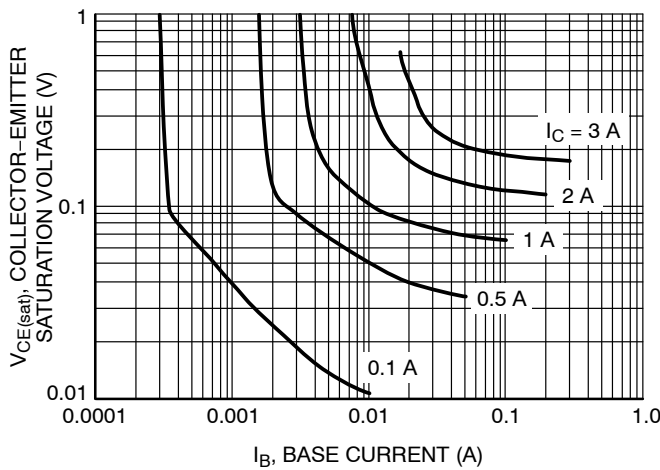


Figure 6. Collector Saturation Region

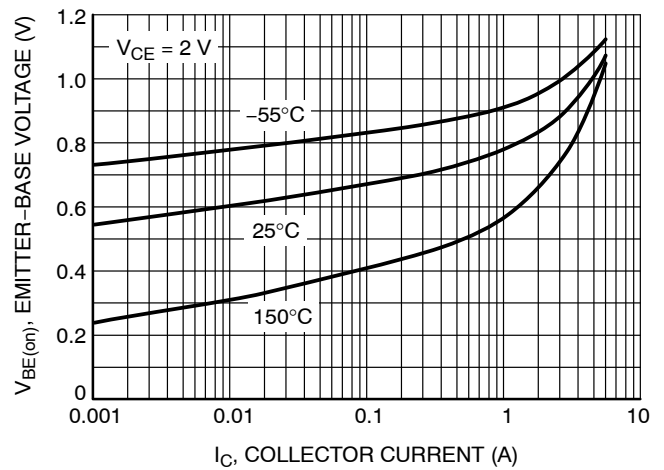


Figure 7. $V_{BE(on)}$ Voltage

TYPICAL CHARACTERISTICS

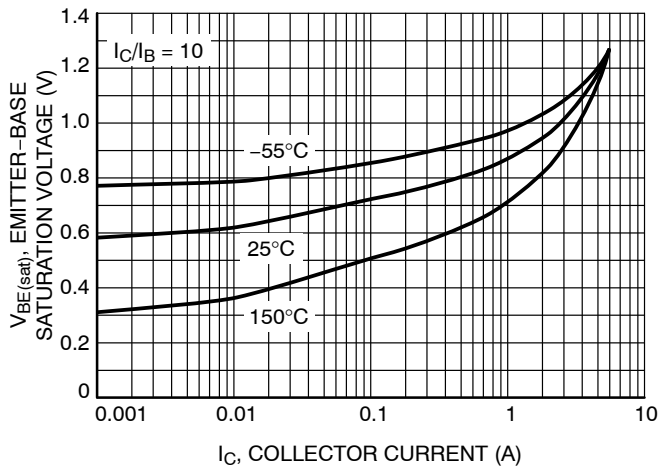


Figure 8. Base-Emitter Saturation Voltage

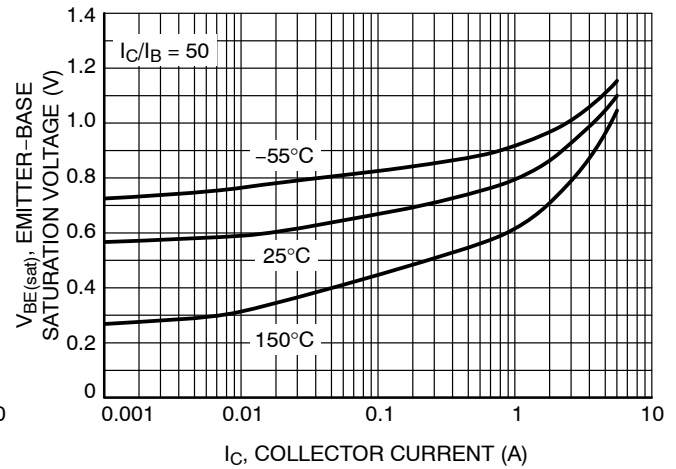


Figure 9. Base-Emitter Saturation Voltage

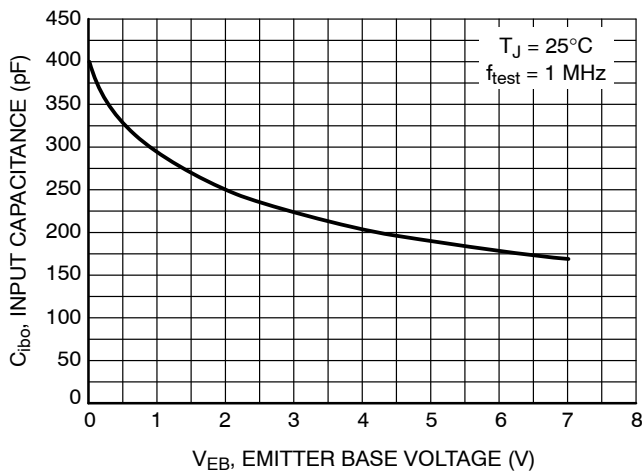


Figure 10. Input Capacitance

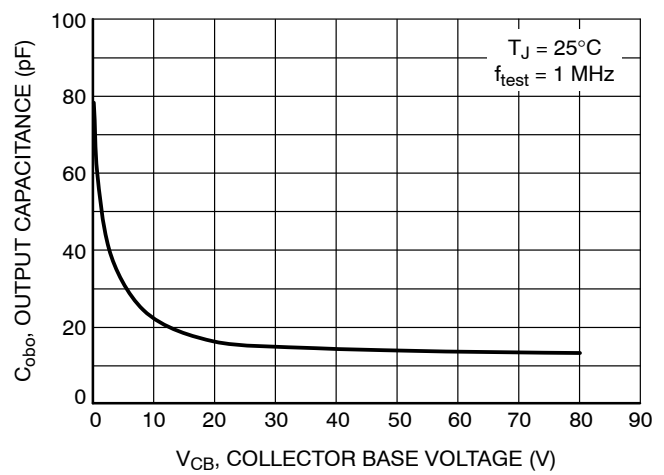


Figure 11. Output Capacitance

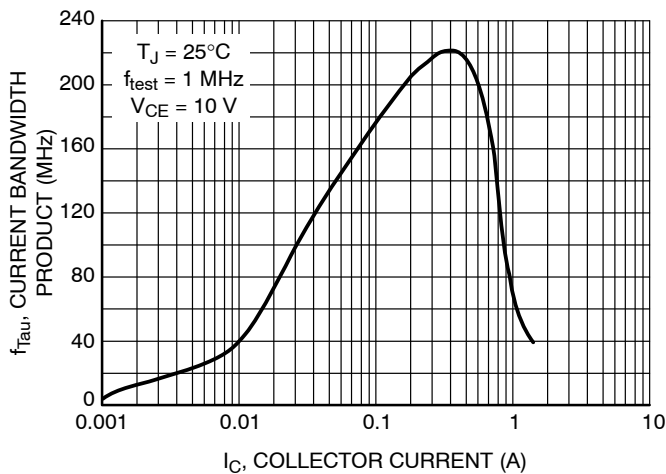


Figure 12. Current-Gain Bandwidth Product

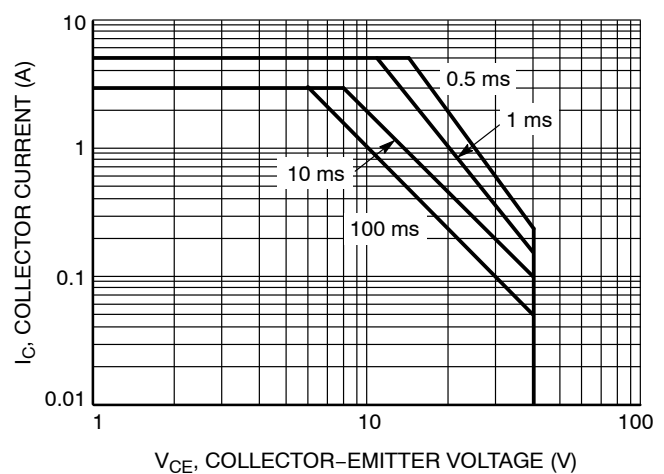


Figure 13. Safe Operating Area

NSS40301MZ4

ORDERING INFORMATION

Device	Package	Shipping [†]
NSS40301MZ4T1G	SOT-223 (Pb-Free)	1,000 / Tape & Reel
NSV40301MZ4T1G*	SOT-223 (Pb-Free)	1,000 / Tape & Reel
NSS40301MZ4T3G	SOT-223 (Pb-Free)	4,000 / Tape & Reel
NSV40301MZ4T3G*	SOT-223 (Pb-Free)	4,000 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

*NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

