

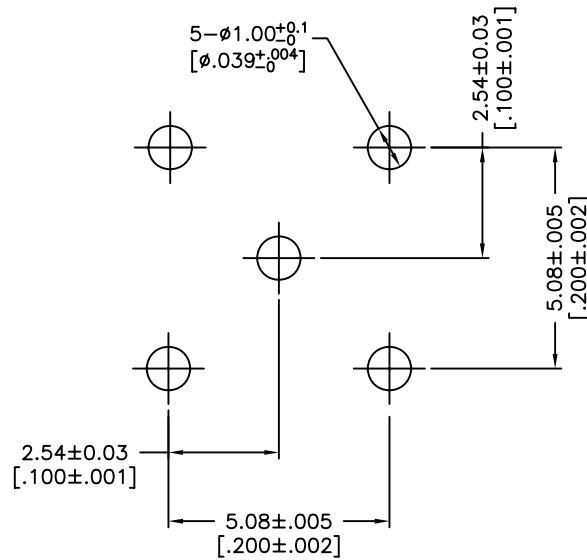
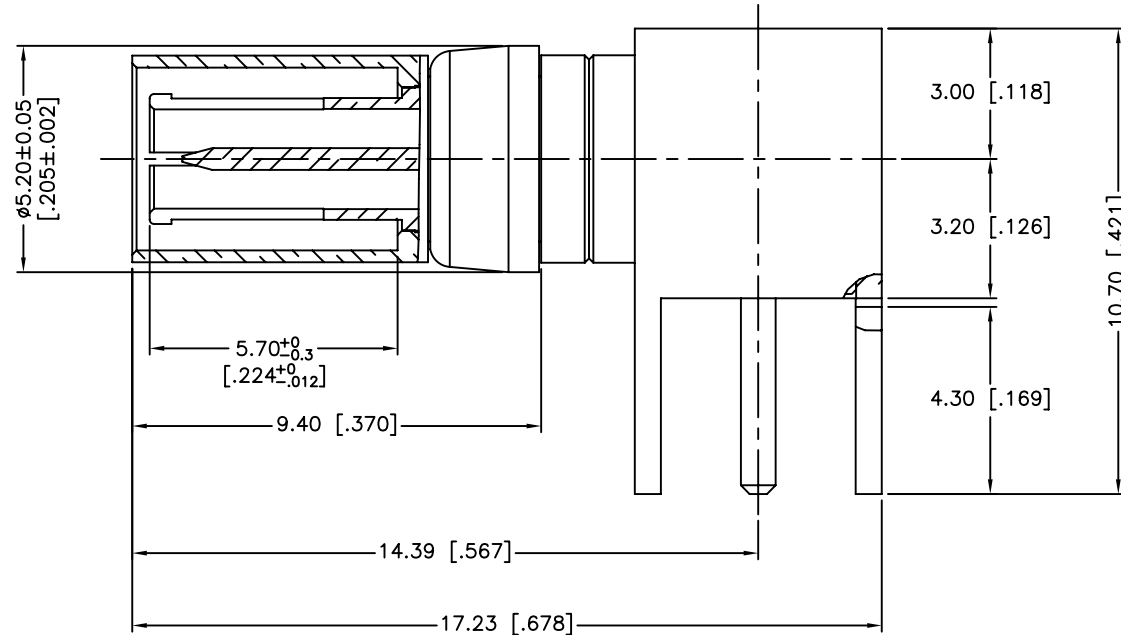


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/13/11	XXXXXX	INITIAL RELEASE

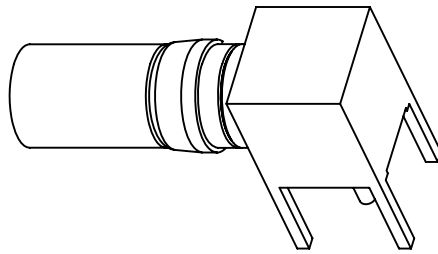

RECOMMENDED
MOUNTING HOLE

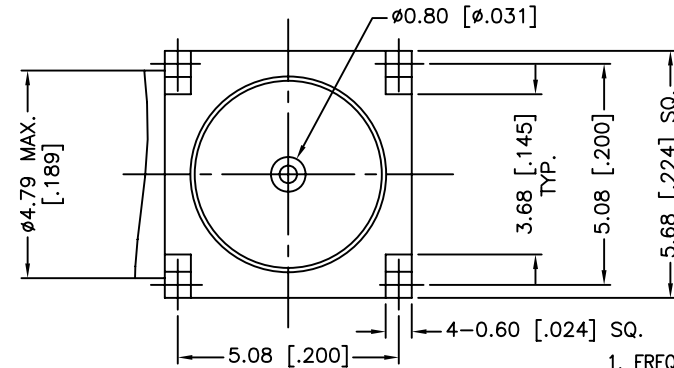

1. FREQUENCY RANGE: DC 0-4 GHz
2. VSWR(RETURN LOSS): 1.10, MAX.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.					APPROVALS		DATE	Amphenol Connex			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm					DRAWN		05/13/11				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"					CHECKED			PART DESCRIPTION			
DO NOT SCALE DRAWING					ISSUED						
					SHEET		1 OF 1	PART NO.			
					CAD FILE		C:/CONNEX/282116-75.DWG				
6	HOUSING	BRASS	GOLD	1				1.0/2.3 R/A PCB PLUG (75 ohm)			
5	INSULATOR	PTFE	NATURAL	1							
4	RETAINER RING	BER. COPPER	BRIGHT TIN	1				282116-75			
3	CONTACT PIN	BRASS	GOLD	1							
2	OUT CONTACT	BER. COPPER	GOLD	1				DWG. NO. 282116-75.DWG			
1	BODY	BRASS	GOLD	1							
								REV.	NC	SIZE	A
								SCALE	NA		