
































Features

- · Global certificates
- Universal AC input / Full range
- 2 pole USA plug, Class II power unit
- No load power consumption < 0.075W
- · Energy efficiency Level VI
- Comply with EISA 2007/DoE and NRCan
- · Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Pass LPS
- -30~+70°C wide range working temperature
- LED indicator for power on
- · Various DC plug quick adapter accessory available (Plug kit sold sperately, please refer to : https://www.meanwell.com/upload/pdf/DC_plug.pdf)
- 3 years warranty

Description

GST18U is a highly reliable, 18W wall-mounted style single-output green adaptor series. This product is a class II power unit (no FG), equipped with a 2-Pin standard USA AC power plug, adopting the input range from 85 VAC to 264 VAC. The entire series supplies different models with output voltages ranging between 5VDC and 48VDC that can satisfy the demands for various types of consumer electronic devices. With the efficiency up to 89% and the extremely low no-load power consumption below 0.075W, GST18U is compliant with USA EISA 2007/DoE and Canada NRCan. The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case, providing the double insulation that effectively prevents electrical shock. GST18U is certified for the international safety regulations.

■ Model Encoding

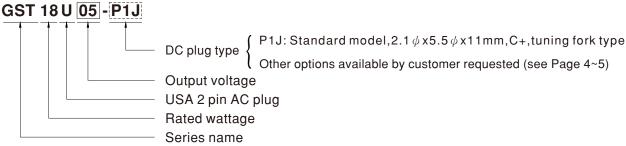

Applications

- · Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipments

GTIN CODE


MW Search: https://www.meanwell.com/serviceGTIN.aspx



SPECIFICATION

ORDER NO.		GST18U05-P1J	GST18U07-P1J	GST18U09-P1	GST18U12-P1J	GST18U15-P1J	GST18U18-P1J	GST18U24-P1J	GST18U28-P1J	GST18U48-P1J	
	SAFETY MODEL NO.	GST18U05	GST18U07	GST18U09	GST18U12	GST18U15	GST18U18	GST18U24	GST18U28	GST18U48	
OUTPUT	DC VOLTAGE Note.2		7.5V	9V	12V	15V	18V	24V	28V	48V	
	RATED CURRENT	3.0A	2.0A	2.0A	1.50A	1.20A	1.0A	0.75A	0.64A	0.375A	
	CURRENT RANGE	0 ~ 3.0A	0 ~ 2.0A	0 ~2.0A	0 ~ 1.50A	0 ~ 1.20A	0 ~ 1.0A	0 ~ 0.75A	0 ~ 0.64A	0 ~ 0.375A	
	RATED POWER (max.)	15W	15W	18W	18W	18W	18W	18W	18W	18W	
	RIPPLE & NOISE (max.) Note.3	-	80mVp-p	80mVp-p	80mVp-p	100mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	
	VOLTAGE TOLERANCE Note.4		±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%	
		±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
		±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%	
	SETUP, RISE, HOLD UP TIME				ns, 30ms, 15ms						
		7 85 ~ 264VAC									
	FREQUENCY RANGE	47 ~ 63Hz									
	EFFICIENCY (Typ.)	81%	85%	85%	86%	87%	88%	88%	88.5%	89%	
INPUT	AC CURRENT	0.5A / 115VAC	0.3A/23	BOVAC						ı	
	INRUSH CURRENT (max.)	Cold start 35A / 115VAC 65A / 230VAC									
	LEAKAGE CURRENT(max.)	0.25mA / 240VAC									
PROTECTION	OVER OAR	110 ~ 150% rated output power									
	OVERLOAD	Protection type: Hiccup mode, recovers automatically after fault condition is removed									
	OVER VOLTAGE	110 ~ 140% rated output voltage									
	OVER VOLTAGE	Protection type: Clamp by zener diode, output short									
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	20% ~ 90% RH non-condensing									
	STORAGE TEMP., HUMIDITY										
	TEMP. COEFFICIENT	±0.03% / °C (0~50°C)									
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes									
	SAFETY STANDARDS	UL62368-1, CSA C22.2 No.62368-1, BSMI CNS15598-1, EAC TP TC 004 approved									
	WITHSTAND VOLTAGE	I/P-O/P:4242VDC									
SAFETY &	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH									
EMC (Note. 8)		Parameter		Stand	Standard		Test Le	Test Level / Note			
	EMC EMISSION	Conducted 6	emission		PART 15 / CISPF 5936, EAC TP T		3) Class B	lass B			
		Radiated em	nission	FCC PART 15 / CISPR22, CAN ICES-3(B)/NMB-3(B) Class CNS15936, EAC TP TC 020						ass B	
	MTBF	3879.7K hrs min. Telcordia SR-332 (Bellcore) ; 668.4K hrs min. MIL-HDBK-217F (25°C)									
OTHERS	DIMENSION	79*54*33mm (L*W*H)									
	PACKING	198g; 60pcs/12.9Kg/1.15CUFT									
CONNECTOR	PLUG	See page 4~5; Other type available by customer requested									
JUMEVION	CABLE See page 4~5; Other type available by customer requested										
NOTE	 1.All parameters are specified at 115VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1 μF & 47 μF capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 10% to 100% rated load. 7.Derating may be needed under low input voltage. Please check the derating curve for more details. 8.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf) ※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx 										




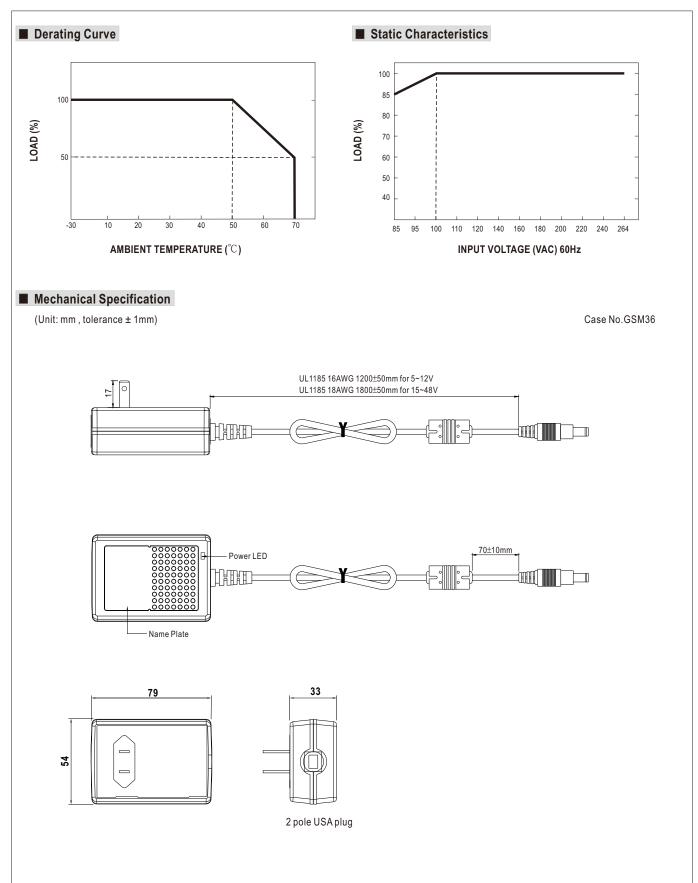



■ DC output plug

O Standard plug: P1J

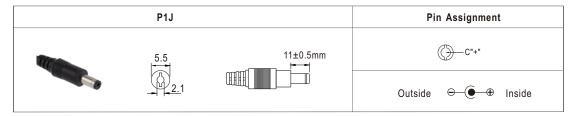

O DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
- (2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide: https://www.meanwell.com/upload/pdf/DC_plug.pdf

Example quick adapter accessory:



Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style			Type No.	Α	В	С	Quick Adapter	
			турстчо.	OD	ID	L	Accessory	
	A B	(Straight) (Right-angled)	P1I	5.5	2.1	9.5		
			P1L	5.5	2.5	9.5		
A			P1M	5.5	2.5	11.0	Available	
			P1IR	5.5	2.1	9.5	(Current rating: 7.5A max.)	
			P1JR	5.5	2.1	11.0	(Current fatting, 7.5A max.)	
			P1LR	5.5	2.5	9.5		
			P1MR	5.5	2.5	11.0		
Barrel Style			Type No.	Α	В	С		
				OD	ID	L		
	A B	(Straight) (Right-angled)	P2I	5.5	2.1	9.5		
			P2J	5.5	2.1	11.0		
			P2L	5.5	2.5	9.5	None	
A O			P2M	5.5	2.5	11.0	None	
			P2IR	5.5	2.1	9.5		
			P2JR	5.5	2.1	11.0		
			P2LR	5.5	2.5	9.5		
			P2MR	5.5	2.5	11.0		
Lock Style			Type No.	Α	В	С		
			Type No.	OD	ID	L		
, A	A	Floating Locking C SWITCHCRAFT original or equivalent	P2S(S761K)	5.53	2.03	12.06	None	
			P2K(761K)	5.53	2.54	12.06	NOTIC	
			P2C(S760K)	5.53	2.03	9.52		
			P2D(760K)	5.53	2.54	9.52		



Min. Pin Style	Type No.	A			C	Quick Adapter	
	DOA	OD	ID		L	Accessory	
A GRAND	P3A	2.35 4.0	1.7		11.0	Available (Current rating: 5A max.)	
B LATER DE LA CONTROL DE LA CO	P3B P3C						
EIAJ equivalent	P30	4.75			11.0		
Center Pin Style	Type No.	A OD	B ID	C	D Center Pin		
LA, LC	P4A	5.5	3.4	11.0	1.0	Available	
	P4B	6.5	4.4	11.0	1.4	(Current rating: 7.5A max.)	
EIAJ equivalent	P4C	7.4	5.1	11.0	0.6		
	Type No	Pin Assignment					
Min. DIN 3 Pin with Lock (male)	Type No.	PIN No. Output					
	R6B	1		+Vo		Available	
		2		-Vo)	(Current rating: 7.5A max.)	
KYCON KPPX-3P equivalent		3		+Vo)		
Min DIN A Din with Lock (well)	Typo No	Pin Assignment					
Min. DIN 4 Pin with Lock (male)	Type No.	PIN No).	Output		Available (Current rating: 7.5A max.)	
	R7B	1		+Vo			
		2		-Vo			
KYCON KPPX-4P equivalent		3		-Vo			
		4 +Vo					
Min. DIN 4 Pin with Lock (female)	Type No.	Pin Assignment PIN No. Output					
	R7BF	1				None	
		2		-Vo			
2 3 14 14 1011111		3		-Vo			
KYCON KPJX-CM-4S equivalent		4	+Vo				
DIN 5 Pin (male)	Type No.	Pin Assignment					
Dily 31 iii (iiiaie)	турстто.	PIN No. Output					
		1		-Vo		Available (Current rating: 7.5A max.)	
	R1B	3		-Vo +Vo -Vo			
	KID	4					
_		5		-vo +Vo			
	_	-	Pin Assignment				
Stripped and tinned leads	Type No.	PIN No. Output					
L (red) 1 2 L1 (black)	by customer st	1		+V ₀		None	
Length of Land L1 by request (MW's standard length, L: 25 mm, L1: 5 mm) (NOTE: The wire color is for reference only, please refer to the actual product)		2		-Vo			

■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html