



TS79L00 Series

3-Terminal 100mA Negative Voltage Regulator

TO-92

SOT-89

Pin Definition:

1. Ground
2. Input
3. Output

SOP-8

Pin Definition:

- | | |
|-----------|-----------|
| 1. Output | 8. N/C |
| 2. Input | 7. Input |
| 3. Input | 6. Input |
| 4. N/C | 5. Ground |

General Description

The TS79L00 Series of negative voltage regulators are inexpensive, easy-to-use devices suitable for a multitude of applications that require a regulated supply of up to 100mA. Like their higher power TS7900 and TS79M00 Series cousins, these regulators feature internal current limiting and thermal shutdown making them remarkably rugged. No external components are required with the TS79L00 devices in many applications.

These devices offer a substantial performance advantage over the traditional zener diode-resistor combination, as output impedance and quiescent current are substantially reduced.

Features

- Output Voltage Range -5V, -9V, -12V
- Output current up to 100mA
- Internal thermal overload protection
- Internal short-circuit current limiting
- Output transistor safe-area compensation
- Output voltage offered in 4% tolerance


Ordering Information

Part No.	Package	Packing
TS79LxxCT B0	TO-92	1Kpcs / Bulk
TS79LxxCT A3	TO-92	2Kpcs / Ammo
TS79LxxCY RM	SOT-89	1Kpcs / 7" Reel
TS79LxxCS RL	SOP-8	2.5Kpcs / 13" Reel

Note: Where **xx** denote voltage option

05=-5V, **09**=-9V, **12**=-12V

Standard Application Circuit

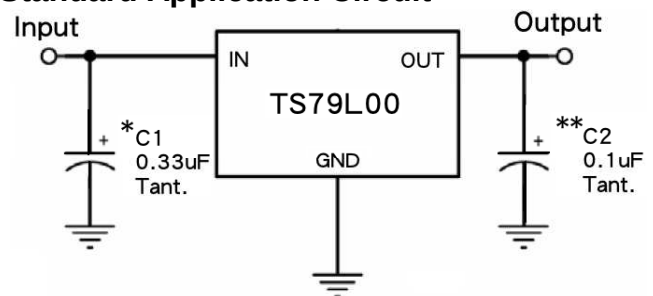

A common ground is required between the input and the output voltages. The input voltage must remain typically 2.0V above the output voltage even during the low point on the input ripple voltage.

XX = these two digits of the type number indicate voltage.

* = Cin is required if regulator is located an appreciable distance from power supply filter.

** = Co is not needed for stability; however, it does improve transient response.

Absolute Maximum Rating (Ta = 25°C unless otherwise noted)

Parameter		Symbol	Limit	Unit
Input Voltage		V_{IN}	-35	V
Power Dissipation		P_D	Internal Limited	W
Operating Temperature range		T_{OPR}	0~+125	°C
Junction Temperature		T_J	+150	°C
Storage Temperature Range		T_{STG}	-65~+150	°C
Thermal Resistance - Junction to Case	TO-92	$R\theta_{JC}$	--	°C/W
	SOT-89		18	
	SOP-8		20	
Thermal Resistance - Junction to Ambient	TO-92	$R\theta_{JA}$	210	°C/W
	SOT-89		--	
	SOP-8		60*	

Note: * Considering 6cm² of copper board heat-sink

TS79L05 Electrical Characteristics

($V_{in} = -10V$, $I_{out} = 40mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{in} = 0.33\mu F$, $C_{out} = 0.1\mu F$; unless otherwise specified.)

Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
Output voltage	V_{out}	$T_j = 25^{\circ}C$		-4.80	-5	-5.20	V
		$-7.5V \leq V_{in} \leq -20V$, $5mA \leq I_{out} \leq 100mA$		-4.75	-5	-5.25	
Line Regulation	REG _{line}	$T_j = 25^{\circ}C$	$-7.5V \leq V_{in} \leq -20V$	--	50	150	mV
Load Regulation	REG _{load}	$T_j = 25^{\circ}C$	$5mA \leq I_{out} \leq 100mA$	--	20	60	
			$5mA \leq I_{out} \leq 40mA$	--	10	30	
Quiescent Current	I_q	$I_{out} = 0$, $T_j = 25^{\circ}C$		--	3	6	mA
Quiescent Current Change	ΔI_q	$-7.5V \leq V_{in} \leq -25V$		--	--	1.5	
		$5mA \leq I_{out} \leq 40mA$		--	--	0.1	
Output Noise Voltage	V_n	$10Hz \leq f \leq 100KHz$, $T_j = 25^{\circ}C$		--	40	--	μV
Ripple Rejection Ratio	RR	$f = 120Hz$, $-8V \leq V_{in} \leq -18V$		41	49	--	dB
Voltage Drop	V_{drop}	$I_{out} = 100mA$, $T_j = 25^{\circ}C$		--	1.7	--	V
Peak Output Current	$I_{o\ peak}$	$T_j = 25^{\circ}C$		--	0.15	--	A
Temperature Coefficient of Output Voltage	$\Delta V_{out} / \Delta T_j$	$I_{out} = 5mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$		--	-0.65	--	$mV/^{\circ}C$

TS79L09 Electrical Characteristics

($V_{in} = -15V$, $I_{out} = 40mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{in} = 0.33\mu F$, $C_{out} = 0.1\mu F$; unless otherwise specified.)

Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
Output voltage	V_{out}	$T_j = 25^{\circ}C$		-8.65	-9	-9.36	V
		$-11.5V \leq V_{in} \leq -24V$, $5mA \leq I_{out} \leq 100mA$		-8.57	-9	-9.45	
Line Regulation	REG _{line}	$T_j = 25^{\circ}C$	$-11.5V \leq V_{in} \leq -24V$	--	90	180	mV
Load Regulation	REG _{load}	$T_j = 25^{\circ}C$	$5mA \leq I_{out} \leq 100mA$	--	30	90	
			$5mA \leq I_{out} \leq 40mA$	--	15	45	
Quiescent Current	I_q	$I_{out} = 0$, $T_j = 25^{\circ}C$		--	3	6	mA
Quiescent Current Change	ΔI_q	$-11V \leq V_{in} \leq -23V$		--	--	1.5	
		$5mA \leq I_{out} \leq 40mA$		--	--	0.1	
Output Noise Voltage	V_n	$10Hz \leq f \leq 100KHz$, $T_j = 25^{\circ}C$		--	60	--	μV
Ripple Rejection Ratio	RR	$f = 120Hz$, $-13V \leq V_{in} \leq -24V$		37	57	--	dB
Voltage Drop	V_{drop}	$I_{out} = 100mA$, $T_j = 25^{\circ}C$		--	1.7	--	V
Peak Output Current	$I_{o\ peak}$	$T_j = 25^{\circ}C$		--	0.15	--	A
Temperature Coefficient of Output Voltage	$\Delta V_{out} / \Delta T_j$	$I_{out} = 5mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$		--	-0.9	--	$mV/^{\circ}C$

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS79L00 Series

3-Terminal 100mA Negative Voltage Regulator

TS79L12 Electrical Characteristics

$V_{in} = -19V$, $I_{out} = 40mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{in} = 0.33\mu F$, $C_{out} = 0.1\mu F$; unless otherwise specified.)


Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
Output voltage	V_{out}	$T_j = 25^{\circ}C$		-11.53	-12	-12.48	V
		$-14.5V \leq V_{in} \leq -27V$, $5mA \leq I_{out} \leq 100mA$		-11.42	-12	-12.60	
Line Regulation	REGline	$T_j = 25^{\circ}C$	$-14.5V \leq V_{in} \leq -27V$	--	120	240	mV
Load Regulation	REGload	$T_j = 25^{\circ}C$	$5mA \leq I_{out} \leq 100mA$	--	40	120	
			$5mA \leq I_{out} \leq 40mA$	--	20	60	
Quiescent Current	I_q	$I_{out} = 0$, $T_j = 25^{\circ}C$		--	3	6.5	mA
Quiescent Current Change	ΔI_q	$-16V \leq V_{in} \leq -27V$		--	--	1.5	
		$5mA \leq I_{out} \leq 40mA$		--	--	0.1	
Output Noise Voltage	V_n	$10Hz \leq f \leq 100KHz$, $T_j = 25^{\circ}C$		--	80	--	μV
Ripple Rejection Ratio	RR	$f = 120Hz$, $-11V \leq V_{in} \leq -23V$		37	42	--	dB
Voltage Drop	V_{drop}	$I_{out} = 100mA$, $T_j = 25^{\circ}C$		--	1.7	--	V
Peak Output Current	$I_{o peak}$	$T_j = 25^{\circ}C$		--	0.15	--	A
Temperature Coefficient of Output Voltage	$\Delta V_{out} / \Delta T_j$	$I_{out} = 5mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$		--	-1.0	--	$mV/^{\circ}C$

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS79L00 Series


3-Terminal 100mA Negative Voltage Regulator

TO-92 Mechanical Drawing

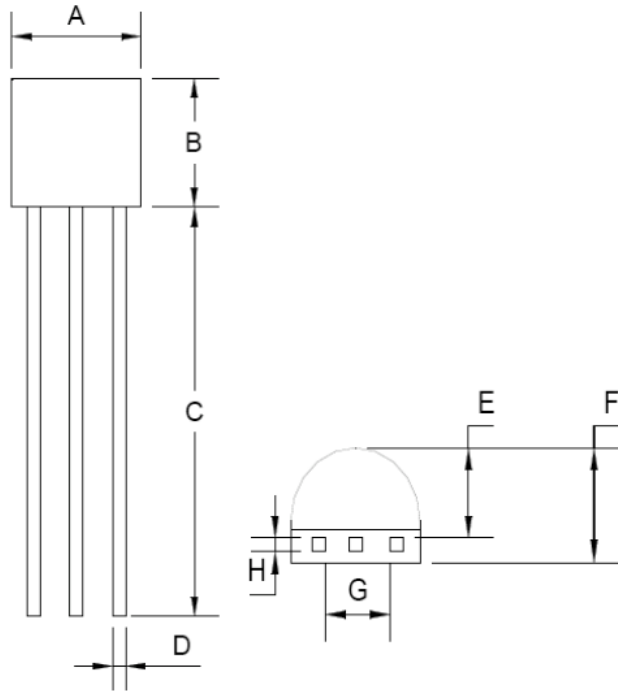


DIM	TO-92 DIMENSION			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.30	4.70	0.169	0.185
B	4.30	4.70	0.169	0.185
C	14.30(typ)		0.563(typ)	
D	0.43	0.49	0.017	0.019
E	2.19	2.81	0.086	0.111
F	3.30	3.70	0.130	0.146
G	2.42	2.66	0.095	0.105
H	0.37	0.43	0.015	0.017

Marking Diagram

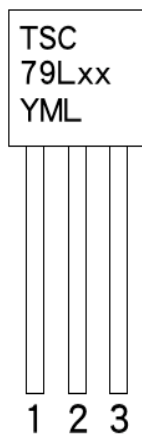


- XX** = Output Voltage
(**05**=-5V, **09**=-9V, **12**=-12V)
- Y** = Year Code
- M** = Month Code
(**A**=Jan, **B**=Feb, **C**=Mar, **D**=Apr, **E**=May, **F**=Jun, **G**=Jul, **H**=Aug, **I**=Sep, **J**=Oct, **K**=Nov, **L**=Dec)
- L** = Lot Code

SOT-89 Mechanical Drawing

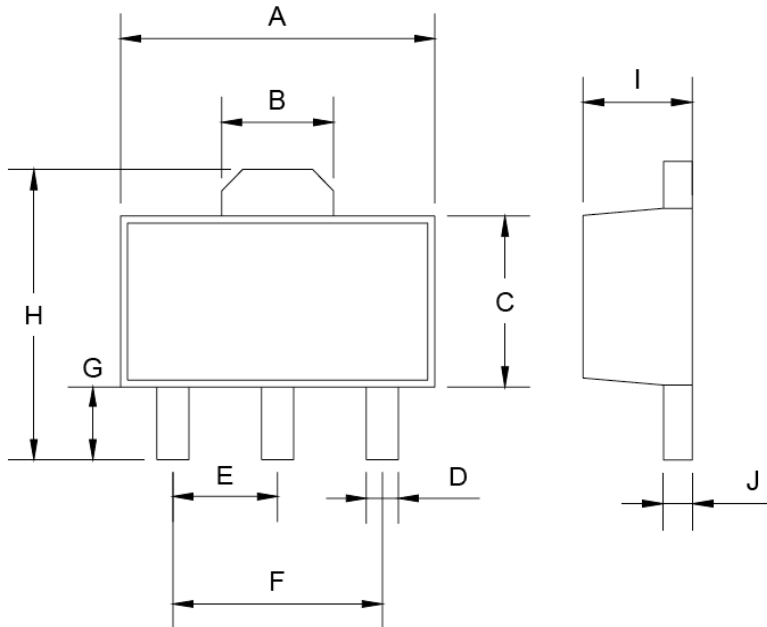

SOT-89 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.40	4.60	0.173	0.181
B	1.50	1.7	0.059	0.070
C	2.30	2.60	0.090	0.102
D	0.40	0.52	0.016	0.020
E	1.50	1.50	0.059	0.059
F	3.00	3.00	0.118	0.118
G	0.89	1.20	0.035	0.047
H	4.05	4.25	0.159	0.167
I	1.4	1.6	0.055	0.068
J	0.35	0.44	0.014	0.017

Marking Diagram




- XX** = Output Voltage
(**05**=-5V, **09**=-9V, **12**=-12V)
- Y** = Year Code
- M** = Month Code
(**A**=Jan, **B**=Feb, **C**=Mar, **D**=Apr, **E**=May, **F**=Jun, **G**=Jul, **H**=Aug, **I**=Sep, **J**=Oct, **K**=Nov, **L**=Dec)
- L** = Lot Code

TS79L00 Series


3-Terminal 100mA Negative Voltage Regulator

SOP-8 Mechanical Drawing

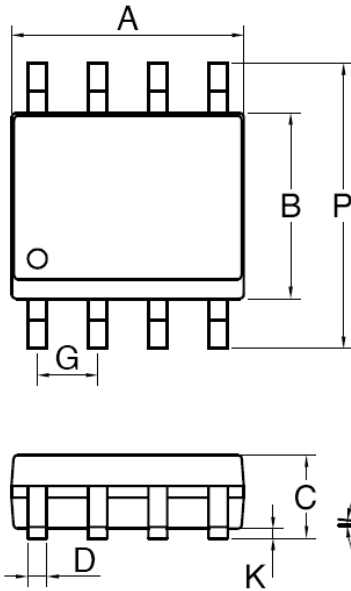

SOP-8 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX.
A	4.80	5.00	0.189	0.196
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27BSC		0.05BSC	
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

Marking Diagram



- XX** = Output Voltage
(**05**=-5V, **09**=-9V, **12**=-12V)
- Y** = Year Code
- M** = Month Code
(**A**=Jan, **B**=Feb, **C**=Mar, **D**=Apr, **E**=May, **F**=Jun, **G**=Jul, **H**=Aug, **I**=Sep, **J**=Oct, **K**=Nov, **L**=Dec)
- L** = Lot Code

TS79L00 Series

3-Terminal 100mA Negative Voltage Regulator

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.