

**BeStar Technologies Inc.**

Address: 761 N. 17th Street Unit 4, St. Charles, IL 60174

Tel : 847-261-2850 E-mail : sales@bestartech.com Web : www.bestartech.com

Document Number : 0009-91  
Revision : A4  
Total Pages : 4  
Prepare by : Holmes, Poon  
Date : 16 November, 2011

**SoniCrest** Brand Acoustic Components[www.jlsonicrest.com](http://www.jlsonicrest.com)

Document Type : Specification  
Product Type : Electro-magnetic Sound Generator Component  
Part Number : HC0903E

A2 - update layout and format by Leo, Sin on 11 Feb., 2004		
A3 - updated RoHS version by Leo, Sin on 17 Nov., 2005		
A4 - Updated section 4 by Holmes, Poon on 16 Nov., 2011		

This material is the property of BeStar Technologies Inc.  
Unauthorized copying or use of this material is prohibited.

## 1. Purpose and Scope

This document contains both general requirements, qualification requirements, and those specific electrical, mechanical requirements for this part.

## 2. Description

Ø9mm electro-magnetic sound generator, RoHS compliant.

## 3. Application

Telecommunication Equipment, Computers and Peripherals, Portable Equipment, Automobile Electronics, POS System, etc.


## 4. Component Requirement

### 4.1 General Requirement

- |   |                  |
|---|------------------|
| <b>4.1.1.</b> Operating Temperature Range | : -20°C to +60°C |
| <b>4.1.2.</b> Storage Temperature Range   | : -30°C to +70°C |
| <b>4.1.3.</b> Weight                      | : Approx. 1g     |

### 4.2 Electrical Requirement

- |  |                     |
|--|---------------------|
| <b>4.2.1.</b> Rated Voltage  | : 3V                |
| <b>4.2.2.</b> Operating Voltage  | : 2 ~ 5 V           |
| <b>4.2.3.</b> Rated Current  | : ≤80mA             |
| <b>4.2.4.</b> Coil Resistance  | : $25 \pm 4 \Omega$ |
| <b>4.2.5.</b> Coil Impedance   | : 40Ω               |
| <b>4.2.6.</b> Sound Pressure Level at 10cm<br>(Applying rated voltage and rated frequency) | : ≥82dB             |
| <b>4.2.7.</b> Rated Frequency  | : 2731Hz            |

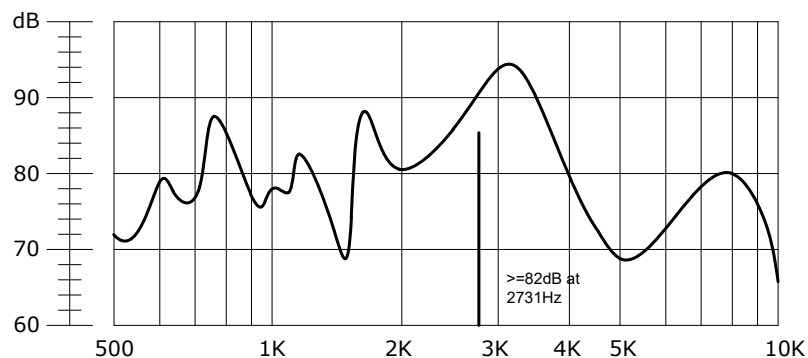


**Figure 1. Frequency Response**

### 4.3 Mechanical Requirement

- |                                    |                           |
|------------------------------------|---------------------------|
| <b>4.3.1.</b> Layout and Dimension | : See Section 7, Figure 3 |
|------------------------------------|---------------------------|

#### 4.4 Test Setup

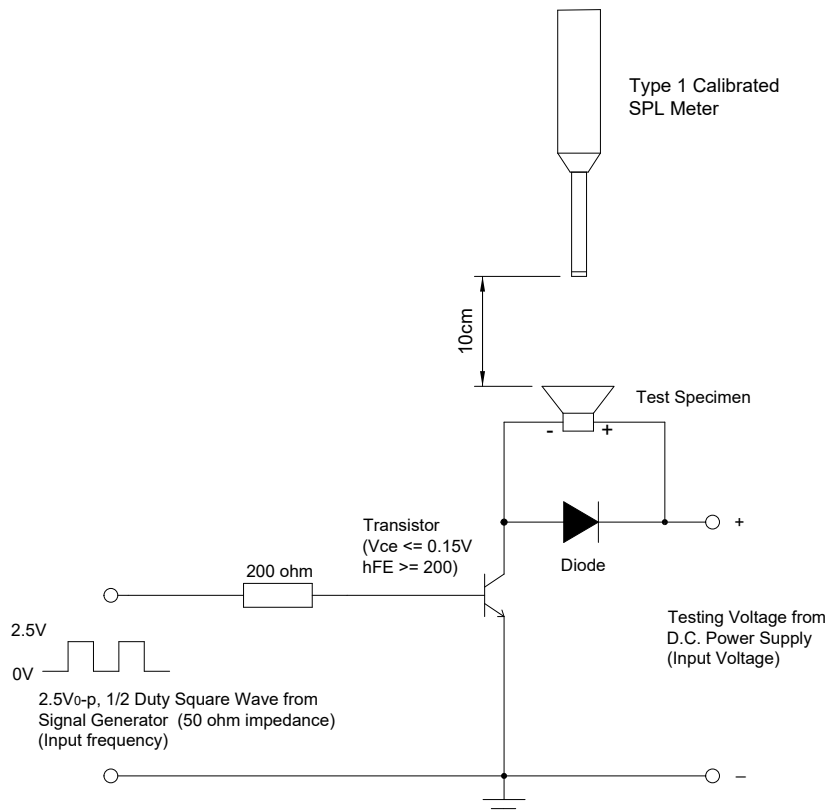

**Figure 2. Test Setup**

**Notes :** Apply 2.5V<sub>0-p</sub> from Signal Generator, set 2731Hz from Signal Generator. Measure SPL using a calibrated SPL meter 10cm from the sound port. Sound level meter to be in accordance with IEC651 (1979) Type 1 and/or ANSI S1.4-1983. The meter must be checked on a daily basis using a calibrated acoustic calibrator recommended by the manufacturer. Measurement should be carried out in a free field environment or at least 40cm from any surface.

## 5. Reliability Test

- 5.1. Operating Life** : Subject samples to room condition for 96 hours under rated voltage and rated frequency. Components must be fully stabilized at temperature extremes before data is taken, which may require up to a 2 hours soak.
- 5.2. High Temperature** : Subject samples to  $+60 \pm 2$  °C and operate for 96 hours. Components must be fully stabilized at temperature extremes before data is taken, which may require up to a 2 hours soak.
- 5.3. Low Temperature** : Subject samples to  $-20 \pm 2$  °C and operate for 96 hours. Components must be fully stabilized at temperature extremes before data is taken, which may require up to a 2 hours soak.
- 5.4. Static Humidity** : Precondition at room temperature for 1 hour. Then expose to  $+40$ °C with 90 ~ 95% relative humidity for 96 hours. Finally dry at room ambient for 2 hours before taking final measurement.


## 6. Recommended Soldering Profile

- 6.1. Soldering Method** : Manual Soldering
- 6.2. Temperature** : 315°C
- 6.3. Duration** :  $\leq 3$  seconds

## 7. Mechanical Layout

Unit : mm

Tolerance : Linear      XX.X      =  $\pm 0.3$   
                                  XX.XX     =  $\pm 0.05$   
                          Angular        =  $\pm 0.25^\circ$   
 (unless otherwise specified)

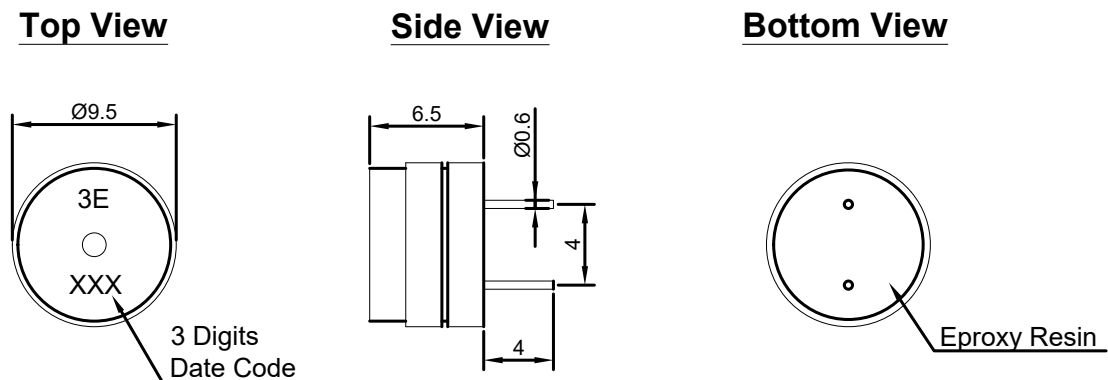

**Figure 3. HC0903E Mechanical Layout**