Gas Discharge Tubes Datasheet


SL1021A/B Series

Gas Discharge Tubes






Additional Information



Agency Approvals

Agency	Agency File Number
91	E128662

3 Electrode GDT Graphical Symbol



Description

GDT circuit protection devices dissipate electrical surge energy safely within a contained plasma gas. Commonly used to help protect sensitive telecom and networking equipment and lines, GDTs protect from damage that may result from lightning strikes and equipment switching operations.

The Littelfuse GDT series described in this document are available in a variety of leaded and surface mount forms and offered with and without optional fail-safe clip. Please refer to the electrical specifications, dimension and packaging options section of this document for additional information.

SL1021A/B Series:

SL1021A/B series GDTs are designed to offer high levels of performance on fast rising transients in the range of 100V/µS to 1KV/µS, which are those most likely created by induced lightning disturbances.

These devices feature ultra low capacitance (typically 1.5pF or less) and are extremely robust with SL1021A devices able to divert a 10,000 Amp pulse without destruction, and SL1021B suffix devices able to divert a 20,000 Amp pulse without destruction.

These series offer optimized internal geometry which provide low insertion loss at high frequencies, ideal for the protection of broadband and other high speed transmission equipment.

Features

- RoHS compliant
- Low insertion loss
- Excellent response to fast rising transients
- Ultra low capacitance
- 10KA (A suffix devices) / 20KA (B suffix devices) surge capability tested with 8/20µs pulse as defined by IEC 61000-4-5

Applications

SL1021:

- Broadband equipment
- ADSL equipment
- XDSL equipment
- Satellite and CATV equipment
- Splitters

General telecom equipment

Available with thermal failsafe option (add 'F' suffix to part

- Telecom network interfaces
- Telephone line cards
- Repeaters

number)

- Modems
- Line test equipment



Gas Discharge Tubes Datasheet

SL1021A/B Series Gas Discharge Tubes

Product Characteristics

Materials	Dull Tin Plate 17.5 \pm 12.5 Microns. with ceramic insulator
Product Marking	'LF' mark, voltage& date code: SL1021A - Red /White text SL1021B - Blue /White text
Glow to arc transition current	~ 1Amp
Glow Voltage	~60-200 Volts
Storage and Operation Temperature	-40 to +90°C
Transverse Voltage (Delay Time)	< 0.2µSec (Tested to ITU-T Rec. K.12)
Arc Voltage	~10 to 35 Volts
Holdover Voltage	<150mS (Tested to ITU-T Rec. K.12)

Electrical Characteristics

Device Specifications (at 25°C)						Life Ratings																																	
Part Number	DC Voltage 100V/Sec.		DC Voltage	DC Voltage	Capaci- tance	Insulation Resistance	AC Current 50Hz 1Sec.	Surge Current 8/20µSec	Max Single Surge	Max Single Surge	Surge Life 10/1000																												
	MIN	ТҮР	MAX	100 V/µSec.	1kV/µSec.	(@1Mhz)	MIN	x10 ¹	x10 ¹	8/20µSec¹	10/350µSec¹	μSecx300¹																											
SL1021B075	60	75	90		650		>10 ¹⁰ Ω				4kA ²																												
SL1021A090 SL1021B090	72	90	108	500			(at 50V)				5kA ³																												
SL1021A145 SL1021B145	116	145	174																																				
SL1021A150 SL1021B150	120	150	180			600																																	
SL1021A200	150	200	250																																				
SL1021A230 SL1021B230	184	230	276	450	650 700 850 900	650	650	650																															
SL1021A250 SL1021B250	200	250	300	500					000	000	050	050	050	050																									
SL1021A260 SL1021B260	210	260	310	550		<1.5pF		10Amps	10kA ² 20kA ³	15kA ² 25kA ³		200Amps																											
SL1021A300 SL1021B300	240	300	360	650				>10 ¹⁰ Ω (at 100V)		2010 1	2010 (2.5kA ² 5kA ³																											
SL1021A350 SL1021B350	280	350	420	700				0																															
SL1021A400 SL1021B400	320	400	480	850	050	050	050	050	950	050	050	050	050	050	050	050	050	050	050	050	050	050	050	050	050	050	050	050	050	050	950	850 950							
SL1021A420 SL1021B420	345	420	500		950																																		
SL1021A450 SL1021B450	360	450	540	900	1000																																		
SL1021A500 SL1021B500	400	500	600	950	1100																																		
SL1021A600	480	600	720	1000	1200																																		

Notes:

1. Total current through centre electrode, tested in accordance with ITU-T Rec K.12


2. SL1021A series

3. SL1021B series




SL1021A/B Series Gas Discharge Tubes






Voltage vs. Time Characteristic




Soldering Parameters - Reflow Soldering (Surface Mount Devices)

Reflow Cond	Pb – Free assembly		
Pre Heat	- Temperature Min (T _{s(min)})	150°C	
	- Temperature Max (T _{s(max)})	200°C	
	-Time (Min to Max) (t _s)	60 - 180 secs	
Average ram peak	np up rate (Liquidus Temp (T _L) to	3°C/second max	
$T_{S(max)}$ to T_L -	5°C/second max		
Reflow	- Temperature (T _L) (Liquidus)	217°C	
	- Temperature (t _L)	60 - 150 seconds	
Peak Temper	rature (T _P)	260 ^{+0/-5} °C	
Time within	5°C of actual peak Temperature (t_p)	10 – 30 seconds	
Ramp-down	Rate	6°C/second max	
Time 25°C to	o peak Temperature (T _P)	8 minutes Max.	
Do not exce	ed	260°C	



Soldering Parameters - Hand Soldering Solder Iron Temperature: 350° C +/- 5°C Heating Time: 5 seconds max.

Soldering Parameters - Wave Soldering (Thru-Hole Devices)



Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100° C
Temperature Maximum:	150° C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	280° C Maximum
Solder Dwell Time:	2-5 seconds

Note: Surge Arrestors with a Failsafe mechanism should be individually examined after soldering




Downloaded from Arrow.com.

Gas Discharge Tubes Datasheet


Device Dimensions

Note: Failsafe option dimensions shown in green.







Core Devices:




Straight Radial Leaded Devices:







Straight "T" Leaded Devices:






Part Numbering System and Ordering Information


<u>SL102x x xxx x</u>	<u>x</u>
Series SL1021 SL1024	
Surge Capability A = 10kA B = 20kA	
Breakdown Voltage —	
090 = 90V 300 = 300V 145 = 145V 350 = 350V 150 = 150V 400 = 400V 200 = 200V 420 = 420V 230 = 230V 450 = 450V 250 = 250V 500 = 500V 260 = 260V 600 = 600V	
Configuration Code (See Device Dimensions section) C Y R X P	


Option Code

Blank = No failsafe F or G = With Failsafe




Packaging





For 'SL1021A/B' device type X packing

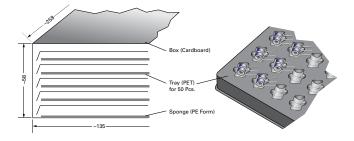

Device Type	Description	Quantity
Type C	100pcs/tray x 5 trays per carton	500
Type R	100pcs/tray x 5 trays per carton	500
Type P	100pcs/tray x 5 trays per carton	500
Type Y	100pcs/tray x 5 trays per carton	500
Туре Х	50pcs/tray x 5 trays per carton	250

* Please contact the factory for further packaging information.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.



Downloaded from Arrow.com.