

2SB1197A

PNP Low Vce(sat) Transistor

Voltage	-50V	Current	-3A
----------------	-------------	----------------	------------

Features


- Silicon PNP epitaxial type
- Low Vce(sat) -0.5V(max)@Ic/Ib= -2A/-200mA
- High collector current capability
- Excellent DC current gain characteristics
- Lead free in compliance with EU RoHS 2011/65/EU directive.
- Green molding compound as per IEC61249 Std. (Halogen Free)

Mechanical Data

- Case: SOT-23 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.0084 grams

SOT-23

Unit: inch(mm)

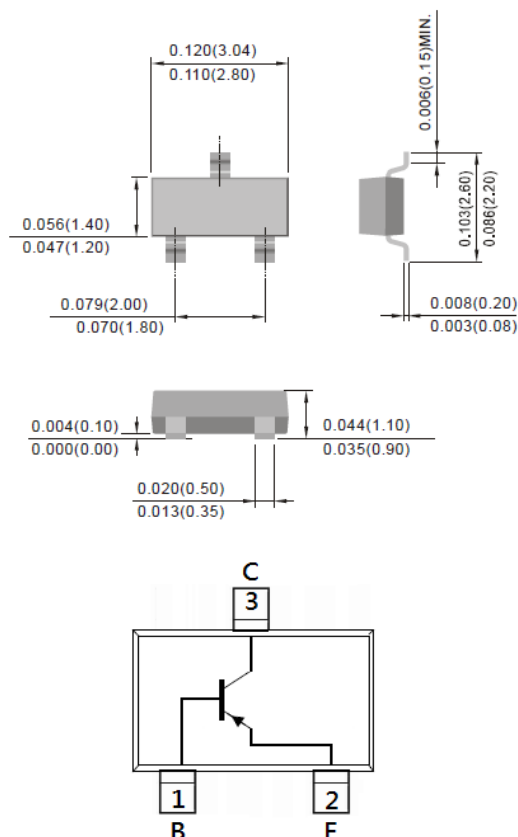

Maximum Ratings and Thermal Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Collector-Base Voltage	V _{CBO}	-50	V
Collector-Emitter Voltage	V _{CEO}	-50	V
Emitter-Base Voltage	V _{EBO}	-7	V
Collector Current (DC)	I _C	-3	A
Collector Current (Pulse)	I _{CP}	-3.5	A
Collector Power Dissipation	P _D	1.25	W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55~150	°C
Typical Thermal Resistance from Junction to Ambient ^(Note)	R _{θJA}	100	°C/W

Note: Mounted on FR4 with 2oz. PCB at 1 inch square copper pad.



2SB1197A

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
OFF Characteristics						
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C = -10\text{mA}$, $I_B = 0\text{A}$	-50	-	-	V
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C = -0.1\text{mA}$, $I_E = 0\text{A}$	-50	-	-	V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E = -0.1\text{mA}$, $I_C = 0\text{A}$	-7	-9.7	-	V
Collector-Base Cutoff Current	I_{CBO}	$V_{CB} = -30\text{V}$, $I_E = 0\text{A}$	-	-1	-100	nA
Emitter-Base Cutoff Current	I_{EBO}	$V_{EB} = -4\text{V}$	-	-1	-100	nA
Collector-Emitter Cutoff Current	I_{CES}	$V_{CES} = -30\text{V}$	-	-1	-100	nA
ON characteristics						
DC Current Gain	h_{FE}	$V_{CE} = -2\text{V}$, $I_C = -1\text{mA}$	100	-	-	-
		$V_{CE} = -2\text{V}$, $I_C = -0.5\text{A}$	100	165	300	
		$V_{CE} = -2\text{V}$, $I_C = -1\text{A}$	100	-	-	
		$V_{CE} = -2\text{V}$, $I_C = -2\text{A}$	50	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = -0.5\text{A}$, $I_B = -50\text{mA}$	-	-67	-150	mV
		$I_C = -1\text{A}$, $I_B = -100\text{mA}$	-	-112	-200	
		$I_C = -2\text{A}$, $I_B = -200\text{mA}$	-	-203	-500	
Base-Emitter Saturation voltage	$V_{BE(SAT)}$	$I_C = -1\text{A}$, $I_B = -100\text{mA}$	-	-0.88	-1.1	V
Base-Emitter Turn-on voltage	$V_{BE(on)}$	$I_C = -1\text{A}$, $V_{CE} = -2\text{V}$	-	-0.77	-1.1	
Transition Frequency	f_T	$I_C = -100\text{mA}$, $V_{CE} = -5\text{V}$ $f = 100\text{MHz}$	-	180	-	MHz
Collector Output Capacitance	C_{OB}	$V_{CB} = -10\text{V}$, $I_E = 0\text{A}$, $f = 1\text{MHz}$	-	20	-	pF

2SB1197A

TYPICAL CHARACTERISTIC CURVES

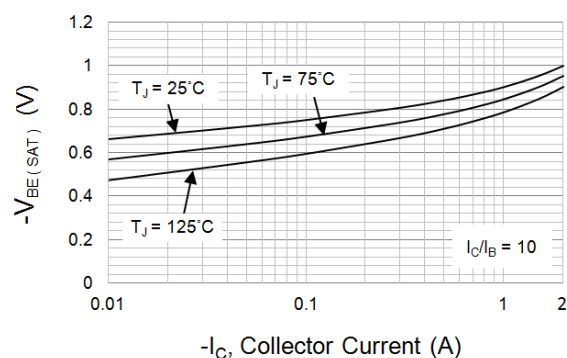


Fig.1 Typical Base-Emitter Saturation Voltage

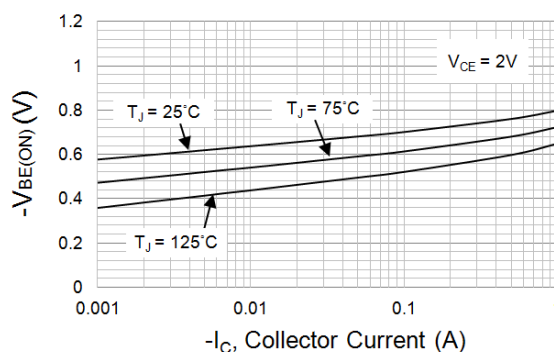


Fig.2 Typical Base-Emitter Turn-on Voltage

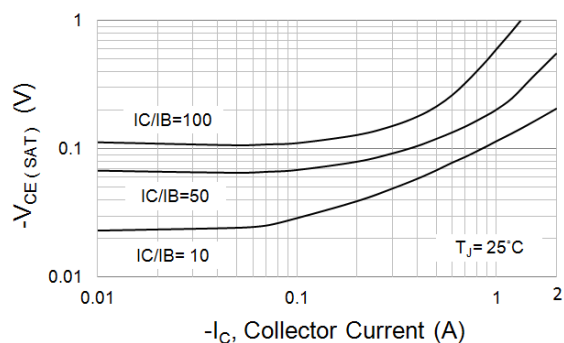


Fig.3 Typical Collector-Emitter Saturation

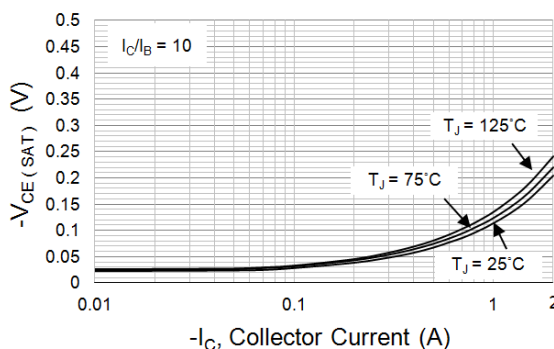


Fig.4 Typical Collector-Emitter Saturation

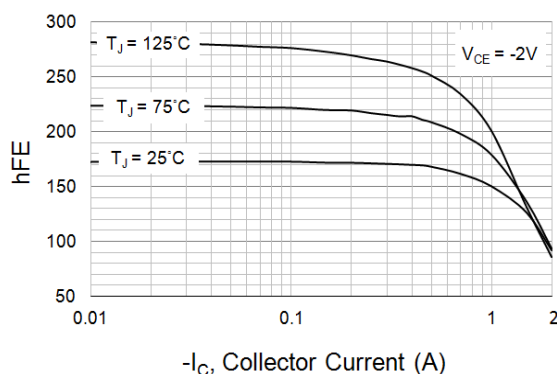


Fig.5 Typical DC Current Gain vs. Collector Current

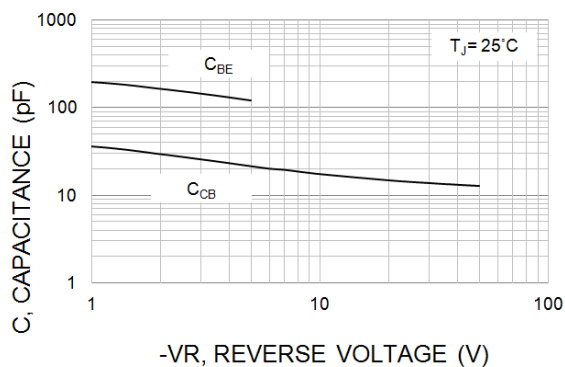



Fig.6 Typical Capacitance

2SB1197A

PART NO PACKING CODE VERSION

Part No Packing Code	Package Type	Packing Type	Marking	Version
2SB1197A_R1_00001	SOT-23	3K pcs / 7" reel	B97	Halogen free
2SB1197A_R2_00001	SOT-23	12K pcs / 13" reel	B97	Halogen free

MOUNTING PAD LAYOUT

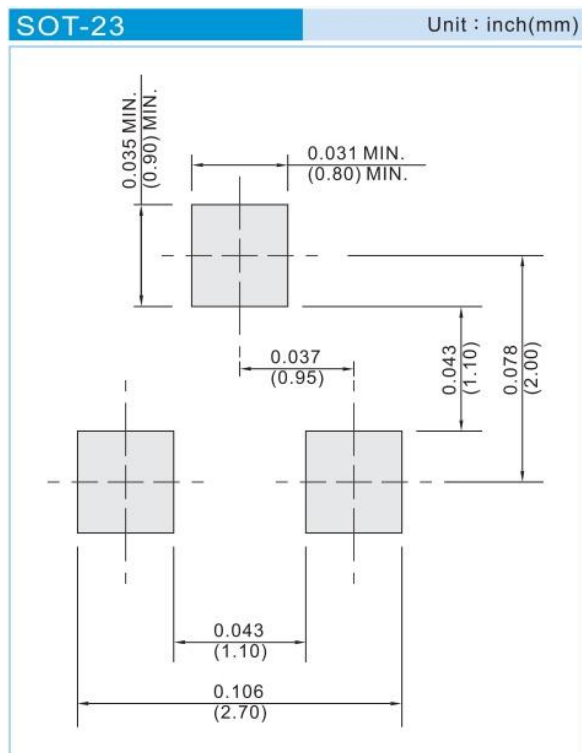



2SB1197A

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.