
Power Metal Strip® Shunt Resistor, Low TCR (Down to < ± 10 ppm/°C), Very Low Value (Down to 15 µΩ)

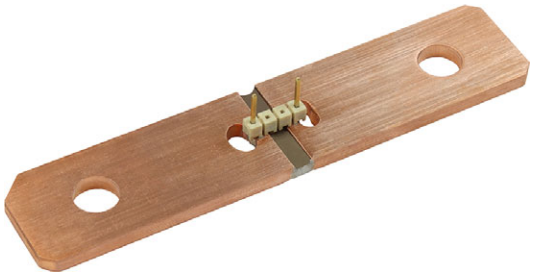

LINKS TO ADDITIONAL RESOURCES

3D Models | Infographics | Reference Designs

FEATURES

- High power capability that enables current sensing to 1825 A
- Proprietary processing technique produces extremely low resistance values
- All welded construction
- Solid metal nickel-chrome alloy resistive element with unique design for low TCR (down to ± 10 ppm/°C)
- Very low inductance (< 5 nH)
- Low thermal EMF (as low as < 1.25 µV/°C)
- AEC-Q200 qualified
- PATENT(S): www.vishay.com/patents
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free RoHS COMPLIANT HALOGEN FREE GREEN (5-2008)

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	SIZE	POWER RATING $P_{70\,°C}$ W	TOLERANCE ± %	RESISTANCE VALUE RANGE Ω	RESISTANCE VALUES CURRENTLY AVAILABLE (1) Ω	WEIGHT (typical) g
WSBE8518	8518	36	5	30µ to 100µ	50µ, 100µ	36
WSBE8536	8536	50	5	15µ to 50µ	50µ	72

Note

(1) Other values may be available, contact factory

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	RESISTOR CHARACTERISTICS	
		WSBE8518	WSBE8536
Temperature coefficient (-20 °C to +150 °C)	ppm/°C	± 10 for all R values	
Operating temperature range	°C	-65 to +170	
Thermal EMF	µV/°C	< 1.25	
Inductance	nH	< 5	
Maximum current rating	A	$(P/R)^{1/2}$	

GLOBAL PART NUMBER INFORMATION

GLOBAL PART NUMBERING: WSBE8518L1000JTA2 (WSBE8518…A2, 0.0001 Ω, ± 5 %, tray pack)

W	S	B	E	8	5	1	8	L	1	0	0	0	J	T	A	2	

GLOBAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING CODE	SPECIAL	PLATING OPTIONS
WSBE8518 **WSBE8536**	**L** = mΩ **L1000** = 0.0001 Ω	**J** = ± 5 %	**K** = bulk pack **T** = tray pack	Blank = no pins **A2** / **A3** = 2 / 3 pins **B2** / **B3** = 2 / 3 shrouded header pins	Blank = unplated **P** = tin plated

PATENT(S): www.vishay.com/patents


This Vishay product is protected by one or more United States and international patents.

For technical questions, contact: ww2cresistors@vishay.com


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000


Downloaded from Arrow.com.

DIMENSIONS in inches (millimeters)

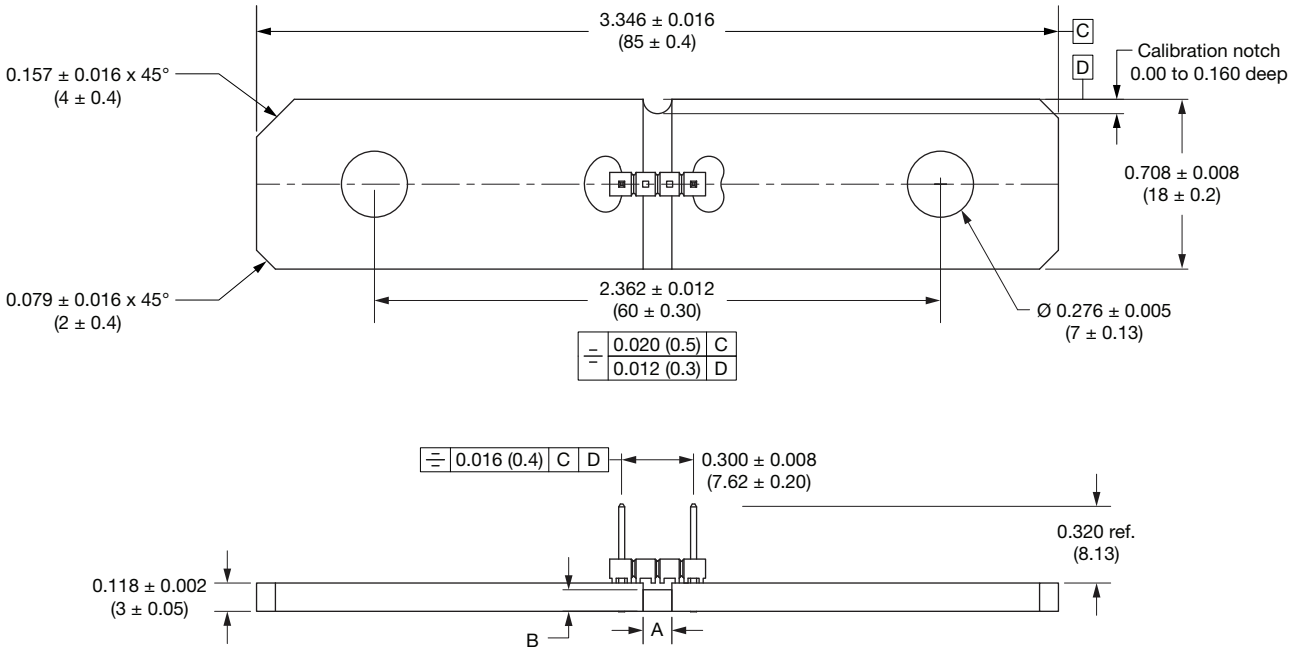

WSBE8518L1000JTA2

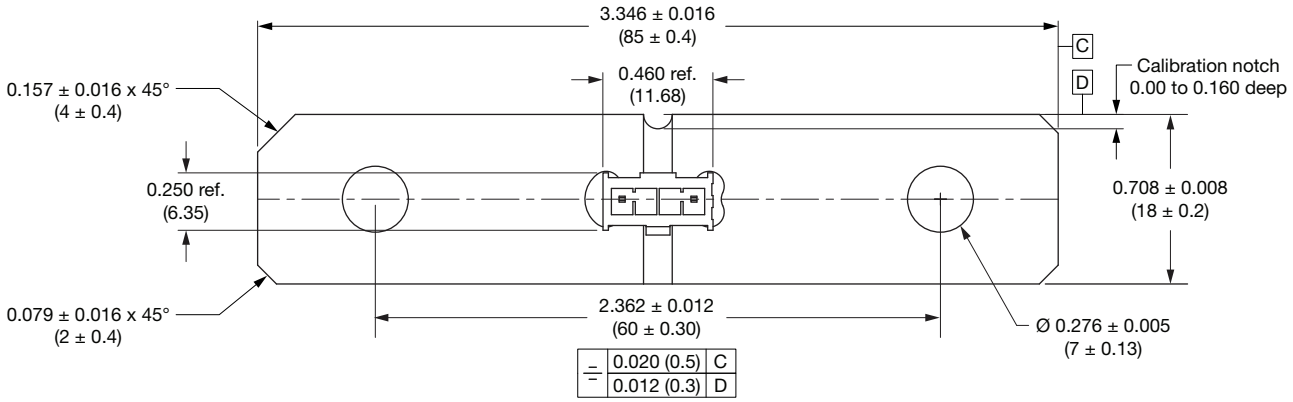

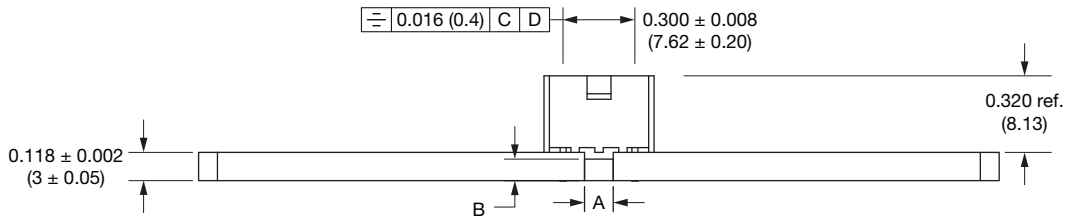


WSBE8518L1000JTB2P


For technical questions, contact: ww2cresistors@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

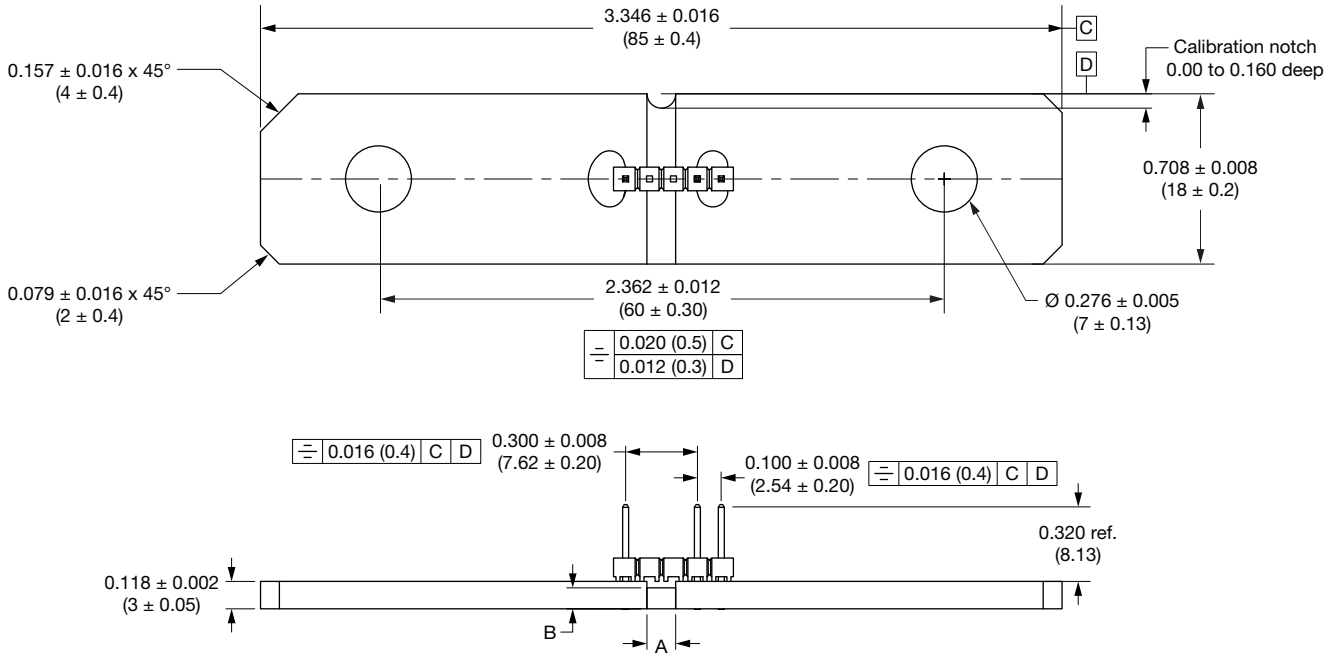

WSBE8518L1000JTA3

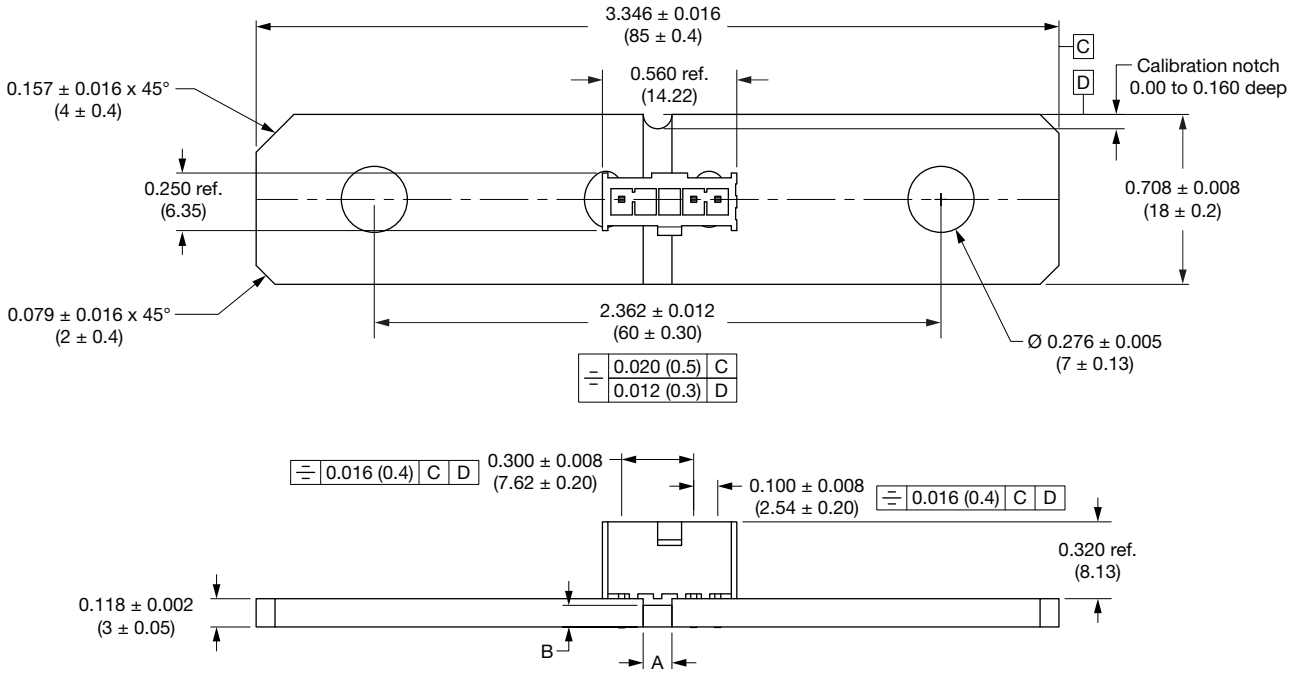


WSBE8518L1000JTB3P


For technical questions, contact: ww2cresistors@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

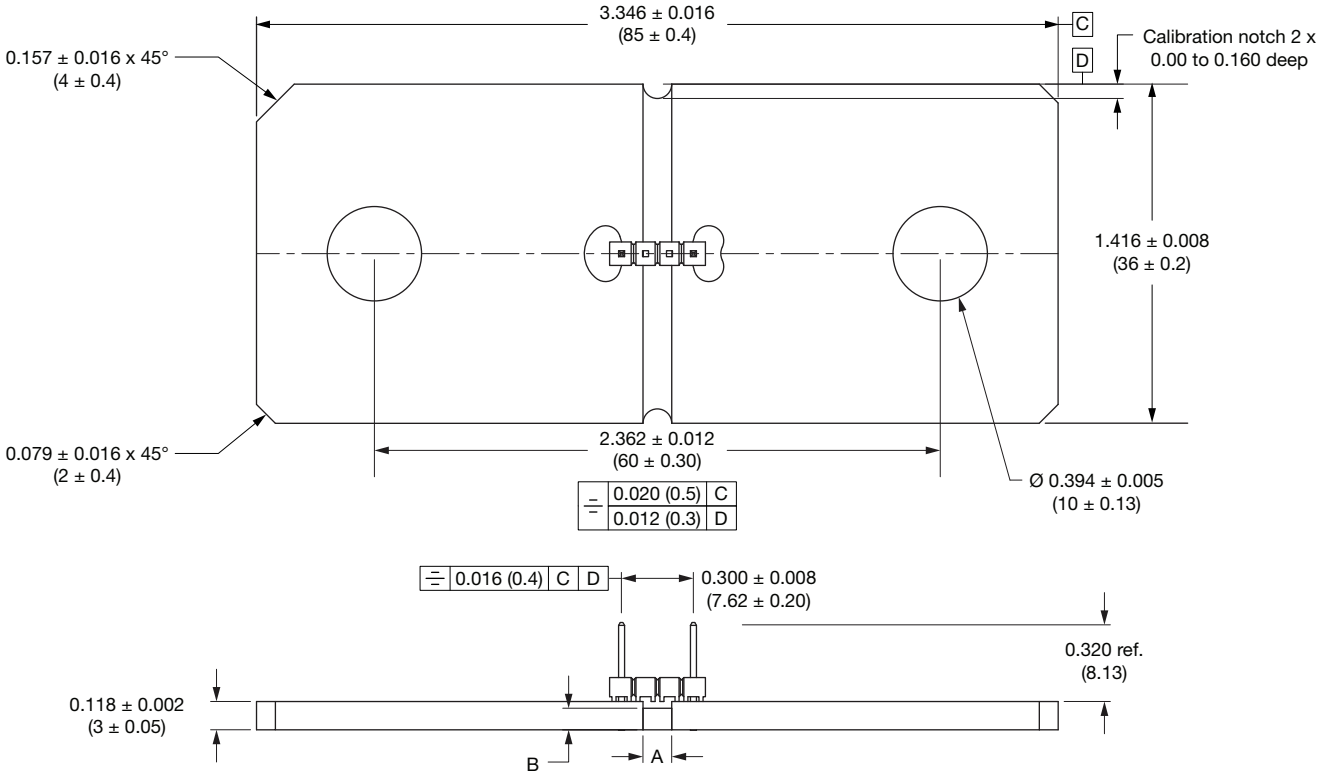


WSBE8536L0500JTA2

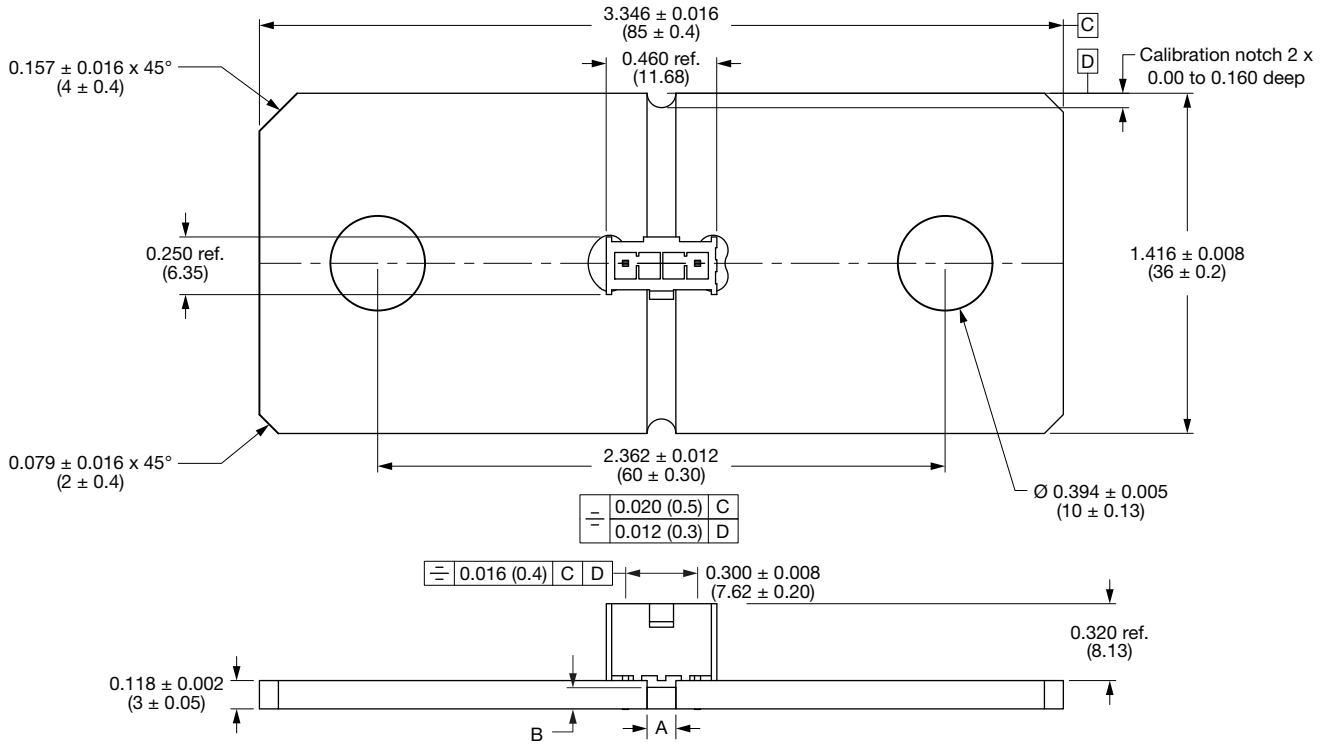


WSBE8536L0500JTB2

For technical questions, contact: ww2cresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

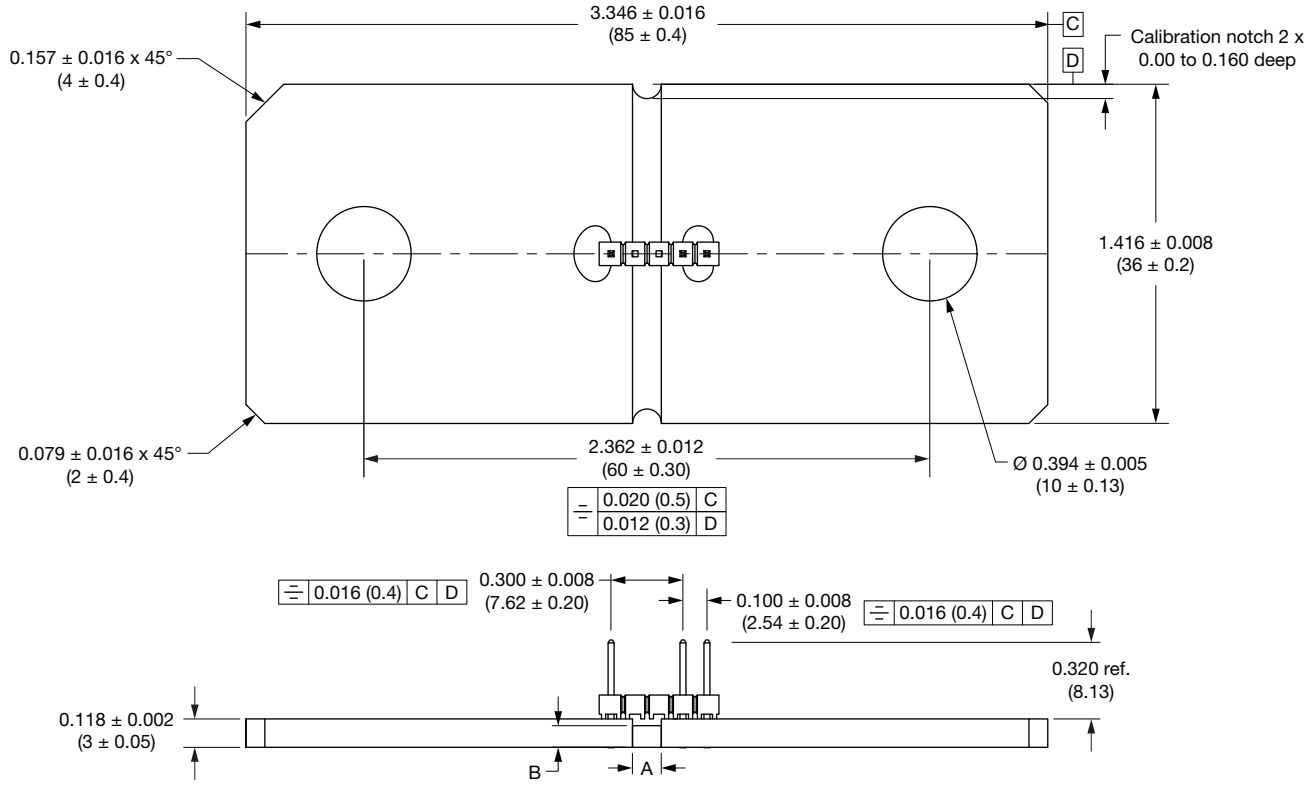

WSBE8536L0500JTA3

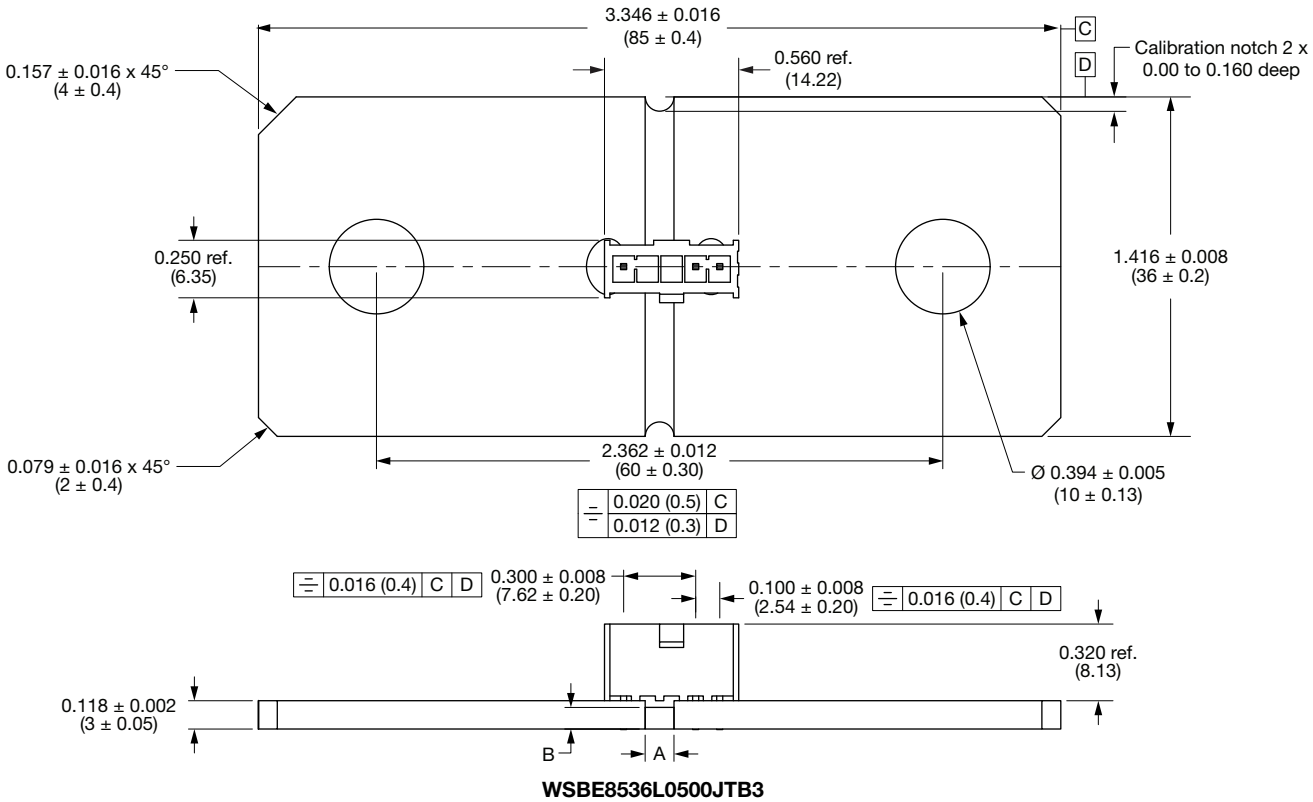

WSBE8536L0500JTB3


For technical questions, contact: ww2cresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

CONNECTION OPTIONS




Voltage sense pins in position 1 and 4,
position 2 and 3 are blank.

A Series




Voltage sense pins in position 1 and 4,
position 2 and 3 are blank.

B Series



Voltage sense pins in position 1 and 4,
ground pin in position 5,
position 2 and 3 are blank.

A3 Series




Voltage sense pins in position 1 and 4,
ground pin in position 5,
position 2 and 3 are blank.

B3 Series

Notes

- Connection options are examples. Other configurations available upon request (links to external website)
  - A series connector - modified with the middle two pins removed
  - B series connector - modified with the middle two pins removed
  - B series female connector
  - Connector specifications datasheet
- Reference Designs | Vishay - click for the landing page of all Vishay provided reference designs
- High Voltage Intelligent Battery Shunt Sensor - (HV-IBSS-CANFD) Reference Design - click for a BMS reference design using CANBUS communication protocol

DERATING

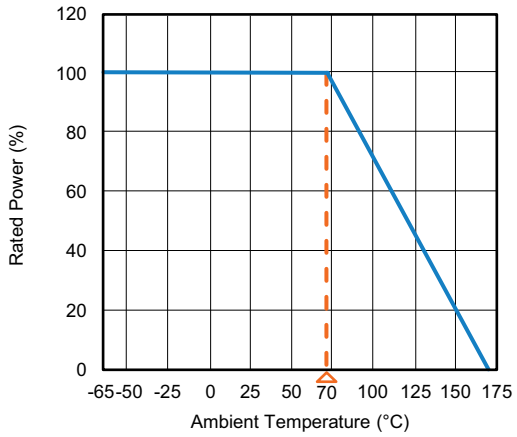

SIZE	RESISTANCE VALUE (μΩ)	ELEMENT MATERIAL	A REF.	B REF.
8518	100	NiCr	0.120 (3.05)	0.090 (2.29)
8518	50	CuMn	0.160 (4.06)	0.050 (1.27)
8536	50	NiCr	0.120 (3.05)	0.090 (2.29)

TOLERANCES ON DECIMALS
.xxx ± 0.005 [.x ± 0.1]


UNLESS OTHERWISE LISTED

For technical questions, contact: ww2cresistors@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

TCR COMPARISON

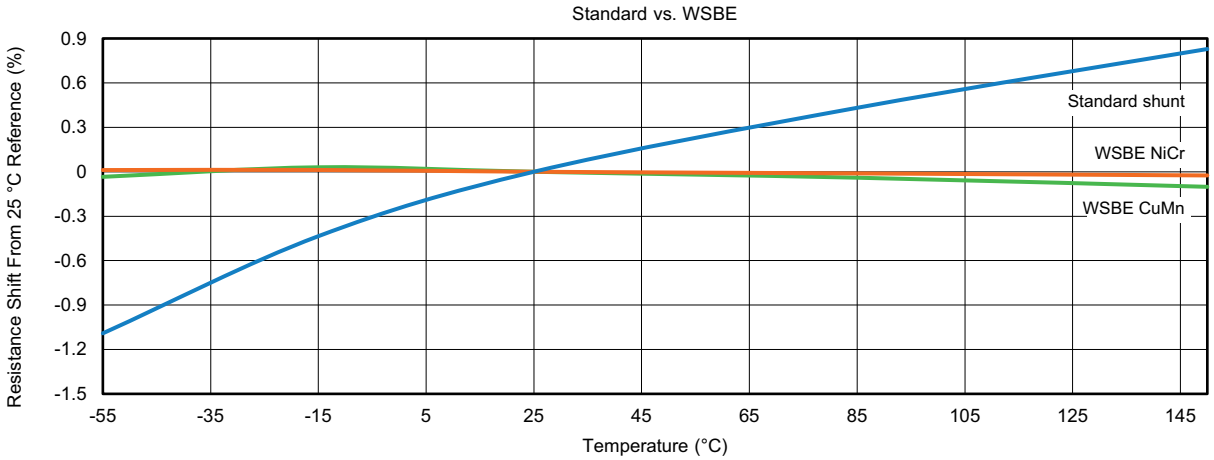

Note

- www.vishay.com/doc?30405 - click for more information on TCR and the way it affects your application

PERFORMANCE		
TEST	**CONDITIONS OF TEST**	**TEST LIMITS**
Thermal shock	-55 °C to +150 °C, 1000 cycles, 15 min at each extreme	± 0.5 % Δ*R*
Short time overload	5 x rated power for 5 s	± 0.5 % Δ*R*
Low temperature storage	-65 °C for 24 h	± 0.2 % Δ*R*
High temperature exposure	1000 h at +170 °C	± 1.0 % Δ*R*
Bias humidity	+85 °C, 85 % RH, 10 % bias, 1000 h	± 0.5 % Δ*R*
Mechanical shock	100 *g*'s for 6 ms, 5 pulses	± 0.2 % Δ*R*
Vibration	Frequency varied 10 Hz to 2000 Hz in 1 min, 3 directions, 12 h	± 0.2 % Δ*R*
Load life	1000 h at +70 °C, 1.5 h "ON", 0.5 h "OFF"	± 1.0 % Δ*R*
Moisture resistance	MIL-STD-202, method 106, 0 % power, 7b not required	± 0.2 % Δ*R*

LINKS TO RELATED DOCUMENTS	
TECHNICAL NOTES	
The Benefit of Using a Three Sense Pin Design on Battery / Meter Shunt Resistors	www.vishay.com/doc?30381
WHITE PAPERS	
Temperature Coefficient of Resistance for Current Sensing	www.vishay.com/doc?30405
REFERENCE DESIGNS	
HV-IBSS-CANFD	www.vishay.com/doc?15003

For technical questions, contact: ww2cresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2026 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.