


SC3035B-1

800.0 MHz Differential Sine-Wave Clock



SMC-8 Case

- Quartz SAW Frequency Stability
- Fundamental Fixed Frequency
- Very Low Jitter and Power Consumption
- Rugged, Miniature, Surface-Mount Case
- Low-Voltage Power Supply (3.3 VDC)

This digital clock is designed for use with high-speed timing systems. Fundamental-mode oscillation is made possible by surface-acoustic-wave (SAW) technology. The design results in low jitter, compact size, and low power consumption. Differential outputs provide a sine wave that is capable of driving 50 Ω loads.

Absolute Maximum Ratings

Rating	Value	Units
Power Supply Voltage (V_{CC} at Terminal 1)	0 to +4.0	VDC
Input Voltage (ENABLE at Terminal 8)	0 to +4.0	VDC
Case Temperature (Powered or Storage)	-40 to +85	$^{\circ}\text{C}$

Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Output Frequency	Absolute Frequency	1, 2	799.800		800.200	MHz
	Tolerance from 800.000 MHz				± 250	ppm
Q and $\bar{Q}$ Output	Voltage into 50 Ω (VSWR ≤ 1.2)	1, 3	0.60	.85		V_{P-P}
	Operating Load VSWR				2:1	
	Symmetry	3, 4, 5	49		51	%
	Harmonic Spurious	3, 4, 6		-25	-20	dBc
	Nonharmonic Spurious				-60	
Q and $\bar{Q}$ Period Jitter	No Noise on V_{CC}	3, 4, 6, 7		15	30	ps $_{P-P}$
	200 mV $_{P-P}$ from 1 MHz to 1/2 f_O on	3, 4, 7, 8			35	ps $_{P-P}$
Output (Disabled)	Amplitude into 50 Ω	3, 9			75	mV $_{P-P}$
Output DC Resistance (between Q & $\bar{Q}$)		3	50			K Ω
ENABLE (Terminal 14)	Input HIGH Voltage	3, 9	$V_{CC}-0.1$	V_{CC}	$V_{CC}+0.1$	V
	Input LOW Voltage		0.0		0.20	V
	Input HIGH Current			3	5	mA
	Input LOW Current				-1	mA
	Propagation Delay				1	ms
DC Power Supply	Operating Voltage	1, 3	+3.13	+3.30	+3.47	VDC
	Operating Current			20	40	mA
Operating Ambient Temperature	T_A	1, 3	0		+70	$^{\circ}\text{C}$
Lid Symbolization (YY = Year, WW = Week)	RFM SC3035B-1 800.00 MHz YYWW					




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:

- Unless otherwise noted, all specifications include any combination of load VSWR, V_{CC} , and T_A . In addition, Q and $\bar{Q}$ are terminated into 50 Ω loads to ground. (See: Typical Test Circuit.)
- One or more of the following United States patents apply: 4,616,197; 4,670,681; 4,760,352.
- The design, manufacturing process, and specifications of this device are subject to change without notice.
- Only under the nominal conditions of 50 Ω load impedance with VSWR ≤ 1.2 and nominal power supply voltage.
- Symmetry is defined as the pulse width (in percent of total period) measured at the 50% points of Q or $\bar{Q}$. (See: Timing Definitions.)
- Jitter and other spurious outputs induced by externally generated electrical noise on V_{CC} or mechanical vibration are not included. Dedicated external voltage regulation and careful PCB layout are recommended for optimum performance.
- Applies to period jitter of Q and $\bar{Q}$. Measurements are made with the Tektronix CSA803 signal analyzer with at least 1000 samples.
- Period jitter measured with a 200 mV $_{P-P}$ sine wave swept from 1 MHz to one-half of f_O at the V_{CC} power supply terminal.
- The outputs are enabled when Terminal 8 is at logic HIGH. Propagation delay is defined as the time from the 50% point on the rising edge of ENABLE to the 90% point on the rising edge of the output amplitude or as the fall time from the 50% point to the 10% point. (SEE: Timing Definitions.)
- The start up time is defined as the time from when power is applied to terminals 1 and 8 (90% of 3.3V) until power out from Q and $\bar{Q}$ reaches 90% of Q_{out} level.

Electrical Connections


Terminal Number	Connection
1	V _{CC}
2	Ground
3	NC or Ground
4	Q Output
5	$\bar{Q}$ Output
6	Ground
7	
8	ENABLE
LID	Ground



Case Design

All pads consist of 30 microinches (min) electroless gold on 50 microinches (min) electroless nickel over base metal. The metallic center pad was designed for mechanical support. Grounding of this pad is optional.

Lid symbolization, including terminal 1 locator dot, are in contrasting ink. Symbolization varies by model number. For purposes of illustration, only terminal 1 dot is shown.

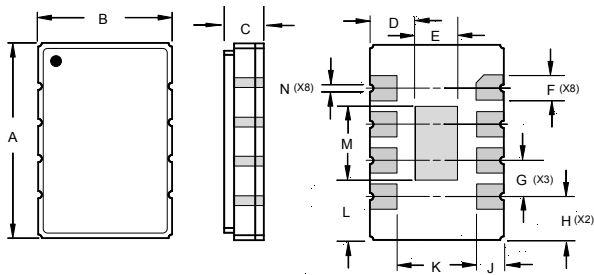


Footprint

Actual size footprint:




Typical Printed Circuit Board Land Pattern

A typical land pattern for a circuit board is shown below. Grounding of the metallic center pad is optional.

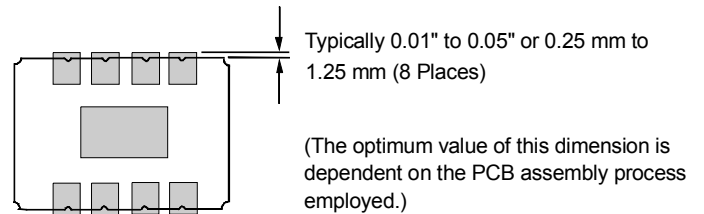


Typical Test Circuit

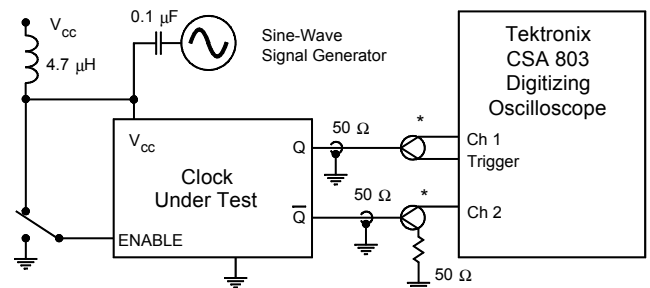


*Power Splitter, Mini-Circuits ZFSC2-4

Timing Definitions


Propagation Delay:

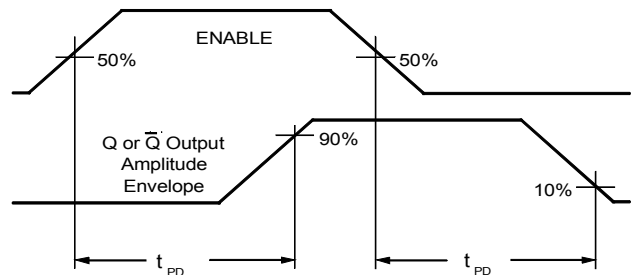

Symmetry:

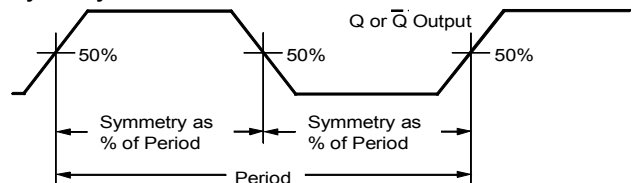


Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A	13.46	13.97	0.530	0.550
B	9.14	9.66	0.360	0.380
C	2.05 Nominal		0.081 Nominal	
D	3.56 Nominal		0.141 Nominal	
E	2.24 Nominal		0.088 Nominal	
F	1.27 Nominal		0.050 Nominal	
G	2.54 Nominal		0.100 Nominal	
H	3.05 Nominal		0.120 Nominal	
J	1.93 Nominal		0.076 Nominal	
K	5.54 Nominal		0.218 Nominal	
L	4.32 Nominal		0.170 Nominal	
M	4.83 Nominal		0.190 Nominal	
N	0.50 Nominal		0.020 Nominal	

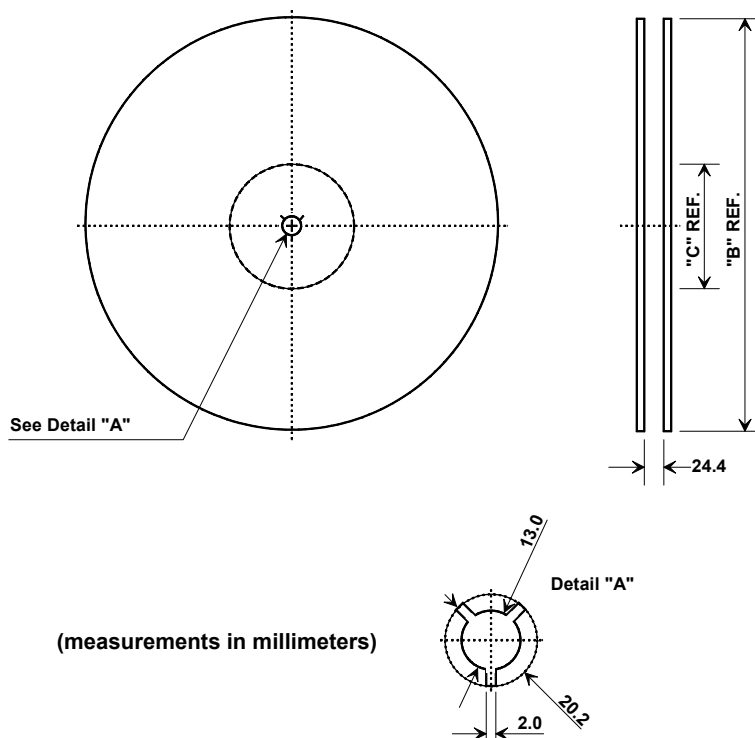

SMC-08 Case

Reel Size			Quantity Per Reel	
"B" Nominal		"C" Nominal	Min	Max
7 Inch	178 mm	100 mm	200	500

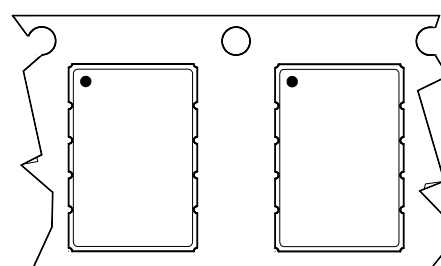

Orientation in Tape Carrier as Shipped

Dimensions

Carrier Tape Dimensions		Cover Tape Size
Ao	.383 ± .004 (9.7)	21.3mm
Bo	.554 ± .004 (14.1)	
Ko	.130 ± .004 (3.3)	
P	12mm	
W	24mm	
Tape Length	60M	
Pockets/M	83/M	

