



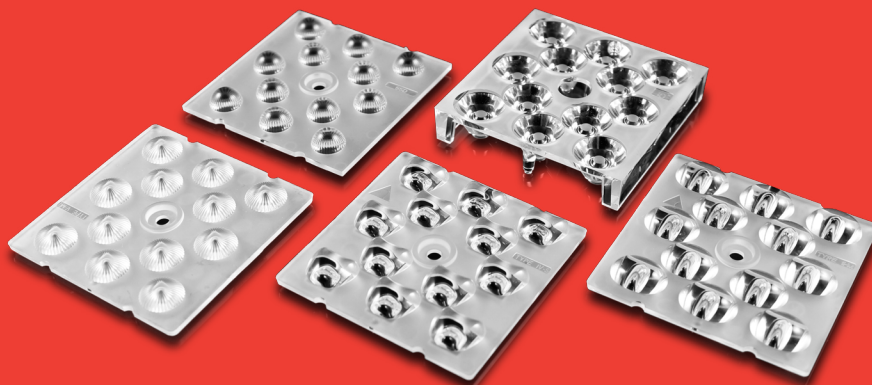

Datasheet

CRC Series

Available Distribution

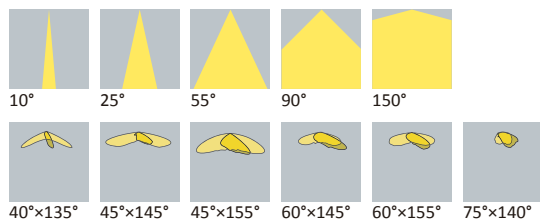

LED



Recommend Applications



General Information

PC 110°C -40°C	PC 1250Z HB 1.5mm RTI 125°C	400nm~900nm > 90%		
----------------------	-----------------------------------	----------------------	---	---


- Lens Material PC 1250Z
- Operating Temperature -40°C~+110°C
- UL Flammability HB @ 1.5mm
- UL RTI Elec 125°C @ 1.5mm
- Light Transmission Rate 400nm~900nm > 90%
- ✓ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- ⚠ Please handle or install modules with wearing gloves, skin oils may damage lens or its optical characteristic.

Dimensions

Part Number	Height	LxW
LL12ZZ-CRC25L19	6.3	50x50
LL12ZZ-CRC55L19	6.3	
LL12ZZ-CRC90L19	3.8	
LL12ZZ-CRC150L19	4.05	
LL12ZZ-CRC40135L19	5.3	
LL12ZZ-CRC45145L19	5.3	
LL12ZZ-CRC45155L19	5.3	
LL12ZZ-CRC60145L19	4.9	
LL12ZZ-CRC60155L19	5.1	
LL12ZZ-CRC75140L19	4.6	
LL12SS-CRC10L19	9.6	
LL12SS-CRC25L19	6.29	
LL12SS-CRC55L19	5.63	
LL12SS-CRC90L19	4.91	

*All dimensions are in millimeters.

Packaging Details (SPQ)




Mechanical Specification


*All dimensions are in millimeters.

Lens Dimension

LL12ZZ-CRCxL19 (25°/55°)

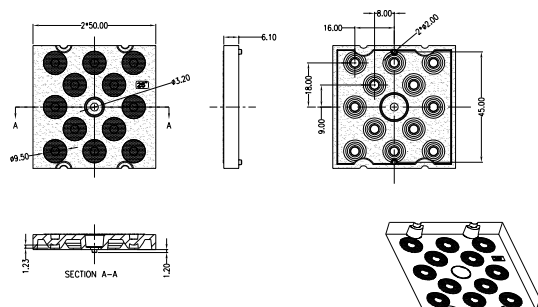


LL12ZZ-CRCxL19 (90°/150°)

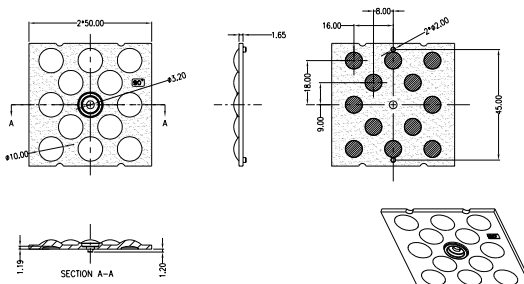


Lens Dimension

LL12ZZ-CRCxL19 (40°x135°/45°x145°/45°x155°/60°x145°/60°x155°)

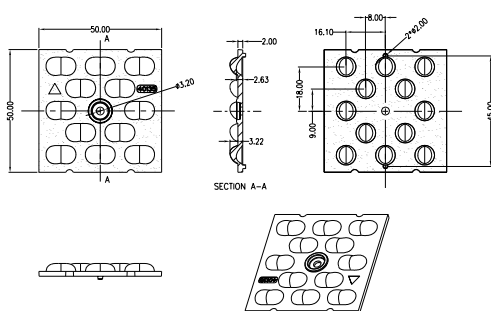


LL12ZZ-CRC75140L19

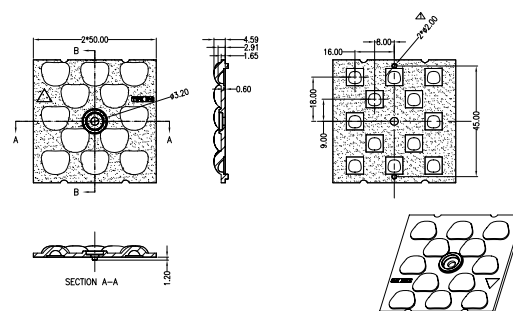

Assembly Instruction

Part No LL12ZZ-CRCxL19


Fixing Method



Assembly Instruction

Part No LL12ZZ-CRCxL19
LED LUXEON 3030 2D

Fixing Method

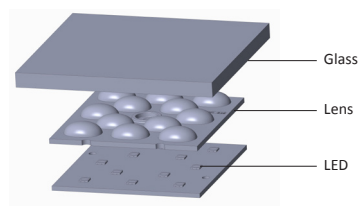


The height of the glass is 5mm.
Place the bottom of the glass above the top of the PCB with distance 10mm.


*Screw : The Maximum tightening torque for centre screw is 0.6Nm, which is mainly screw in for assembly.

Lens Dimension

LL12SS-CRC10L19

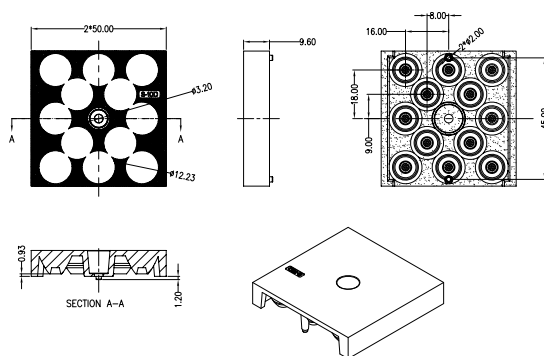


LL12SS-CRC25L19

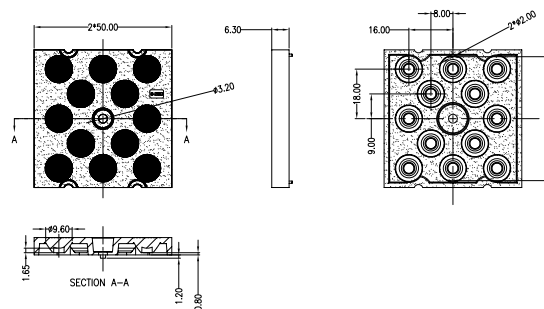


Lens Dimension

LL12SS-CRC55L19

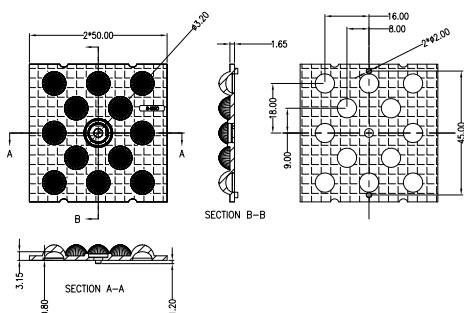


LL12SS-CRC90L19

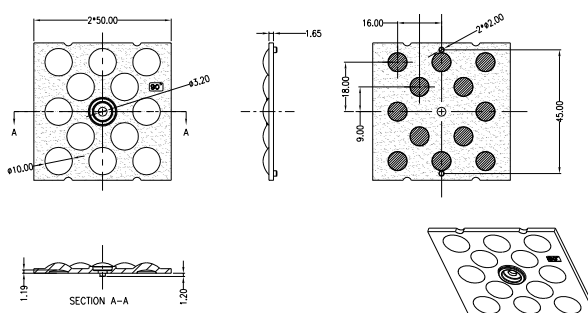

Assembly Instruction

Fixing Method


Part No LL12SS-CRCxL19



*Screw : The Maximum tightening torque for centre screw is 0.6Nm, which is mainly screw in for assembly.

Photometric Distribution

LL12ZZ-CRCxL19


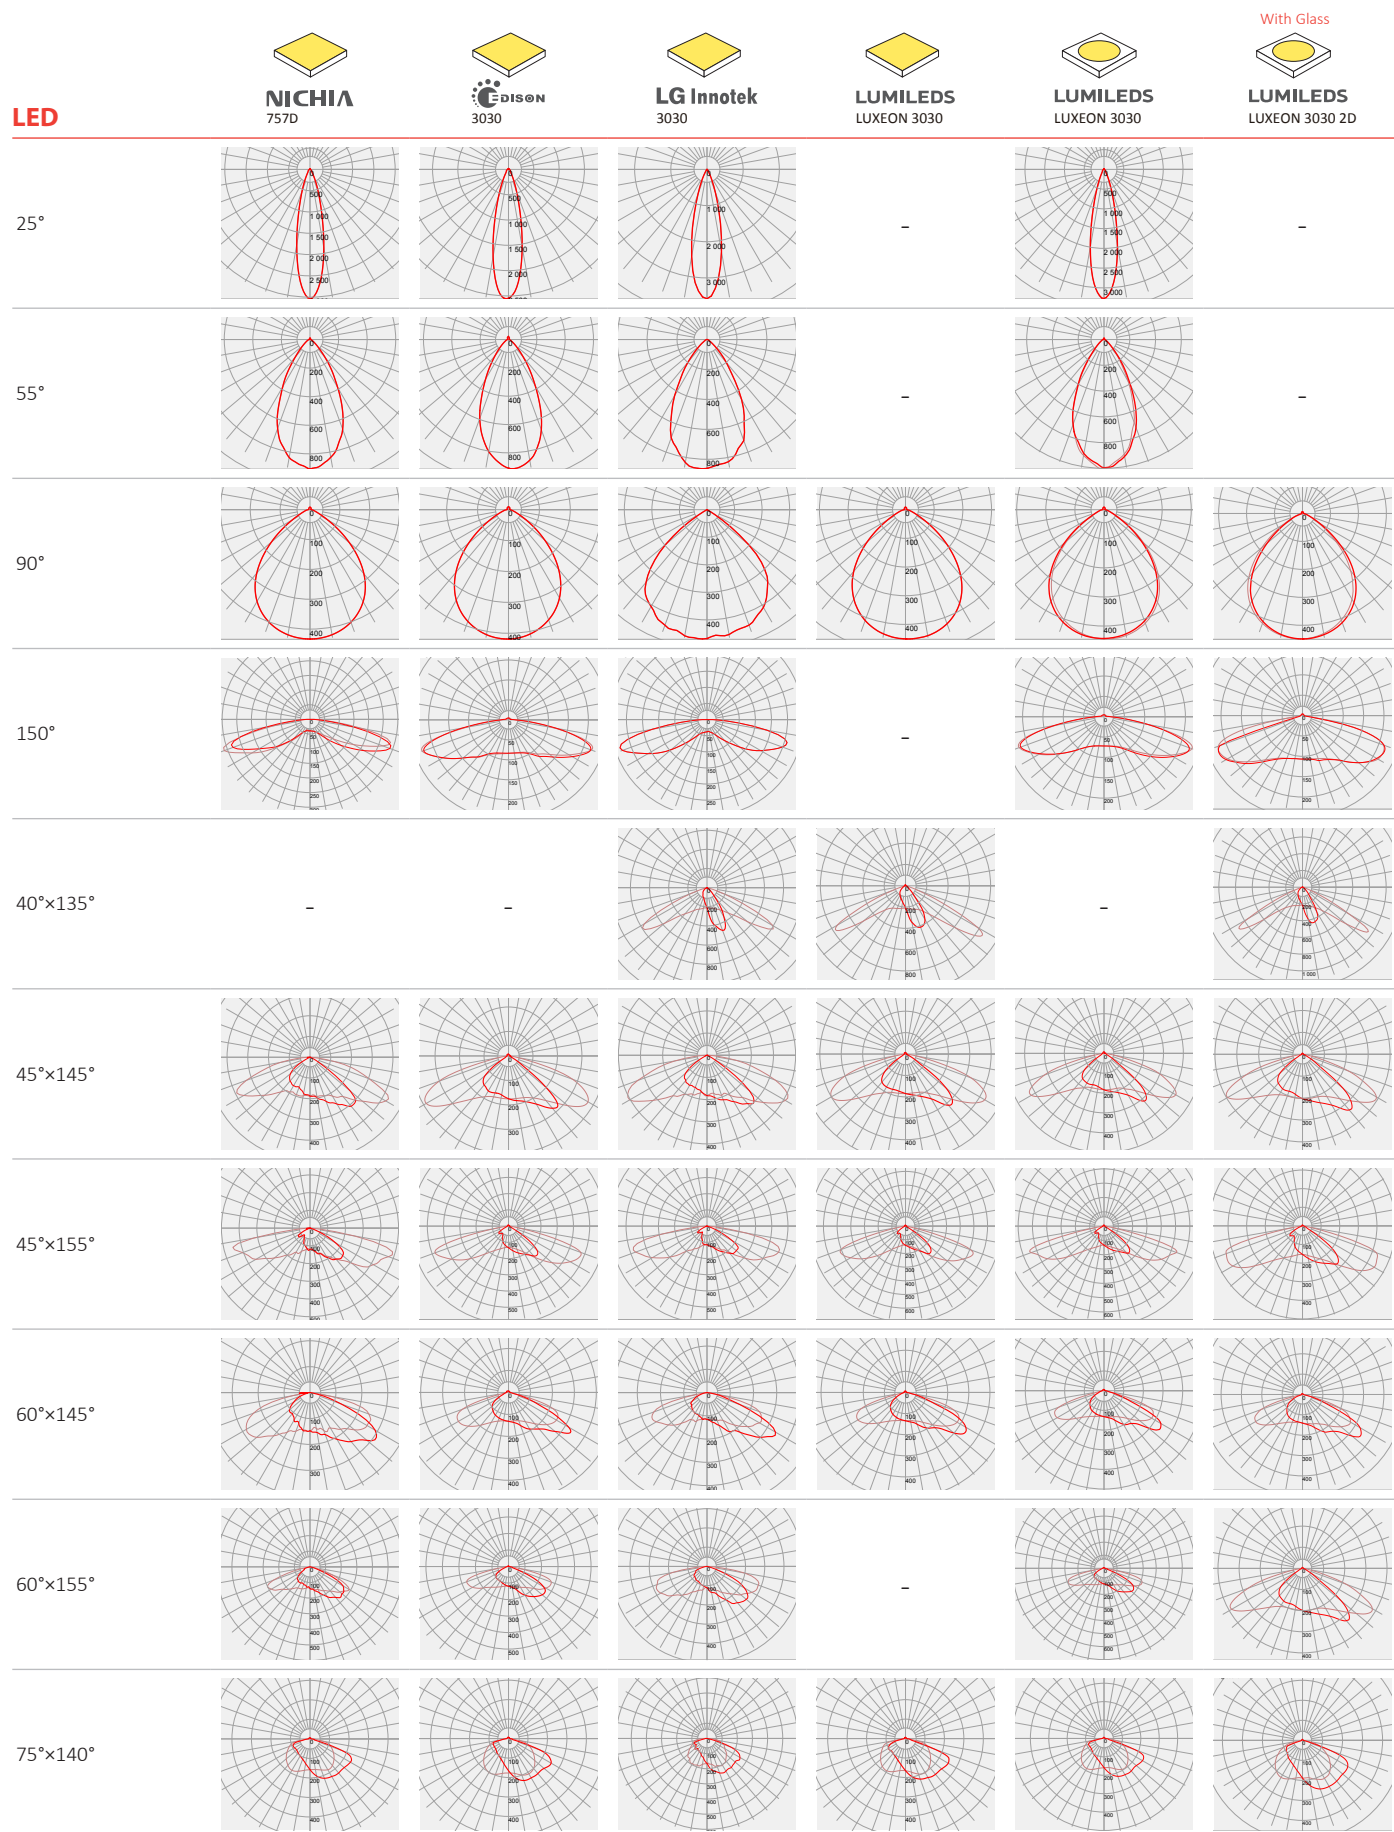


LL12SS-CRCxL19



LED





10°





25°



55°



90°



Details by LED

Part No	Accessories	LED Package Size	LED
LL12ZZ-CRCxxL19	-	3030	     
LL12SS-CRCxxL19	-	3535	 

LED	Part No	Type	FWHM	cd / lm	IES
 NICHIA 757D	LL12ZZ-CRC25L19	-	23°	3.0	
	LL12ZZ-CRC55L19	-	55°	0.9	
	LL12ZZ-CRC90L19	-	92°	0.4	
	LL12ZZ-CRC150L19	VS-Medium	160°	0.3	
	LL12ZZ-CRC40135L19	-	-	-	-
	LL12ZZ-CRC45145L19	II-Short	88°x151°	0.4	
	LL12ZZ-CRC45155L19	II-Medium	69°x161°	0.6	
	LL12ZZ-CRC60145L19	III-Short	59°x°153	0.4	
	LL12ZZ-CRC60155L19	III-Medium	66°x144°	0.6	
 EDISON 3030	LL12ZZ-CRC25L19	-	25°	2.5	
	LL12ZZ-CRC55L19	-	52°	0.9	
	LL12ZZ-CRC90L19	-	90°	0.4	
	LL12ZZ-CRC150L19	V-Medium	160°	0.2	
	LL12ZZ-CRC40135L19	-	-	-	-
	LL12ZZ-CRC45145L19	II-Short	98°x147°	0.4	
	LL12ZZ-CRC45155L19	II-Medium	61°x153°	0.5	
	LL12ZZ-CRC60145L19	III-Short	44°x148°	0.4	
 LG Innotek 3030	LL12ZZ-CRC25L19	-	26°	3.0	
	LL12ZZ-CRC55L19	-	60°	0.8	
	LL12ZZ-CRC90L19	-	96°	0.4	
	LL12ZZ-CRC150L19	VS-Medium	163°	0.2	
	LL12ZZ-CRC40135L19	I-Short	33°x132°	1.0	
	LL12ZZ-CRC45145L19	II-Short	93°x153°	0.4	
	LL12ZZ-CRC45155L19	III-Medium	61°x160°	0.5	
	LL12ZZ-CRC60145L19	III-Short	43°x153°	0.4	
	LL12ZZ-CRC60155L19	III-Medium	59°x163°	0.4	
	LL12ZZ-CRC75140L19	IV-Medium	83°x141°	0.5	

LED	Part No	Type	FWHM	cd / lm	IES
 LUMILEDS LUXEON 3030	LL12ZZ-CRC25L19	-	-	-	-
	LL12ZZ-CRC55L19	-	-	-	-
	LL12ZZ-CRC90L19	-	92°	0.4	
	LL12ZZ-CRC150L19	-	-	-	-
	LL12ZZ-CRC40135L19	I-Short	37°x129°	1.0	
	LL12ZZ-CRC45145L19	II-Short	97°x147°	0.4	
	LL12ZZ-CRC45155L19	II-Medium	60°x149°	0.6	
	LL12ZZ-CRC60145L19	III-Short	45°x148°	0.5	
	LL12ZZ-CRC60155L19	-	-	-	-
	LL12ZZ-CRC75140L19	IV-Short	85°x151°	0.5	
 LUMILEDS LUXEON 3030	LL12ZZ-CRC25L19	-	23°	3.2	
	LL12ZZ-CRC55L19	-	54°	1.0	
	LL12ZZ-CRC90L19	-	91°	0.4	
	LL12ZZ-CRC150L19	V-Short	160°	0.2	
	LL12ZZ-CRC40135L19	-	-	-	-
	LL12ZZ-CRC45145L19	II-Short	96°x146°	0.4	
	LL12ZZ-CRC45155L19	II-Medium	58°x152°	0.6	
	LL12ZZ-CRC60145L19	III-Short	43°x147°	0.5	
	LL12ZZ-CRC60155L19	III-Medium	50°x155°	0.7	
	LL12ZZ-CRC75140L19	IV-Medium	87°x150°	0.5	
 LUMILEDS LUXEON 3030 2D With Glass	LL12ZZ-CRC25L19	-	-	-	-
	LL12ZZ-CRC55L19	-	-	-	-
	LL12ZZ-CRC90L19	-	91°	0.4	
	LL12ZZ-CRC150L19	-	149°	0.2	
	LL12ZZ-CRC40135L19	I-Short	33°x125°	1.1	
	LL12ZZ-CRC45145L19	II-Short	94°x144°	0.4	
	LL12ZZ-CRC45155L19	II-Short	64°x151°	0.5	
	LL12ZZ-CRC60145L19	III-Short	46°x146°	0.4	
	LL12ZZ-CRC60155L19	II-Short	95°x144°	0.4	
	LL12ZZ-CRC75140L19	IV-Short	90°x134°	0.4	
 CREE XP-G3	LL12SS-CRC10L19	-	19°	4.4	
	LL12SS-CRC25L19	-	25°	2.6	
	LL12SS-CRC55L19	-	67°	0.5	
	LL12SS-CRC90L19	-	98°	0.3	
 SAMSUNG LH3518	LL12SS-CRC10L19	-	19°	5.6	
	LL12SS-CRC25L19	-	26°	2.9	
	LL12SS-CRC55L19	-	56°	0.7	
	LL12SS-CRC90L19	-	88°	0.4	

Product Nomenclature

Ledlink Led Type Lens Angle
LL 12 ZZ -CRC 25 L19
Lens Dot Number Serial Number Type of Material

Ledlink Optics, Inc

Taiwan HQ

15F, No.655, Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd

Dongguan Factory

No.5, TianKeng Industrial Dist., HengLi Town, DongGuan City,
GuangDong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd

Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

