

MX554ENT20M0000

Ultra-Low Jitter 20MHz LVCMOS XO

ClockWorks® FUSION

General Description

The MX554ENT20M0000 is an ultra-low phase jitter XO with LVCMOS output optimized for high line rate applications.

Features

- 20MHz LVCMOS
- Typical phase noise:
 - 83fs (Integration range: 1.875MHz-5MHz)
- ±50ppm total frequency stability
- -40°C to +85°C temperature range
- Industry standard 6-Pin 5mm x 3.2mm LGA package

Absolute Maximum Ratings

| Supply Voltage (VIN) | +4.6V |
|---------------------------------------|-------|
| Lead Temperature (soldering, 10s) | |
| Storage Temperature (T _S) | 125°C |
| ESD Rating (HBM) | |

Operating Ratings

| Supply Voltage (VIN) | +2.375V to +3.63V |
|--------------------------|-------------------|
| Ambient Temperature (TA) | 40°C to $+85$ °C |

Electrical Characteristics

VDD = 2.375 - 3.63V, TA = -40°C to +85°C, output terminated with 50 Ohms to VDD/2.1

| Symbol | Parameter | Condition | Min. | Тур. | Max. | Units |
|--------|---------------------|------------------------------------------------------------------------|-----------|-----------|-----------|-------|
| IDD | Supply Current | | | | 95 | mA |
| F0 | Center Frequency | | | 20 | | MHz |
| | Frequency Stability | Note 2 | | | ±50 | ppm |
| Øj | Phase Noise | Integration Range (12kHz to 5MHz) Integration Range (1.875MHz to 5MHz) | | 136 83 | | fsRMS |
| Tstart | Start-Up Time | | | | 20 | ms |
| TR/TF | Rise/Fall time | | 100 | | 500 | ps |
| | Duty Cycle | | 45 | | 55 | % |
| VIH | Input High Voltage | 3.3V Operation | 2 | | VDD + 0.3 | V |
| VIL | Input Low Voltage | 3.3V Operation | -0.3 | | 0.8 | V |
| VOH | Output High Voltage | LVCMOS output levels | VDD - 0.8 | | | V |
| VOL | Output Low Voltage | LVCMOS output levels | | | 0.6 | V |

Notes:

- 1. Guaranteed after thermal equilibrium.
- $2.\ Inclusive\ of\ initial\ accuracy,\ temperature\ drift,\ aging,\ shock,\ vibration.$

ClockWorks is a registered trademark of Microchip Technology Inc.

Microchip Technology Inc. http://www.microchip.com


October 27, 2016 MX554EN2-4484 Revision 1.0 tcghelp@microchip.com

Ordering Information

| Ordering Part Number | Marking Line 1 | Marking Line 3 | Shipping | Package |
|----------------------|----------------|----------------|---------------|-----------------------|
| MX554ENT20M0000 | MX554E | NT0200 | Tube | 6-Pin 5mm x 3.2mm LGA |
| MX554ENT20M0000 TR | MX554E | NT0200 | Tape and Reel | 6-Pin 5mm x 3.2mm LGA |

Devices are Green and RoHS compliant. Sample material may have only a partial top mark.

Pin Configuration



Pin Description

| Pin Number | Pin Name | Pin Type | Pin Level | Pin Function |
|------------|----------|----------|-----------|---------------------------------------------------------------------------------------------|
| 1 | DNC | | | Make no connection, leave floating. |
| 2 | OE | I, SE | LVCMOS | Output Enable, disables output to tri-state, 0 = Disabled, 1 = Enabled, 50k Ohms Pull-Up |
| 3 | GND | PWR | | Power Supply Ground |
| 4, 5 | Q, DNC | O, SE | LVCMOS | Clock Output Frequency = 20MHz |
| 6 | VDD | PWR | | Power Supply |

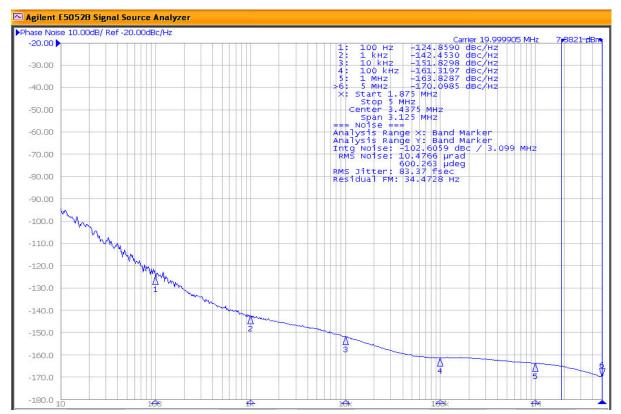


Figure 1. LVCMOS Output 20MHz 1.875MHz-5MHz 83fs


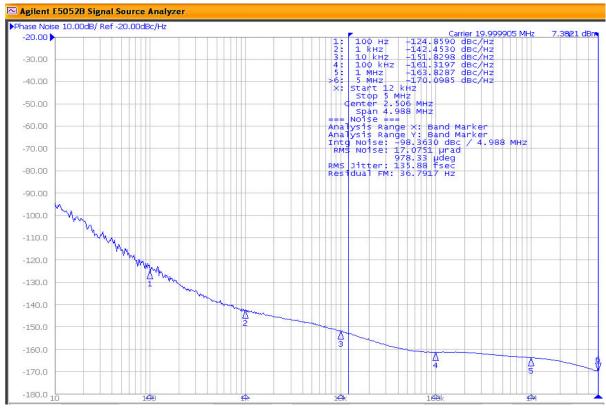


Figure 2. LVCMOS Output 20MHz 12kHz-5MHz 136fs

Package Information and Recommended Land Pattern for 6-Pin LGA³

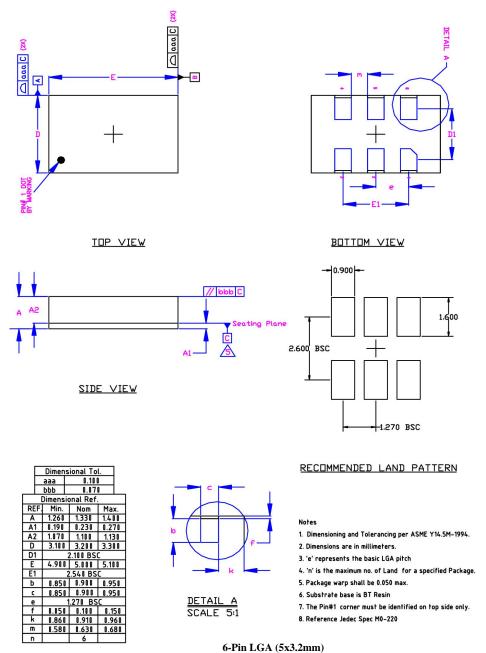

Note:

3. Package information is correct as of the publication date. For updates and most current information, go to www.microchip.com.

Microchip Technology Inc.

http://www.microchip.com

Microchip makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Microchip does not assume responsibility for its use. Microchip reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Microchip's terms and conditions of sale for such products, Microchip assumes no liability whatsoever, and Microchip disclaims any express or implied warranty relating to the sale and/or use of Microchip products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

© 2016 Microchip Technology Inc.

October 27, 2016 4 Revision 1.0 MX554EN2-4484 tcghelp@microchip.com