







■ Features

- · Constant Voltage + Constant Current mode output
- · Plastic housing with Class II design
- · Built-in active PFC function
- · Class 2 power unit
- Fully encapsulated with IP67 level
- Typical lifetime>50000 hours
- 5 years warranty


■ Applications

- · LED panel lighting
- · LED downlight
- LED decorative lighting
- · LED tunnel lighting
- · Moving sign

Description

LPF-40 series is a 40W AC/DC LED driver featuring the dual modes constant voltage and constant current output. LPF-40 operates from $90\sim305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the hign efficiency up to 90%, with the fanless design, the entire series is able to operate for -40°C \sim +80°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations.

■ Model Encoding

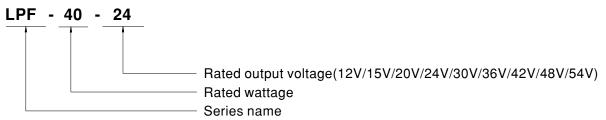



40W Constant Voltage + Constant Current LED Driver

SPECIFICATION


	LPF-40-12	LPF-40-15	LPF-40-20	LPF-40-24	LPF-40-30	LPF-40-36	LPF-40-42	LPF-40-48	LPF-40-54
DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
CONSTANT CURRENT REGION Note.2	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
RATED CURRENT	3.34A	2.67A	2A	1.67A	1.34A	1.12A	0.96A	0.84A	0.76A
	40.08W	40.08W	40W	40.08W		40.32W	40.32W	40.32W	41.04W
							1 1	250m\/n-n	350mVp-p
,									±4.0%
					_				±0.5%
									±0.5%
			1	1	±0.5 /6	±0.5 /6	±0.576	±0.5 /6	±0.5 /6
	1000ms, 80ms / 115VAC 500ms, 80ms / 230VAC								
HOLD UP TIME (Typ.)									
VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC								
EDECUENCY DANCE	,	to STATIC CI	IAINACTEINIOT	io section)					
FREQUENCY KANGE									
POWER FACTOR									
TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC)								
	`	1							
EFFICIENCY (Typ.)	84%	85%	86%	87%	88%	88%	88.5%	90%	90%
AC CURRENT									
INRUSH CURRENT(Typ.)	COLD STAR	T 50A(twidth=2	210µs measure	d at 50% Ipeal	k) at 230VAC; F	Per NEMA 410			
MAX. No. of PSUs on 16A CIRCUIT BREAKER	12 units (circuit breaker of type B) / 20 units (circuit breaker of type C) at 230VAC								
LEAKAGE CURRENT	<0.75mA / 24	0VAC							
OVER CURRENT									
CHORT CIRCUIT						lloveu			
SHORT CIRCUIT	<u> </u>					44 401/	46 54)/	E4 C2)/	E0 CCV
PROTECTION OVER VOLTAGE						41~490	40 ~ 34 V	34 ~ 63 V	59 ~ 66V
					/er				
	Tcase=-40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
MAX. CASE TEMP.	Tcase=+80°C								
WORKING HUMIDITY	20 ~ 95% RH non-condensing								
STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)								
VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
SAFETY STANDARDS Note.8	UL8750, CSA C22.2 No. 250.0-08, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384,EAC TP TC 004, IP J61347-1, J61347-2-13,GB19510.1,GB19510.14 approved; design refer to UL60950-1								
WITHSTAND VOLTAGE	11 2								
	Compliance to BS EN/EN55015,BS EN/EN61000-3-2 Class C (@load ≥ 60%); BS EN/EN61000-3-3,								
EINIO EINIOSIUN NOTE.8									
EMC IMMUNITY	Compliance to	BS EN/EN610	000-4-2,3,4,5,6	,8,11; BS EN/E	N61547, light in	idustry level (su	rge immunity Li	ine-Line 2KV),E	AC TP TC 02
MTBF	438.8Khrs m	n. MIL-HDE	3K-217F (25°C)					
DIMENSION	162.5*43*32mm (L*W*H)								
PACKING	0.44Kg; 32pcs/15.08Kg/0.93CUFT								
2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed ur 6. Length of set up time is mea 7. The driver is considered as complete installation, the fina 8. To fulfill requirements of the	ETHODS OF at 20MHz of to blerance, line re- nder low input asured at first of a component to al equipment r	LED MODULE bandwidth by usegulation and los voltages. Pleas cold start. Turn that will be openanufacturers ulation for light	E". sing a 12" twis pad regulation. ase refer to "ST ning ON/OFF t erated in comb must re-qualify	ted pair-wire te FATIC CHARA he driver may ination with fir the EMC Directive	erminated with a ACTERISTIC": lead to increational equipment.	a 0.1uf & 47uf p sections for det se of the set up Since EMC pe olete installation	parallel capacito tails. p time. erformance will n again.		, the
	CONSTANT CURRENT REGION Note.2 RATED CURRENT RATED POWER Note.5 RIPPLE & NOISE (max.) Note.3 VOLTAGE TOLERANCE Note.4 LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.) VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT INRUSH CURRENT(Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT SHORT CIRCUIT OVER VOLTAGE OVER TEMPERATURE WORKING TEMP. MAX. CASE TEMP. WORKING HUMIDITY STORAGE TEMP, HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS Note.8 WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION Note.8 EMC IMMUNITY MTBF DIMENSION PACKING 1. All parameters NOT special 2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed up 6. Length of set up time is mea 7. The driver is considered as complete installation, the fine 7. The driver is considered as complete installation, the fine	DC VOLTAGE CONSTANT CURRENT REGION Note.2 RATED CURRENT RATED POWER Note.5 RIPPLE & NOISE (max.) Note.3 RIPPLE & NOISE (max.) Note.3 VOLTAGE TOLERANCE Note.4 LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.) VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR TOTAL HARMONIC DISTORTION INCUSH CURRENT INRUSH CURRENT(Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT SHORT CIRCUIT Hiccup mode 15 ~ 17V Shut down ar OVER TEMPERATURE WORKING TEMP. WORKING TEMP. WORKING HUMIDITY SAFETY STANDARDS Note.8 WITHSTAND VOLTAGE INPONENTAGE LEMC EMISSION Note.8 WITHSTAND VOLTAGE INPONENTAGE LEMC IMPONENTAGE INPONENTAGE WITHSTAND VOLTAGE INPONENTAGE MAS. CASE TEMP. WORKING HUMIDITY LO ~ 95% RH STORAGE TEMP., HUMIDITY TCASE=-40 ~ 10.03%/°C (COMPLA).6 WITHSTAND VOLTAGE WITHSTAND VOLTAGE WITHSTAND VOLTAGE INPONENTAGE MAS. CASE TEMP. WORKING HUMIDITY LO ~ 95% RH STORAGE TEMP., HUMIDITY TO ~ 500Hz, 50 WITHSTAND VOLTAGE WITHSTAND VOLTAGE INPONENTAGE WITHSTAND VOLTAGE INPONENTAGE WITHSTAND VOLTAGE INPONENTAGE MAS. SAFETY STANDARDS Note.8 WITHSTAND VOLTAGE INPONENTAGE WITHSTAND VOLTAGE INPONENTAGE WITHSTAND VOLTAGE INPONENTAGE IN	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE 12V	DC VOLTAGE	DC VOLTAGE	DC VOLTAGE 12V 15V 20V 24V 30V 36V 42V 48V 42V 48V 42V 48V 48

 $\hbox{$\times$ Product Liability Disclaimer: For detailed information, please refer to $https://www.meanwell.com/serviceDisclaimer.aspx}$$




■ BLOCK DIAGRAM

fosc: 100KHz

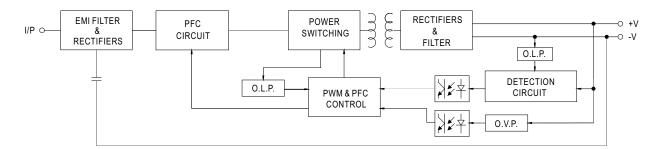

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

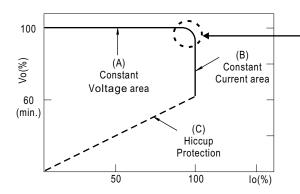


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.



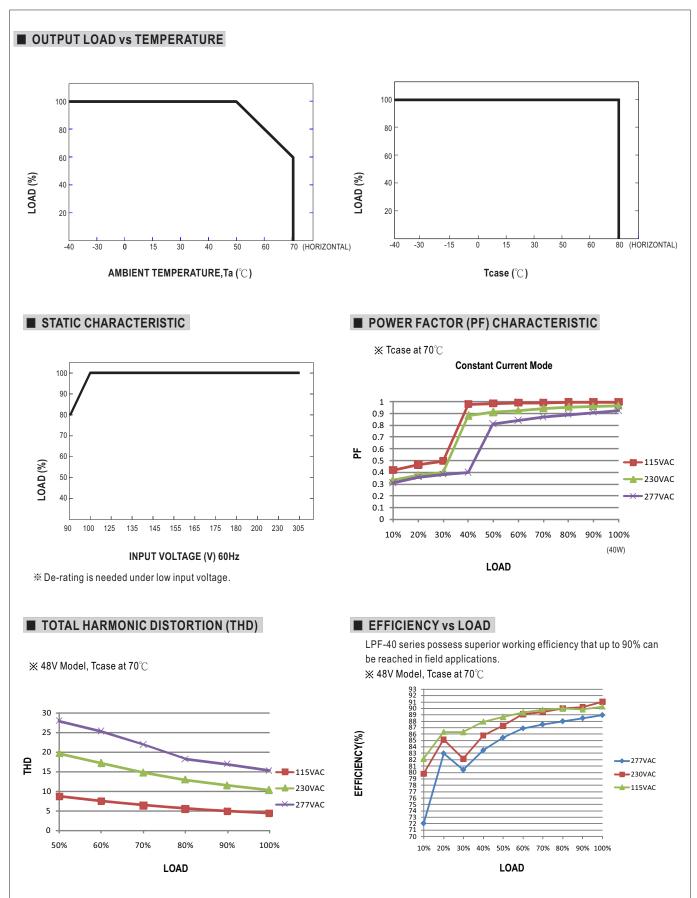




■ LIFE TIME

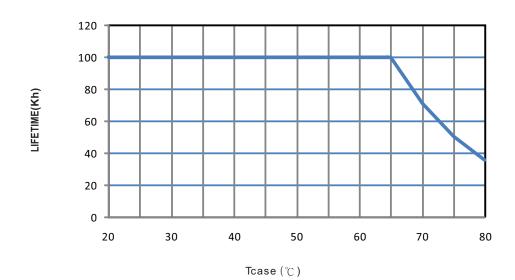



■ MECHANICAL SPECIFICATION

CASE NO.: LPF-60B Unit:mm

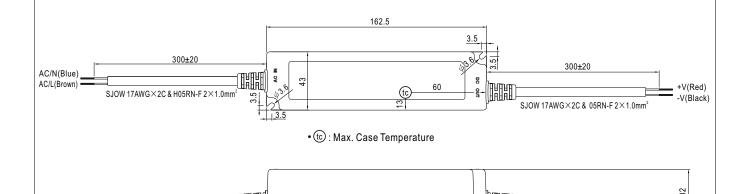

■ Recommend Mounting Direction



■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html