


Reflective Object Sensor

OPB608A, OPB608B, OPB608R, OPB608V



Features:

- Phototransistor output
- Unfocused for sensing diffuse surface
- Low-cost plastic housing
- Enhanced signal to noise ratio
- Reduced ambient light sensitivity

Description:

OPB608 reflective switches consist of an infrared emitting device (LED or multimode VCSEL) and a NPN silicon phototransistor mounted "side-by-side" on a parallel axis in a black opaque plastic housing. All OPB608's (**except OPB608R**) have an emitting device and a phototransistor that are encapsulated in a visible filtering epoxy. The phototransistor responds to radiation from the emitter only when a reflective object passes within its field of view. The phototransistor has enhanced low current roll-off to improve the contrast ratio and immunity to background irradiance. LED versions are designed for near-field applications. The VCSEL version is designed for longer distances.

OPB608A and **OPB608B** devices are designed for applications with reflective distances between 0.050" (1.270 mm) and 0.375" (9.525 mm). **OPB608V** is designed for applications with reflective distances between 0.050" (1.270 mm) and 1.200" (30.480 mm). All of these are designed for light patterns not visible to the human eye. By utilizing the night enhancement function of a camera, the near infrared light pattern can be seen. This allows a user to see the pattern shining on the reflective object.

OPB608R is designed for applications with reflective distances between 0.050" (1.270 mm) and 0.300" (7.620 mm). It is designed for light patterns visible to the human eye. The efficiency of this sensor is lower for optical wavelengths in the visible range, thus reducing the distance that can be used.

OPB608V is ESD sensitive, take normal ESD precautions when handling this product.

Reflective distances are dependent upon the drive current for the light emitting device, the wavelength of the light source, and the type of reflective material; therefore, each application should be checked for the ability to meet each requirement.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:

- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Machine safety
- End of travel sensor
- Door sensor

Ordering Information				
Part Number	LED Peak Wavelength	Sensor	Reflection Distance	Lead Length
OPB608A	890 nm	Rbe Transistor	See Graph on Page 5, 6	0.18" (Min)
OPB608B				
OPB608R	660 nm			
OPB608V	850 nm			



Additional laser safety information can be found on the Optek website. See application bulletin #221. Classification is not marked on the device due to space limitations. See package outline for centerline of optical radiance. Operating devices beyond maximum rating may cause devices to exceed rated classification.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com


Electrical Specifications

Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)


Storage Temperature Range		-40° C to +85° C
Operating Temperature Range	OPB608 A, B, & R OPB608V	-40° C to +85° C 0° C to +70° C
Lead Soldering Temperature [1/16 inch (1.6 mm) from the case for 5 sec. with soldering iron] ⁽¹⁾		260° C
OPB608A, OPB608B (Infrared-LED — 890 nm)		
Forward DC Current		50 mA
Peak Forward Current (1 μs pulse width, 300 pps)		3 A
Reverse DC Voltage		2 V
Total Power Dissipation ⁽³⁾		75 mW
OPB608R (Visible Red-LED — 660 nm)		
Forward DC Current		50 mA
Reverse DC Voltage		5 V
Total Power Dissipation ⁽³⁾		75 mW
OPB608V (Infrared-VCSEL — 850 nm)		
Forward DC Current		12 mA
Reverse DC Voltage		5 V
Phototransistor		
Collector-Emitter Voltage		30 V
Emitter Reverse Current		10 mA
Collector DC Current		25 mA
Total Power Dissipation ⁽³⁾		100 mW

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) Methanol or isopropanol are recommended as cleaning agents. The plastic housing is soluble in chlorinated hydrocarbons and ketones.
- (3) OPB608A, OPB608B, and OPB608R Derate linearly 1.08 mW/°C.

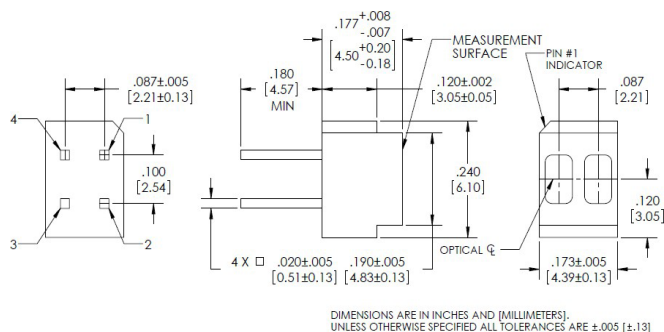

Pin #	LED	Pin #	Transistor
4	Cathode	1	Collector
3	Anode	2	Emitter



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Reflective Object Sensor

OPB608A, OPB608B, OPB608R, OPB608V



Electrical Specifications

Electrical Characteristics ($T_A = 25^\circ \text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Infrared-LED (890 nm)						
V_F	Forward Voltage	1.0	-	1.7	V	$I_F = 20 \text{ mA}$
I_R	Reverse Current	-	-	100	μA	$V_R = 2 \text{ V}$
Infrared-LED (660 nm)						
V_F	Forward Voltage	1.0	1.9	2.5	V	$I_F = 20 \text{ mA}$
V_R	Reverse Voltage	5	-	-	V	$I_R = 10 \mu\text{A}$
Infrared VCSEL (850 nm)						
V_F	Forward Voltage	1.0	-	2.2	V	$I_F = 7 \text{ mA}$
I_R	Reverse Current	-	-	30	nA	$V_R = 5 \text{ V}$
I_{TH}	Threshold Current	2	-	5.5	mA	-
Θ	Beam Divergence	-	12	-	Deg.	$I_F = 12 \text{ mA}$
Phototransistor						
$V_{(BR)CEO}$	Collector Emitter Breakdown Voltage	30	-	-	V	$I_C = 100 \mu\text{A}$, $E_E = 0 \mu\text{W}/\text{cm}^2$
$V_{(BR)ECO}$	Emitter Collector Breakdown Voltage	0.4	-	-	V	$I_E = 100 \mu\text{A}$, $E_E = 0 \mu\text{W}/\text{cm}^2$
$V_{CE(SAT)}$	Saturation Voltage	-	-	.40	V	$I_C = 100 \mu\text{A}$, $I_F = 20 \text{ mA}$, $d = 0.053''$
I_{CEO}	Collector Emitter Dark Current	-	-	100	nA	$V_{CE} = 5 \text{ V}$, $E_E = \leq .10 \mu\text{W}/\text{cm}^2$, $I_F = 0$
Combined						
$I_{C(ON)}^{(1)(2)}$	On-State Collector Current					
	OPB608A	2	-	-	mA	$V_{CE} = 5 \text{ V}$, $I_F = 20 \text{ mA}$, $d = 0.053 \text{ inch}$ (1.35 mm)
	OPB608B	1	-	4		
	OPB608R	1	-	6		
	OPB608V	5	-	-		$V_{CE} = 5 \text{ V}$, $I_F = 10 \text{ mA}$, $d = 0.053 \text{ inch}$ (1.35 mm)
$I_{C(OFF)}$	Off-State Collector Current					
	LED	-	-	100	nA	No reflective surface, $V_{CE} = 5 \text{ V}$ $I_F = 20 \text{ mA}$ $I_F = 10 \text{ mA}$
	VCSEL	-	-	100		

Notes:

- (1) Distance from the front of the lens to reflective surface.
- (2) Measured using Eastman Kodak gray card. The white side of the card is used as a 90 % diffuse reflective surface. Reference Eastman Kodak catalog #E152 7795.
- (3) All parameters are tested using pulse techniques.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTeK Technology
www.ttelectronics.com | sensors@ttelectronics.com


Reflective Object Sensor

OPB608A, OPB608B, OPB608R, OPB608V




Typical Performance


Reflective Response

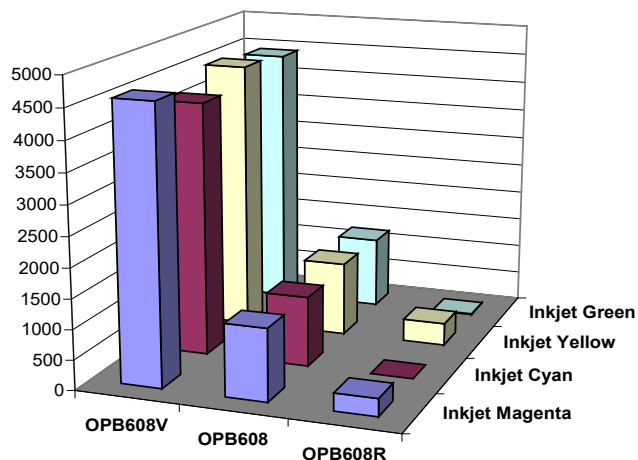


Reflective Response

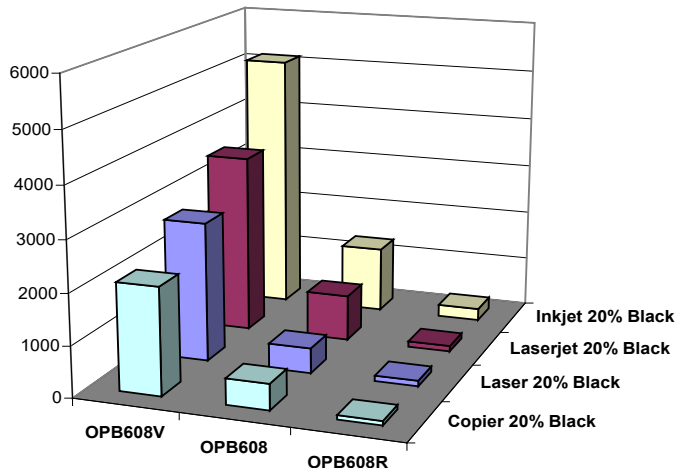


Reflective Response

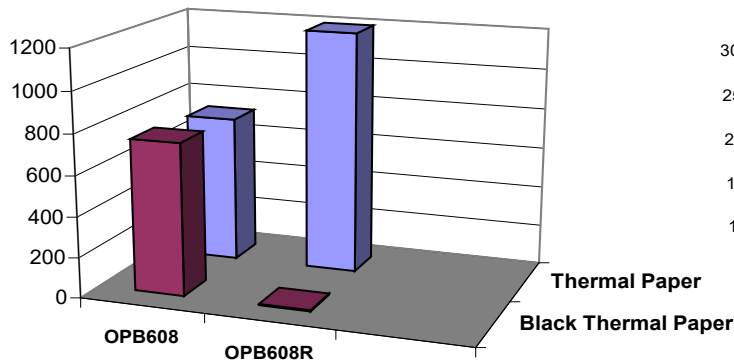


Reflective Response

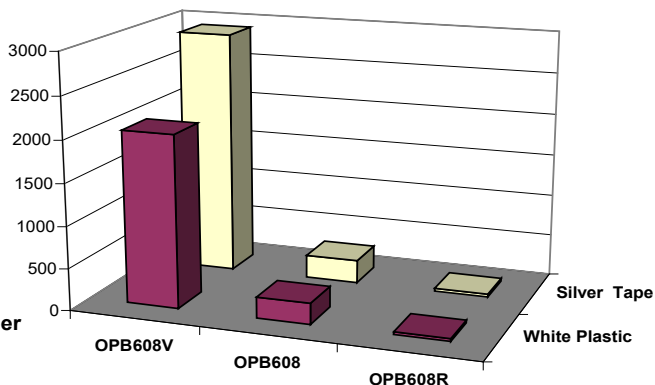

Reflective Response

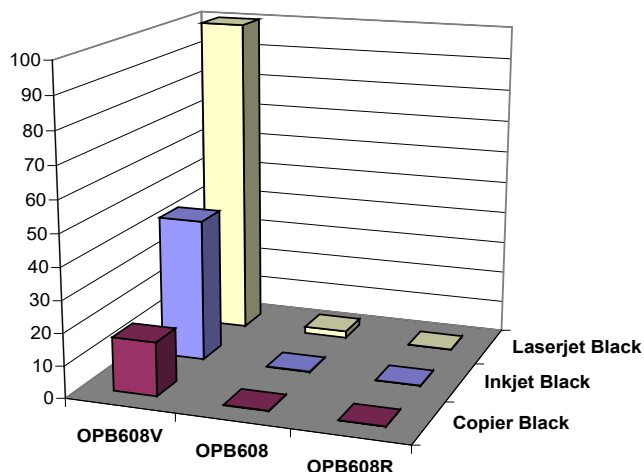

Relative Response

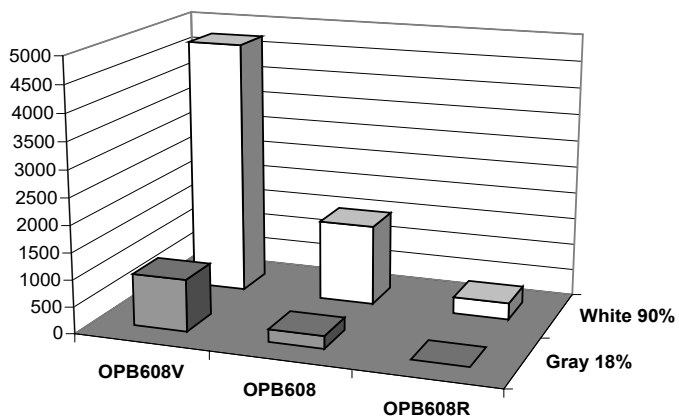

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.





TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Reflective Object Sensor

OPB608A, OPB608B, OPB608R, OPB608V



Typical Performance

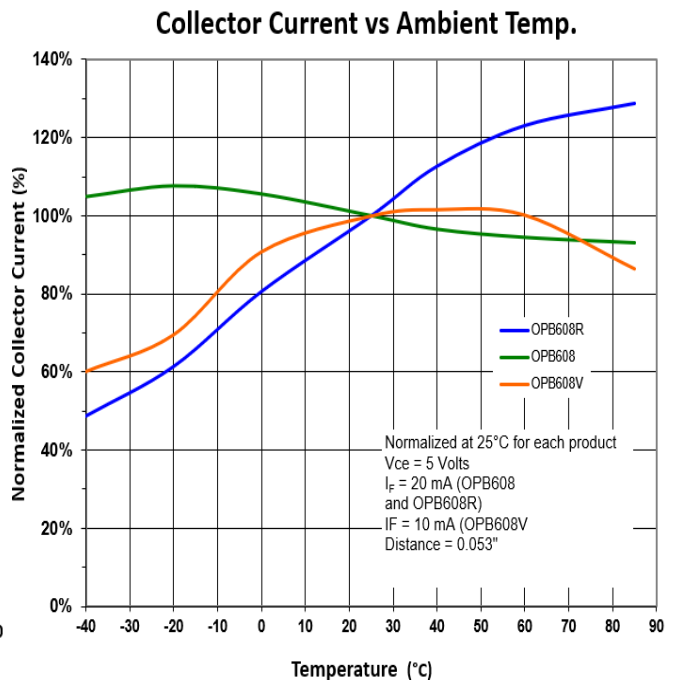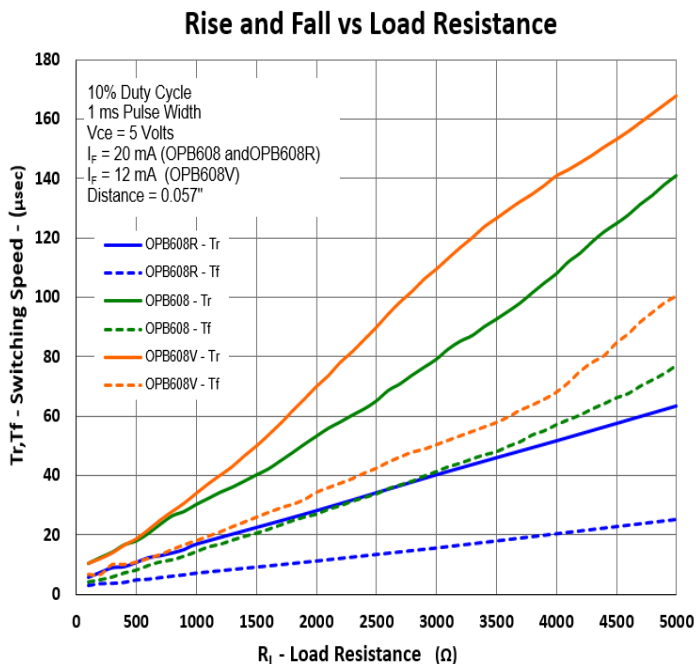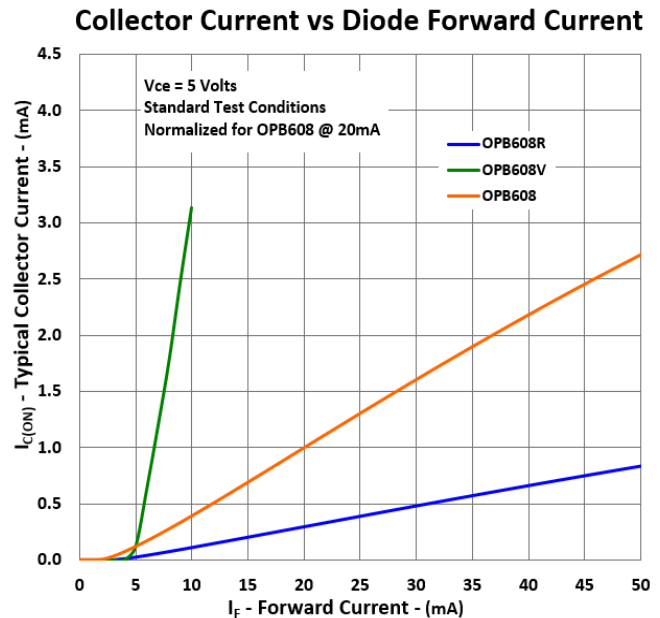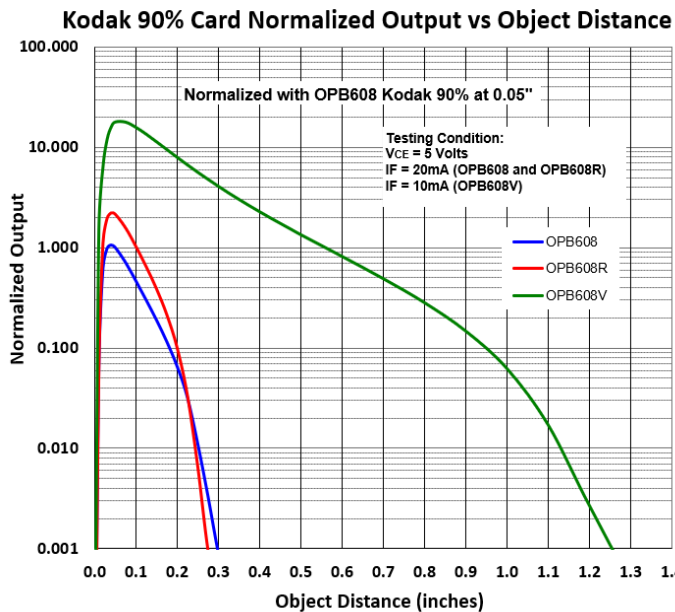


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | OPTeK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Typical Performance


OPB608 LED Forward Voltage vs I_f vs Temp

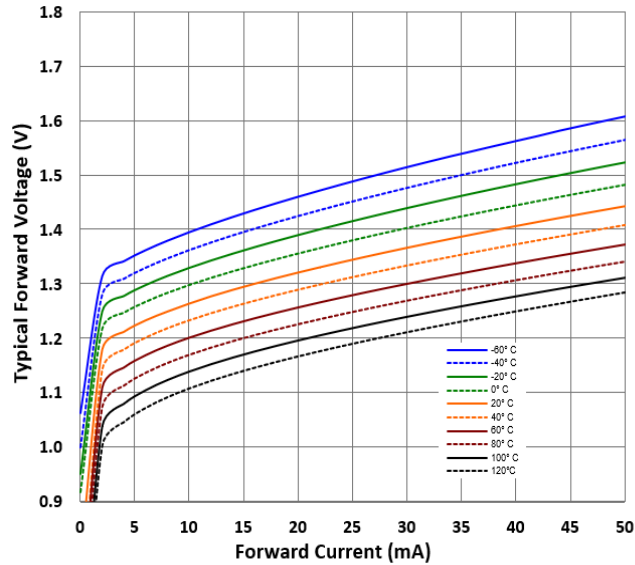

OPB608R Forward Voltage vs Current vs Temperature

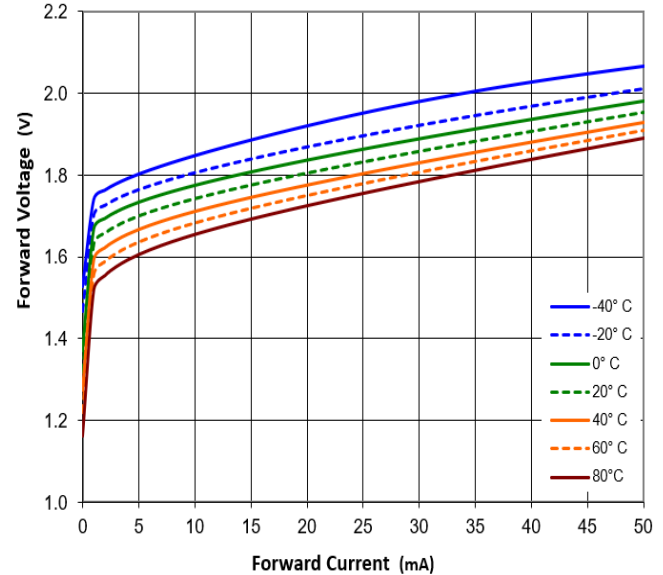

OPB608V VCSEL Forward Voltage vs Current

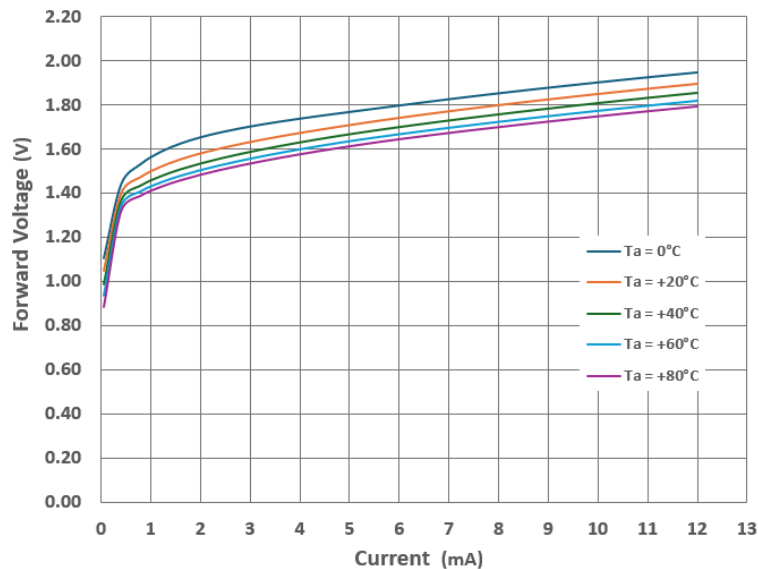

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com