
2-conductor through terminal block;  $16 \text{ mm}^2$ ; suitable for Ex e II applications; side and center marking; for DIN-rail  $35 \times 15$  and  $35 \times 7.5$ ; Push-in CAGE CLAMP®;  $16,00 \text{ mm}^2$ ; grav




https://www.wago.com/2016-1201



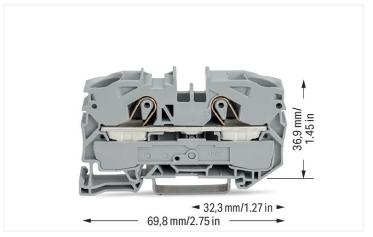

Color: ■ gray



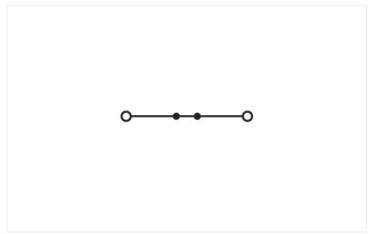

Similar to illustration

#### Through terminal block, 2016 Series, Push-in CAGE CLAMP®

Quick and easy connections are guaranteed with this through terminal block (item number 2016-1201). Whether for use in industry or building installations, our rail-mount through terminal blocks allow you to quickly and securely connect electrical conductors. They're perfect for either classic throughwiring or distributing potential, depending on the variant. Rated current and voltage are key factors to consider when choosing a through rail-mount terminal block, as they indicate how the product can be used. This product has a rated voltage of 800 V and a rated current of 76 A. Strip lengths must be between 18 mm and 20 mm when connecting conductors to this through terminal block. This product features conductor terminals and utilizes Push-in CAGE CLAMP®. Our Push-in CAGE CLAMP® is a universal, maintenance-free connection solution for all conductor types, boasting a key feature: both solid and fine-stranded conductors with ferrules can be directly inserted without the need for tools or any preparation, such as crimping the ferrule. Dimensions: 12 x 69.8 x 43.5 mm (width x height x depth). This through terminal block is suitable for conductor cross sections ranging from 0.5 mm² to 16 mm². It features one level and two clamping points that you can use to connect a single potential. The gray housing is made of polyamide (PA66) for insulation. This through rail-mount terminal block is operated with an operating tool. Our TOPJOB® S rail-mount terminal blocks are perfect for a wide range of industrial applications and modern building installations thanks to the secure electrical connections they provide. You can work anywhere in the world and on any application with just a single rail-mount terminal block system. These through rail-mount terminal blocks are mounted using DIN-35 rails.. The front-entry wiring makes it possible to connect copper conductors. The two jumper slots enable potential distribution to other clamping points. This product is designed for specific Ex applications (please refer to the product datash



Electrical data			
Ratings per	IEC/	EN 60947-	7-1
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	800 V	-	-
Rated impulse withstand voltage	8 kV	-	-
Rated current	76 A	-	-
Current at conductor cross-section (max.) mm <sup>2</sup>	90 A	-	-

Ratings per IEC/EN – Notes	
Rated current (note)	15 mm high DIN-35 rails shall be used for a current load higher than 76 A!

Approvals per	UL 1059		
Use group	В	С	D
Rated voltage	600 V	600 V	-
Rated current	85 A	85 A	-

Approvals per	CS	A 22.2 No 15	58
Use group	В	С	D
Rated voltage	600 V	600 V	-
Rated current	80 A	80 A	-

Ex information	
Reference hazardous areas	See application instructions in section "Knowledge and Downloads – Documentation – Additio- nal Information: Technical Section; Tech- nical Explications"
Ratings per	ATEX: PTB 05 ATEX 1031 U / IECEx: PTB 05.0015U (Ex eb IIC Gb)
Rated voltage EN (Ex e II)	550 V
Rated current (Ex e II)	70 A
Rated current (Ex e II) with jumper	67 A
rated carrent (Ex o ii) With jumper	0771

Power Loss	
Power loss, per pole (potential)	2.4259 W
Rated current $I_N$ for specified power loss	76 A
Resistance value for specified, current-dependent power loss	0.00042 Ω

Connection data	
Clamping units	2
Total number of potentials	1
Number of levels	1
Number of jumper slots	2

Connection 1	
Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	16 mm²
Solid conductor	0.5 16 mm² / 20 6 AWG
Solid conductor; push-in termination	6 16 mm² / 14 6 AWG
Fine-stranded conductor	0.5 25 mm² / 20 4 AWG
Fine-stranded conductor; with insulated ferrule	0.5 16 mm² / 20 6 AWG
Fine-stranded conductor; with ferrule; push-in termination	6 16 mm² / 10 6 AWG
Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.  AWG specifications were converted according to IEC.
Strip length	18 20 mm / 0.71 0.79 inches
Wiring direction	Front-entry wiring

# Data Sheet | Item Number: 2016-1201 https://www.wago.com/2016-1201



Physical data	
Width	12 mm / 0.472 inches
Height	69.8 mm / 2.748 inches
Depth from upper-edge of DIN-rail	36.9 mm / 1.453 inches
Depth	43.5 mm / 1.713 inches

Mechanical data		
Mounting type	DIN-35 rail	
Marking level	Center/side marking	

Material data	
Note (material data)	Information on material and office times and to found have
	<u>Information on material specifications can be found here</u>
Color	gray
Material group	
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	VO
Fire load	0.391 MJ
Weight	22.6 g

nvironmental requirements			
Processing temperature	-35 +85 °C	<b>Environmental Testing (Environmental Testing</b>	ental Conditions)
Continuous operating temperature -60 +105 °C	Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	
		Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-0
	Spectrum/Installation location	Service life test, Category 1, Class A/B	
	Function test with noise-like vibration	Test passed according to Section 8 of the standard	
	Frequency	$f_1 = 5 \text{ Hz to } f_2 = 150 \text{ Hz}$	
	Acceleration	0.101g (highest test level used for all axes)	
		Test duration per axis	10 min.
		Test directions	X, Y and Z axes
		Monitoring for contact faults/interruptions	Passed
		Voltage drop measurement before and after each axis	Passed
		Simulated service life test through incre ased levels of noise-like vibration	Test passed according to Section 9 of the standard
		Frequency	$f_1 = 5 \text{ Hz to } f_2 = 150 \text{ Hz}$
		Acceleration	0.572g (highest test level used for all axes)
		Test duration per axis	5 h
		Test directions	X, Y and Z axes
		Extended test scope: Monitoring for cor tact faults/interruptions	- Passed
	Extended test scope: Voltage drop measurement before and after each axis	Passed	
		Shock test	Test passed according to Section 10 of the standard
		Shock form	Half sine
		Acceleration	5g (highest test level used for all axes)
	Shock duration	30 ms	

https://www.wago.com/2016-1201



Environmental Testing (Environmental Conditions)		
Number of shocks per axis	3 pos. und 3 neg.	
Test directions	X, Y and Z axes	
Extended test scope: Monitoring for contact faults/interruptions	Passed	
Extended test scope: Voltage drop measurement before and after each axis	Passed	
Vibration and shock stress for rolling stock equipment	Passed	

Commercial data	
Product Group	22 (TOPJOB S)
PU (SPU)	20 pcs
Packaging type	Вох
Country of origin	DE
GTIN	4017332076494
Customs tariff number	85369010000

Product classification	
UNSPSC	39121410
eCl@ss 10.0	27-14-11-20
eCl@ss 9.0	27-14-11-20
ETIM 9.0	EC000897
ETIM 8.0	EC000897
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

## Approvals / Certificates

#### General approvals







Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2 No. 158	1579112
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-119271
UL Underwriters Laboratories Inc.	UL 1059	E45172

## Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
ATEX-Attestation of Conformity WAGO GmbH & Co. KG	-	-
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
Railway WAGO GmbH & Co. KG	-	Railway Ready
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

https://www.wago.com/2016-1201



#### Approvals for marine applications





Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	20-HG1941090-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2

#### Approvals for hazardous areas









Approval	Standard	Certificate Name
AEx UL International Germany GmbH c/o Physikalisch Technische Bundesanstalt	UL 60079	E185892 (AEx eb IIC resp. Ex eb IIC)
ATEX Physikalisch Technische Bundesanstalt (PTB)	EN 60079	PTB 05 ATEX 1031 U (II 2 G Ex eb IIC Gb bzw. I M2 Ex eb I Mb)
CCC CQST/CNEx	GB/T 3836.3	2020312313000162 (Ex eb IIC Gb, Ex eb I Mb)
IECEx Physikalisch Technische Bundesanstalt (PTB)	IEC 60079	IECEx PTB 05.0015 U (Ex eb IIC Gb and Ex eb I Mb)
INMETRO TÜV Rheinland do Brasil Ltda.	IEC 60079	TÜV 12.1313 U

## Downloads **Environmental Product Compliance** Compliance Search **Environmental Product** Compliance 2016-1201

Documentation			
Bid Text			
2016-1201	17.04.2019	xml 4.17 KB	$\underline{\downarrow}$
2016-1201	15.04.2019	docx 14.93 KB	$\underline{\downarrow}$

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 2016-1201	EPLAN Data Portal 2016-1201
	WSCAD Universe 2016-1201
	ZUKEN Portal 2016-1201



#### 1 Compatible Products

#### 1.1 Required Accessories

#### 1.1.1 End plate

#### 1.1.1.1 End plate







Item No.: 2016-1291

End and intermediate plate; 1 mm thick; gray

#### Item No.: 2016-1292

End and intermediate plate; 1 mm thick; orange

#### Item No.: 209-191

Separator for Ex e/Ex i applications; 3 mm thick; 120 mm wide; orange

#### 1.2 Optional Accessories

#### 1.2.1 Cover

#### 1.2.1.1 Cover



#### Item No.: 2016-100

Finger guard; touchproof cover protects unused conductor entries; yellow

#### 1.2.2 DIN-rail

#### 1.2.2.1 Mounting accessories



#### Item No.: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



#### Item No.: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

#### Item No.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



#### Item No.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

## Item No.: 210-115

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

#### Item No.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

#### Item No.: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

#### 1.2.3 Ferrule

### 1.2.3.1 Ferrule

Item No.: 216-284



## Item No.: 216-289

Ferrule; Sleeve for 10 mm² / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



#### Item No.: 216-210

Ferrule; Sleeve for 16 mm² / AWG 6; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



#### Item No.: 216-286

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

sulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; in-



#### Item No.: 216-287

Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

#### Item No.: 216-288

Ferrule; Sleeve for 6 mm<sup>2</sup> / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow



https://www.wago.com/2016-1201



#### 1.2.4 Installation

#### 1.2.4.1 Cover



#### Item No.: 709-156

Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

#### 1.2.4.2 Cover carrier



#### Item No.: 709-169

Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

#### 1.2.5 Jumper

#### 1.2.5.1 Jumper

Item No.: 2016-402





Jumper; 2-way; insulated; light gray



Item No.: 2016-433

Jumper; from 1 to 3; insulated; light gray





Item No.: 285-430

Item No.: 2016-434

2016/2010 series; insulated; gray



Jumper; 3-way; insulated; light gray

Item No.: 2016-404

Jumper; 4-way; insulated; light gray



Item No.: 2016-435

Jumper; from 1 to 5; insulated; light gray



Jumper; 5-way; insulated; light gray



Item No.: 2016-405/011-000

Star point jumper; 3-way; insulated; light gray





ries; insulated; light gray

Step-down jumper; from 285 (35mm²) to

# 1.2.6 Marking

#### 1.2.6.1 Group marker carrier







Item No.: 2009-191

Group marker carrier; gray

Item No.: 2009-192

Group marker carrier; gray

Item No.: 2009-193

Group marker carrier; gray

https://www.wago.com/2016-1201



#### 1.2.6.2 Marker

#### Item No.: 2009-145/000-006

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

#### Item No.: 2009-145/000-007

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

#### Item No.: 2009-145/000-023

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

#### Item No.: 2009-145/000-012

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

#### Item No.: 2009-145/000-005

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

#### Item No.: 2009-145/000-024

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

#### Item No.: 2009-145/000-002

Item No.: 248-501/000-017

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; vellow



#### Item No.: 248-501/000-006

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue



Item No.: 248-501/000-005


Item No.: 248-501/000-007

Mini-WSB marking card; as card; not

Mini-WSB marking card; as card; not

#### Item No.: 248-501/000-023


Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green





#### Item No.: 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange



#### Item No.: 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

#### Item No.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



#### Item No.: 248-501/000-002

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

#### Item No.: 793-5501/000-006

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; blue

# Item No.: 793-5501/000-007

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; gray

#### Item No.: 793-5501/000-023

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; green



#### Item No.: 793-5501/000-017

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; light green

#### Item No.: 793-5501/000-012

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; orange

#### Item No.: 793-5501/000-005

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; red

#### Item No.: 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; violet



#### Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; white

#### Item No.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; yellow

#### Item No.: 793-501/000-006

WMB marking card; as card; not stretchable; plain; snap-on type; blue

#### Item No.: 793-501/000-007

WMB marking card; as card; not stretchable; plain; snap-on type; gray



#### Item No.: 793-501/000-023

Item No.: 793-501/000-024

ble; plain; snap-on type; violet

WMB marking card; as card; not stretchable; plain; snap-on type; green

# Item No.: 793-501/000-017

WMB marking card; as card; not stretcha-

ble; plain; snap-on type; light green

WMB marking card; as card; not stretcha-





#### Item No.: 793-501/000-012

ble; plain; snap-on type; orange



WMB marking card; as card; not stretcha-



#### Item No.: 793-501 WMB marking card; as card; not stretcha-

ble; plain; snap-on type; white

## Item No.: 793-501/000-002

WMB marking card; as card; not stretchable; plain; snap-on type; yellow

# Item No.: 2009-115/000-006

ble; plain; snap-on type; red

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



# Item No.: 2009-115/000-007

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



#### Item No.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



WMB-Inline; for Smart Printer; 1500 piesnap-on type; violet

#### Item No.: 2009-115/000-023 WMB-Inline; for Smart Printer; 1500 pie-

ces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

#### Item No.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

#### Item No.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



ces on roll; stretchable 5 - 5.2 mm; plain;

#### Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

https://www.wago.com/2016-1201



#### 1.2.6.3 Marker carrier



Item No.: 2009-198 Adaptor; gray

#### 1.2.6.4 Marking strip



#### Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

#### 1.2.7 Protective warning marker

#### 1.2.7.1 Cover



#### Item No.: 2016-115

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

#### 1.2.8 Screwless end stop

#### 1.2.8.1 Mounting accessories





#### Item No.: 249-117

Screwless end stop; 10 mm wide; for DINrail 35 x 15 and 35 x 7.5; gray

#### Item No.: 249-116

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

#### 1.2.9 Test and measurement

#### 1.2.9.1 Testing accessories







Item No.: 2009-174

#### .

Item No.: 2009-182

### Item No.: 2016-511

Modular TOPJOB®S connector; modular; for jumper contact slot; 1-pole; gray

#### Item No.: 2016-549

Spacer module; modular; e.g., for bridging commoned terminal blocks; gray

# Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray

# Testing tap; for max. 2.5 mm²; tool-free connection for individual test wires 0.08 - 2.5 mm; gray

#### 1.2.10 Tool

#### 1.2.10.1 Operating tool



#### Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured



#### **Installation Notes**

#### Conductor termination



#### All conductor types at a glance



# Inserting a conductor via push-in termination.

Solid conductors with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.



#### Removing a solid conductor.

Conductor removal is performed with an operating tool, just like CAGE CLAMP®.



#### Inserting a conductor via operating tool.

Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool.

#### The smart feature:

To open the clamp, the operating tool is inserted vertically. The conductor entry is less than 15 degrees for easier wiring.

#### Commoning



Insert push-in type jumper bar and push down until it hits backstop.



#### Removing a push-in type jumper bar:

Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper.

Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.

#### Commoning



This star point jumper has been specially developed to create a "star point" and is used on motor terminal boards equipped with Rail-Mount Terminal Blocks TOPJOB® S.

# W/AGO

#### Commoning



Step-down jumpers common terminal blocks of different sizes, without losing a conductor clamping point. This can be beneficial on long conductor runs where voltage drop can be a problem. A large conductor can be easily connected to smaller conductors at the distribution point.

Commoning may be made in either direction using the special thin end plate to cover the open side. Additional through terminal blocks having a smaller cross-section may be commoned using push-in type jumper bars.



**Using step-down jumpers,** an end plate must be inserted between the terminal blocks to be commoned.



**Step-down jumper (Item No. 2006-499)** commons 6/4 mm² (10/12 AWG) terminal blocks (2006/2004 Series) with 4/2.5/1.5 mm² (AWG 12/14/16) terminal blocks (2004/2002/2001 Series).




**Step-down jumper (Item No. 2016-499)** commons 16/10 mm² (16/8 AWG) terminal blocks (2016/2010 Series) with 10/6/4/2.5 mm² (8/10/12/14 AWG) terminal blocks (2010/2006/2004/2002 Series).



# Stepping down via push-in type jumper bar:

Commoning via open terminal side with end plate allows jumpering over two cross-section sizes for 16 mm² (6 AWG) and 10 mm² (8 AWG) and one cross-section size for 6/4/2.5 mm² (10/12/14 AWG). An example: from 16 mm² (6 AWG) to 6 mm² (10 AWG) (see illustration above) or from 10 mm² (8 AWG) to 4 mm² (12 AWG).



# Stepping down via push-in type jumper bar:

Commoning via closed terminal side with end plate allows jumpering over two cross-section sizes, e.g., from 16 mm<sup>2</sup> (6 AWG) to 6 mm<sup>2</sup> (10 AWG) or from 6 mm<sup>2</sup> (10 AWG) to 2.5 mm<sup>2</sup> (14 AWG) (see illustration above).



#### Note:

The total current of the outgoing circuits must not exceed the nominal current of the step-down jumper/push-in type jumper bar.

#### **Testing**



The modular TOPJOB® S connectors also connect conductors of the same size as the terminal blocks being used.



TOPJOB® S Connectors with a 2 mm  $\emptyset$  test socket for testing voltage via 2-pole voltage tester



Rail-mount terminal block assembly for electric motor wiring



Test plug adapter (Item No. 2009-174, CAT I) for 4 mm Ø plugs – compatible with 2000 to 2016 Series



Testing tap (Item No. 2009-182) for toolfree connection of test cables up to 2.5 mm² (12 AWG) – compatible with 2000 to 2016 Series

https://www.wago.com/2016-1201



#### Marking



Snapping WMB Inline markers into marker slots.



DPJOB® S 2009-193 Group Mer (equipped with a marking s

TOPJOB® S 2009-193 Group Marker Carrier (equipped with a marking strip) for all 2001 to 2016 Series TOPJOB® S Rail-Mount Terminal Blocks
Do not use on an end plate!

#### Ex application



Through terminal blocks with a blue insulated housing are suitable for Ex i applica-



All through and ground conductor terminal blocks are suitable for Ex e II applications



# Separator plate for Ex e/Ex i applications

An end plate must be applied to the terminal block located directly behind an Ex e/ Ex i separator plate.



## Ex e II/Ex i terminal strip

The movable feet of terminal blocks and separator plates must face the same direction.



A separator plate is located between the Ex e II and Ex i terminal strip.
End plate
Ex e II terminal blocks
Separator plate for Ex e/Ex i applications
End plate
Ex i terminal blocks
According to EN 50020, a minimum distance of 50 mm must be kept between live parts of Ex e/Ex i separators is a space-saving solution when Ex e and Ex i terminal blocks are mounted on a common DIN-

#### Cover



Finger guard seals an unused conductor entry

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at::  $\underline{www.wago.com}$