


# 11.5kW 3-Phase Local Metered PDU, 208-240V Outlets (36 C13 & 9 C19), L22-20P 360-415V Input, 6 ft. (1.83 m) Cord, 0U Vertical, TAA

MODEL NUMBER: PDU3XMV6L2220

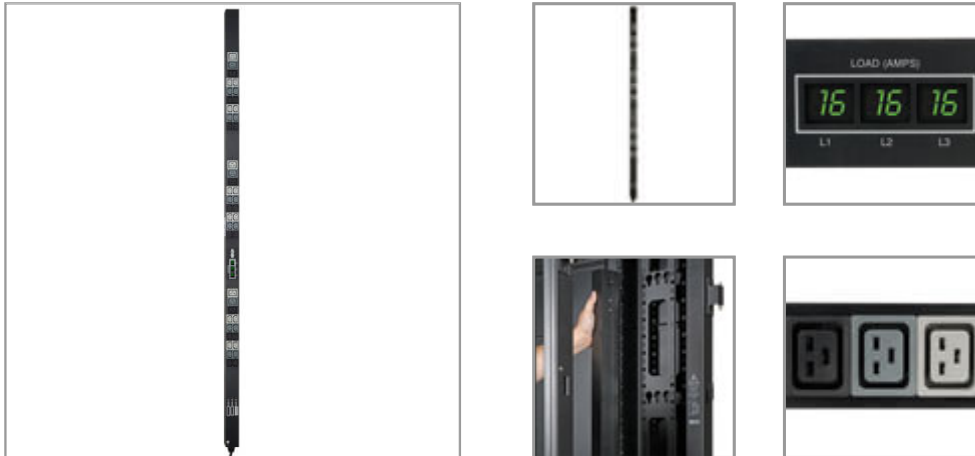

## Features

- 11.5 kW Local Metered Power Distribution Unit (PDU)
- 360-415V input with NEMA L22-20P 3-phase input connection
- 208-240V output with 36 C13 & 9 C19 single phase output receptacles
- 0U / 1778mm vertical rackmount installation supported
- Outlets are arranged in 3 local metered 15 outlet load banks
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

## Highlights

- Local metered 11.5kW 3-Phase 360-415V input / 208-240V output PDU
- Set of 3 digital meters report output load level per phase in amps
- 70in / 1778mm 0U vertical format, toolless button-mount installation
- NEMA L22-20P 3 phase input; 6ft 1.8m line cord
- 36 C13 & 9 C19 single phase outlets; Included cord retention brackets
- TAA Compliant

## Package Includes

- Local Metered rackmount PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual

## Specifications

OVERVIEW	
UPC Code	037332171955
PDU Type	Local Metered
INPUT	
PDU Input Voltage	360-415V
Recommended Electrical Service	Three-phase 20A 360-415V service
Maximum Input Amps	16



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

Maximum Input Amps Details	Agency de-rated to 16A continuous
PDU Plug Type	NEMA L22-20P
Input Phase	3-Phase
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
<b>OUTPUT</b>	
Output Capacity Details	11.5kW (415/240V), 11kW (400/230V), 10.6kW (380/220V), 10kW (360/208V) total capacity; 16A max per output phase (L1-L2, L2-L3, L3-L1); 16A max per C19 outlet; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(36) C13; (9) C19
Output Nominal Voltage	208-240V
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Reported Load Segments	Supports local monitoring of current for each output phase (16A balanced max per output load banks L1, L2 & L3); Outlets are color-coded and labeled for easy phase and load bank identification; L1-N feeds black outlets; L2-N feeds dark-gray outlets; L3-N feeds light-gray outlets
Front Panel LCD Display	Set of 3 digital meters report per-phase output current in amps (L1, L2, L3)
<b>SURGE / NOISE SUPPRESSION</b>	
Automatic Shut-Off	No
<b>PHYSICAL</b>	
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / cm)	12.95 x 17.02 x 193.04
Shipping Dimensions (hwd / in.)	5.10 x 6.70 x 76.00
Shipping Weight (kg)	5.22
Shipping Weight (lbs.)	11.50
Unit Dimensions (hwd / in.)	70 x 2.2 x 1.93
Unit Dimensions (hwd / cm)	177.8 x 5.6 x 4.9
Unit Weight (lbs.)	8.00
Unit Weight (kg)	3.63
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	0C ~ 40C (32F ~ 104F)
Storage Temperature Range	-30°C to +50°C (-22°F to +122°F)



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Relative Humidity	5-95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>