## Safety Interlock Switches



Rev. 12.10

## **Guard Lock Safety-Door Switch**

- · Vertically mounting guard lock safety-door switch ideal for limited installation space
- Selectable operation key insertion direction
- Slim safety-door switch with an electromagnetic lock or unlock mechanism
- · Built-in switches with multiple-contact construction are available
- A key holding force of 1,000 N minimum
- Can be used for either standard loads or microloads
- Lineup includes models with a conduit size of M20
- · Variety of metallic heads available













### **Specifications**

#### Standards and EC Directives

#### Conforms to the following EC Directives:

- · Machinery Directive
- Low Voltage Directive
- EN 1088
- EN 60204-1
- GS-ET-19

#### **Certified Standards**

| Certification body | Standard                                   | File No.                                 |
|--------------------|--|--|
| TÜV SÜD            | EN 60947-5-1<br>(certified direct opening) | Consult your representative for details. |
| UL *1              | UL 508, CSA C22.2 No.14                    | E76675                                   |
| CQC (CCC)          | GB14048.5                                  | 2003010305064264                         |
| KOSHA *2           | EN60947-5-1                                | 2007-26                                  |

<sup>\*1.</sup> Certification for CSA C22.2 No. 14 is authorized by the UL mark.

### **Certified Standard Ratings**

TÜV (EN 60947-5-1), CCC (GB14048.5)

| Item Utilization category    | AC-15  | DC-13  |
|------------------------------|--------|--------|
| Rated operating current (Ie) | 0.75 A | 0.27 A |
| Rated operating voltage (Ue) | 240 V  | 250 V  |

Note: Use a 10 A fuse type gl or gG that conforms to IEC 60269 as a shortcircuit protection device.

#### UL/CSA (UL 508, CSA C22.2 No. 14) C300

| Rated   | Carry           | Curre | nt (A) | Volt-amp | eres (VA) |
|---------|-----------------|-------|--------|----------|-----------|
| voltage | voltage current |       | Break  | Make     | Break     |
| 120 VAC | 2.5 A           | 15    | 1.5    | 1.000    | 100       |
| 240 VAC |                 | 7.5   | 0.75   | 1,800    | 180       |

#### Q300

| Rated Carry |         | Curre | nt (A) | Volt-amperes (VA) |       |
|-------------|---------|-------|--------|-------------------|-------|
| voltage     | current | Make  | Break  | Make              | Break |
| 125 VDC     | 2.5 A   | 0.55  | 0.55   | 00                | 00    |
| 250 VDC     |         | 0.27  | 0.27   | 69                | 69    |

#### **Solenoid Coil Characteristics**

| Item -                            | Гуре | 24 VDC               |  |
|-----------------------------------|------|----------------------|--|
| Rated operating voltage (100% ED) |      | 24 VDC ±10%          |  |
| Current consumption               |      | Approx.<br>200 mA    |  |
| Insulation Class                  |      | Class F (130°C max.) |  |

#### **Indicator Characteristics**

| Item Ty             | ре | LED          |
|---------------------|----|--------------|
| Rated voltage       |    | 24 VDC       |
| Current consumption |    | Approx. 3 mA |
| Color (LED)         |    | Orange/Green |



<sup>\*2.</sup>Only certain models have been certified.

### **Connections**

#### **Contact Form**

Indicates conditions where the Key is inserted and the lock is applied. Terminals 12 and 41 are connected internally (as per BIA GS-ET-19).

| Model          | Contact<br>(door open/closed<br>detection and lock | Contac<br>Door open/<br>closed                         | Lock                         | Operating pattern  | Remarks  |
|----------------|--|--|------------------------------|--|--|
|                | monitor)   | detection  Door open/                                  | monitor  Lock monitor        | Lock position  | Only NC contact 11-12  |
| D4GL-□AF□-□    | 1NC/1NO + 1NC/1NO                                  | closed detection<br>Zb                                 | Zb 42 53 54                  | 11-42 33-34 53-54 Stroke Operation Key insertion Extraction completion                               | has a certified direct opening mechanism.  The terminals 11-42, 33-34, and 53-54 can                                   |
|                |  |  |                              | completion position position  Lock position  | be used as unlike poles.  Only NC contact 11-12,   |
| D4GL-□BF□-□    | 1NC/1NO + 2NC                                      | Door open/<br>closed detection<br>Zb<br>11 12<br>33 34 | Lock monitor  Zb 41 42 51 52 | 11-42 33-34 51-52 Stroke Operation Key insertion completion position  Extraction completion position | has a certified direct opening mechanism. The terminals 11-42, 33-34, and 51-52 can be used as unlike poles.           |
| D4GL-□CF□-□    | 2NC + 1NC/1NO                                      | Door open/closed detection Zb                          | Lock monitor  Zb 41 42 53 54 | Lock position  11-42 21-22 53-54 Stroke Operation Key insertion Extraction completion                | Only NC contacts 11-12 and 21-22 have a certified direct opening mechanism.  The terminals 11-42, 21-22, and 53-54 can |
|                |  |  |                              | completion position position  Lock position  | be used as unlike poles.  Only NC contacts 11-12   |
| D4GL-□DF□-□    | 2NC + 2NC  | Door open/ closed detection Zb 11 12                   | Lock monitor  Zb  41  42     | 11-42<br>21-22 ON  | and 21-22 have a certified direct opening mechanism.   |
| D4QL-LDI LI-LI | ZINC + ZINC  | 21 22  |                              | 51-52 Stroke — Extraction completion completion position   | The terminals 11-42,<br>21-22, and 51-52 can<br>be used as unlike poles.   |
| D4GL-□EF□-□    | 2NC/1NO + 1NC/1NO                                  | Door open/<br>closed detection<br>Zb                   | Lock monitor Zb 41 42        | Lock position  11-42 21-22 33-34  ON   | Only NC contacts 11-12 and 21-22 have a certified direct opening mechanism.  |
|                |  | 21 22 33 34  | 53 54                        | Stroke  Operation Key insertion  | The terminals 11-42, 21-22, 33-34, and 53-54 can be used as unlike poles.  |
|                | 000/40/0 - 00/0                                    | Door open/<br>closed detection<br>Zb                   | Lock monitor Zb 41 42        | Lock position  11-42 21-22 33-34   | Only NC contacts 11-12<br>and 21-22 have a<br>certified direct opening<br>mechanism.                                   |
| D4GL-□FF□-□    | 2NC/1NO + 2NC                                      | 21 22 33 34  | 51 52                        | 51-52 Stroke Operation Key insertion completion position Extraction completion position              | The terminals 11-42,<br>21-22, 33-34, and 51-52<br>can be used as unlike<br>poles.                                     |
| DAOL FOED F    | 000 - 400/400                                      | Door open/<br>closed detection<br>Zb                   | Lock monitor  Zb 41 42       | Lock position  11-42 21-22 31-32   | Only NC contacts 11-12, 21-22, and 31-32 have a certified direct opening mechanism.                                    |
| D4GL-□GF□-□    | 3NC + 1NC/1NO                                      | 21 22 32   | 53 54                        | Stroke Operation Key insertion completion position  Stroke  Extraction completion position           | The terminals 11-42,<br>21-22, 31-32, and 53-54<br>can be used as unlike<br>poles.                                     |
|                | 000 000  | Door open/<br>closed detection<br>Zb                   | Lock monitor Zb 41 42        | Lock position  11-42 21-22 31-32   | Only NC contacts 11-12, 21-22, and 31-32 have a certified direct opening mechanism.                                    |
| D4GL-□HF□-□    | 3NC + 2NC  | 21 22 32 32  | 51 52                        | 51-52 Stroke Extraction completion position  | The terminals 11-42,<br>21-22, 31-32, and 51-52<br>can be used as unlike<br>poles.                                     |







G

### **Switches**



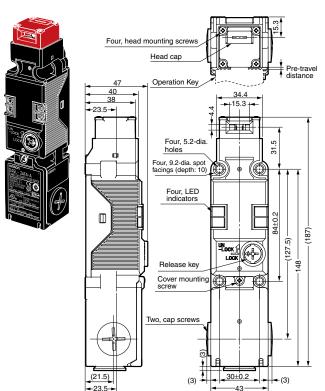



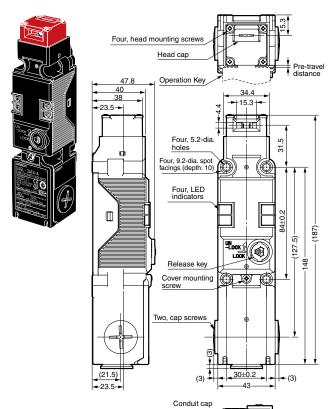


| Operating characteristics                      | D4GL-□□□-A             |  |
|--|------------------------|--|
| Key insertion force<br>Key extraction<br>force | 15 N max.<br>40 N max. |  |
| Pre-travel distance                            | 10 mm max.             |  |
| Movement before being locked                   | 4 mm min.              |  |

Conduit cap

|  |                        | 1 |
|--|------------------------|---|
| Operating characteristics                      | D4GL-□□□□-A4           |   |
| Key insertion force<br>Key extraction<br>force | 15 N max.<br>40 N max. |   |
| Pre-travel distance                            | 10 mm max.             |   |
| Movement before being locked                   | 4 mm min.              |   |

### **Operation Keys**

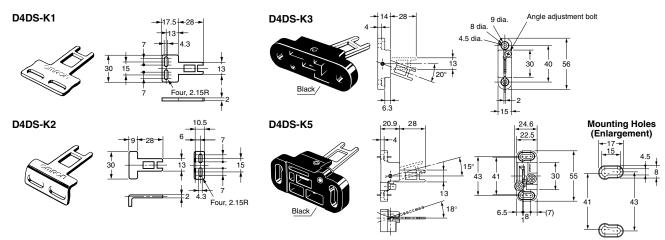

Note: Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions.






OMRON


### With Operation Key Inserted

D4GL + D4DS-K1 (with Front-inserted Operation Key)

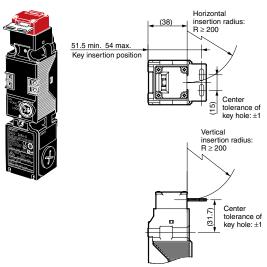


D4GL + D4DS-K1 (with Top-inserted Operation Key)



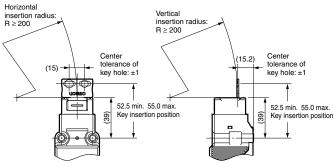


D4GL + D4DS-K2 (with Front-inserted Operation Key)

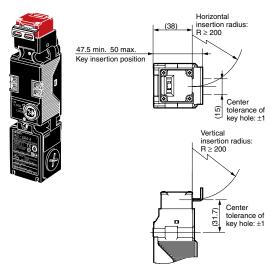

D4GL + D4DS-K2 (with Top-inserted Operation Key)



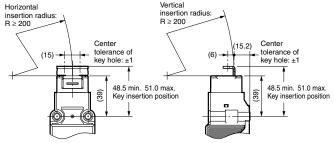






G

(mm)

### **Dimensions and Operating Characteristics (continued)**


### With Operation Key Inserted

D4GL + D4DS-K3 (with Front-inserted Operation Key)

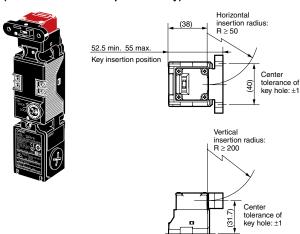


D4GL + D4DS-K3 (with Top-inserted Operation Key)



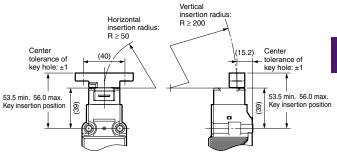


D4GL + D4DS-K5 (with Front-inserted Operation Key)

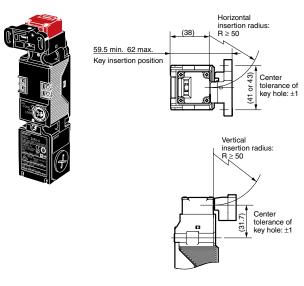


D4GL + D4DS-K5 (with Top-inserted Operation Key)



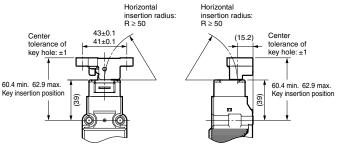

### **Application Examples**

# G9SA-321-T + D4GL-□AFA-□ (Mechanical Lock Type) Circuit Diagram (Manual Reset)

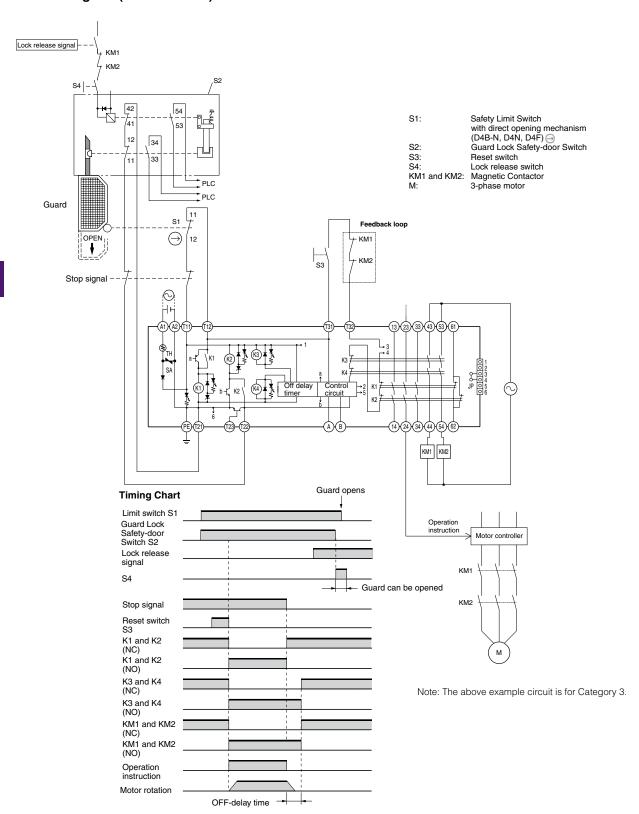





Downloaded from Arrow.com.

### **Ordering**

#### **Model Number Structure**

#### **Switch**

- Conduit Size
  - 1: Pg13.5
  - 2: G1/2
  - 4: M20
- Built-in Switch (with Door Open/Closed Detection Switch and Lock Monitor Switch Contacts)
  - A: 1NC/1NO (slow-action contacts) + 1NC/1NO (slow-action contacts)
  - B: 1NC/1NO (slow-action contacts) + 2NC (slow-action contacts)
  - C: 2NC (slow-action contacts) + 1NC/1NO (slow-action contacts)
  - D: 2NC (slow-action contacts) + 2NC (slow-action contacts)
  - E: 2NC/1NO (slow-action contacts) + 1NC/1NO (slow-action contacts)
  - F: 2NC/1NO (slow-action contacts) + 2NC (slow-action contacts)
  - G: 3NC (slow-action contacts) + 1NC/1NO (slow-action contacts)
  - H: 3NC (slow-action contacts) + 2NC (slow-action contacts)
- 3 Head Mounting Direction and Material
  - F: Four mounting directions possible (Front-side mounting at shipping)/plastic
  - D: Four mounting directions possible (Front-side mounting at shipping)/metal
- Open Door Lock and Release
  - A: Mechanical lock/24 VDC solenoid release
  - G: 24 VDC solenoid lock/mechanical release
- 6 Indicator
  - A: 24 VDC (orange/green LED indicator)
- 6 Release Key Type

Blank: Standard release key

- 4: Special Release Key
- NPT, 1/2"-14 NPT Conduit

Adapter included

(Applicable to M20 Conduit models only)

Note: To specify 1/2" NPT adapter, add "-NPT" to end of model code.

### **Operation Key**

D4DS-K □



- Operation Key Type
  - 1: Horizontal mounting
  - 2: Vertical mounting
  - 3: Adjustable mounting (horizontal)
  - 5: Adjustable mounting (horizontal/vertical)

| Туре                                      | Model   |
|---|---------|
| Horizonal mounting                        | D4DS-K1 |
| Vertical mounting                         | D4DS-K2 |
| Adustable mounting (horizontal)           | D4DS-K3 |
| Adjustable mounting (horizontal/vertical) | D4DS-K5 |

### **Special Release Key**

| Туре  | Model   |
|---|---------|
| Special Release Key<br>for D4GL, D4JL, D4NL,<br>and D4SL Switches | D4NL-RK |

= Highlighted Rapid Delivery products are available for shipment today or within FIVE days.



For information on the D4GL-SK10-LK Slide Key, see www.sti.com



### **Ordering (continued)**

### **List of Models**

Switches with certified direct opening mechanisms (Operation Keys are sold separately)

| Head<br>Material | Release Key<br>Type | Solenoid<br>Voltage/Indicator         | Lock and Release<br>Types | Contact Configuration (door open/closed detection switch and lock monitor switch contacts) (slow action) Certified direct opening NC contact | Conduit size                 | Model           |
|------------------|---------------------|---------------------------------------|---------------------------|--|------------------------------|-----------------|
|                  |                     |                                       |                           |  | M20                          | D4GL-4AFA-A     |
|                  |                     |                                       |                           | 1NC/1NO+1NC/1NO  | M20 with 1/2"<br>NPT adaptor | D4GL-4AFA-A-NPT |
|                  |                     |                                       |                           |  | M20                          | D4GL-4BFA-A     |
|                  |                     |                                       |                           | 1NC/1NO+2NC  | M20 with 1/2"<br>NPT adaptor | D4GL-4BFA-A-NPT |
|                  |                     |                                       |                           |  | M20                          | D4GL-4CFA-A     |
|                  |                     |                                       |                           | 2NC+1NC/1NO  | M20 with 1/2"<br>NPT adaptor | D4GL-4CFA-A-NPT |
|                  |                     |                                       |                           | 0110 0110  | M20                          | D4GL-4DFA-A     |
|                  |                     |                                       | Mechanical lock           | 2NC+2NO  | M20 with 1/2"<br>NPT adaptor | D4GL-4DFA-A-NPT |
|                  |                     |                                       | Solenoid Release          | 2NC/1NO+1NC/1NO  | M20                          | D4GL-4EFA-A     |
|                  |                     |                                       |                           | 2NG/ 1NO+ 1NG/ 1NO   | M20 with 1/2"<br>NPT adaptor | D4GL-4EFA-A-NPT |
|                  |                     |                                       |                           | 2NC/1NO+2NC  | M20<br>M20 with 1/2"         | D4GL-4FFA-A     |
|                  |                     |                                       |                           | ZIVO/ IIVO I ZIVO  | NPT adaptor                  | D4GL-4FFA-A-NPT |
|                  |                     |                                       |                           |  | M20                          | D4GL-4GFA-A     |
|                  |                     |                                       |                           | 3NC+1NC/1NO  | M20 with 1/2"<br>NPT adaptor | D4GL-4GFA-A-NPT |
|                  |                     |                                       |                           | 210 210  | M20                          | D4GL-4HFA-A     |
| Plastic          | Standard            | Solenoid: 24 VDC<br>Orange/Green LED: |                           | 3NC+2NC  | M20 with 1/2"<br>NPT adaptor | D4GL-4HFA-A-NPT |
|                  |                     | 24 VDC                                |                           | 10/0/10/0 : 10/0/10/0  | M20                          | D4GL-4AFG-A     |
|                  |                     |                                       |                           | 1NC/1NO+1NC/1NO  | M20 with 1/2"<br>NPT adaptor | D4GL-4AFG-A-NPT |
|                  |                     |                                       |                           | 1NC/1NO+2NC  | M20<br>M20 with 1/2"         | D4GL-4BFG-A     |
|                  |                     |                                       |                           |  | NPT adaptor                  | D4GL-4BFG-A-NPT |
|                  |                     |                                       |                           |  | M20                          | D4GL-4CFG-A     |
|                  |                     |                                       |                           | 2NC+1NC/1NO  | M20 with 1/2"<br>NPT adaptor | D4GL-4CFG-A-NPT |
|                  |                     |                                       |                           | 2010 - 2010  | M20                          | D4GL-4DFG-A     |
|                  |                     |                                       | Solenoid lock             | 2NC+2NO  | M20 with 1/2"<br>NPT adaptor | D4GL-4DFG-A-NPT |
|                  |                     |                                       | Mechanical Release        | 2NC/1NO+1NC/1NO  | M20<br>M20 with 1/2"         | D4GL-4EFG-A     |
|                  |                     |                                       |                           | 2110/111071110/1110  | NPT adaptor                  | D4GL-4EFG-A-NPT |
|                  |                     |                                       |                           | 2NC/1NO+2NC  | M20<br>M20 with 1/2"         | D4GL-4FFG-A     |
|                  |                     |                                       |                           | 2.10,  | NPT adaptor                  | D4GL-4FFG-A-NPT |
|                  |                     |                                       |                           |  | M20                          | D4GL-4GFG-A     |
|                  |                     |                                       |                           | 3NC+1NC/1NO  | M20 with 1/2"<br>NPT adaptor | D4GL-4GFG-A-NPT |
|                  |                     |                                       |                           | 0140 0140  | M20                          | D4GL-4HFG-A     |
|                  |                     |                                       |                           | 3NC+2NC  | M20 with 1/2"<br>NPT adaptor | D4GL-4HFG-A-NPT |

= Highlighted **Rapid Delivery** products are available for shipment today or within **FIVE** days.

(Continued on next page)





### **Ordering (continued)**

### **List of Models (continued)**

Switches with certified direct opening mechanisms (Operation Keys are sold separately) (continued)

| Head<br>Material | Release Key<br>Type    | Solenoid<br>Voltage/Indicator                   | Lock and Release<br>Types           | Contact Configuration (door open/closed detection switch and lock monitor switch contacts) (slow action) Certified direct opening NC contact | Conduit size                 | Model            |
|------------------|------------------------|---|-------------------------------------|--|------------------------------|------------------|
| Plastic          | Special<br>Release Key | Solenoid: 24 VDC<br>Orange/Green LED:<br>24 VDC | Mechanical lock<br>Solenoid Release | 1NC/1NO+1NC/1NO  | M20                          | D4GL-4AFA-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4AFA-A4-NPT |
|                  |                        |   |                                     | 1NC/1NO+2NC  | M20                          | D4GL-4BFA-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4BFA-A4-NPT |
|                  |                        |   |                                     | 2NC+1NC/1NO  | M20                          | D4GL-4CFA-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4CFA-A4-NPT |
|                  |                        |   |                                     | 2NC+2NO  | M20                          | D4GL-4DFA-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4DFA-A4-NPT |
|                  |                        |   |                                     | 2NC/1NO+1NC/1NO  | M20                          | D4GL-4EFA-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4EFA-A4-NPT |
|                  |                        |   |                                     | 2NC/1NO+2NC  | M20                          | D4GL-4FFA-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4FFA-A4-NPT |
|                  |                        |   |                                     | 3NC+1NC/1NO  | M20                          | D4GL-4GFA-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4GFA-A4-NPT |
|                  |                        |   |                                     | 3NC+2NC  | M20                          | D4GL-4HFA-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4HFA-A4-NPT |
|                  |                        |   | Solenoid lock<br>Mechanical Release | 1NC/1NO+1NC/1NO  | M20                          | D4GL-4AFG-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4AFG-A4-NPT |
|                  |                        |   |                                     | 1NC/1NO+2NC  | M20<br>M20 with 1/2"         | D4GL-4BFG-A4     |
|                  |                        |   |                                     |  | NPT adaptor                  | D4GL-4BFG-A4-NPT |
|                  |                        |   |                                     | 2NC+1NC/1NO  | M20                          | D4GL-4CFG-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4CFG-A4-NPT |
|                  |                        |   |                                     | 2NC+2NO  | M20<br>M20 with 1/2"         | D4GL-4DFG-A4     |
|                  |                        |   |                                     |  | NPT adaptor                  | D4GL-4DFG-A4-NPT |
|                  |                        |   |                                     | 2NC/1NO+1NC/1NO  | M20                          | D4GL-4EFG-A4     |
|                  |                        |   |                                     |  | M20 with 1/2"<br>NPT adaptor | D4GL-4EFG-A4-NPT |
|                  |                        |   |                                     | 2NC/1NO+2NC  | M20<br>M20 with 1/2"         | D4GL-4FFG-A4     |
|                  |                        |   |                                     |  | NPT adaptor                  | D4GL-4FFG-A4-NPT |
|                  |                        |   |                                     | 3NC+1NC/1NO  | M20<br>M20 with 1/2"         | D4GL-4GFG-A4     |
|                  |                        |   |                                     |  | NPT adaptor                  | D4GL-4GFG-A4-NPT |
|                  |                        |   |                                     | 0140.0140  | M20                          | D4GL-4HFG-A4     |
|                  |                        |   |                                     | 3NC+2NC  | M20 with 1/2"<br>NPT adaptor | D4GL-4HFG-A4-NPT |
| Metal            | Special<br>Release Key | 24 VDC  | Mechanical lock<br>Solenoid Release | 2NC/1NO + 1NC/NO   | M20 with 1/2"<br>NPT adaptor | D4GL-4EDA-A4-NPT |
|                  |                        |   | Solenoid lock<br>Mechanical Release | 3NC+1NC/1NO  |                              | D4GL-4GDG-A4-NPT |
|                  |                        |   |                                     | 2NC/1NO + 1NC/NO   |                              | D4GL-4EDG-A4-NPT |

= Highlighted Rapid Delivery products are available for shipment today or within FIVE days.







OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

**OMRON CANADA, INC. • HEAD OFFICE** 

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

**OMRON ELECTRONICS DE MEXICO • HEAD OFFICE** 

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

**OMRON ARGENTINA • SALES OFFICE** 

Cono Sur • 54.11.4783.5300

**OMRON CHILE • SALES OFFICE** 

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

#### **Automation Control Systems**

- Machine Automation Controllers (MAC) Programmable Controllers (PLC)
- Operator interfaces (HMI) Distributed I/O Software

### **Drives & Motion Controls**

• Servo & AC Drives • Motion Controllers & Encoders

### **Temperature & Process Controllers**

• Single and Multi-loop Controllers

#### **Sensors & Vision**

- Proximity Sensors Photoelectric Sensors Fiber-Optic Sensors
- Amplified Photomicrosensors Measurement Sensors
- Ultrasonic Sensors Vision Sensors

### **Industrial Components**

- RFID/Code Readers Relays Pushbuttons & Indicators
- Limit and Basic Switches Timers Counters Metering Devices
- Power Supplies

#### Safety

• Laser Scanners • Safety Mats • Edges and Bumpers • Programmable Safety Controllers • Light Curtains • Safety Relays • Safety Interlock Switches

C354I-E-01 07/15 Note: Specifications are subject to change.

© 2015 Omron Electronics LLC

Printed in U.S.A.

Printed on recycled paper.