

CTLSH8-60M364

**SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIER**



• Device is **Halogen Free** by design

APPLICATIONS:

- Solar by-pass diode
- OR-ing diode
- DC-DC output rectification
- Reverse polarity protection
- Power management

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage
DC Blocking Voltage
RMS Reverse Voltage
Average Forward Current ($T_L=125^\circ\text{C}$)
Peak Forward Surge Current, $t_p=8.3\text{ms}$
Operating and Storage Junction Temperature
Thermal Resistance
Thermal Resistance



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CTLSH8-60M364 is a high performance 8.0 amp silicon Schottky rectifier designed for applications as a by-pass diode in low profile solar panels.

MARKING CODE: CTLSH86

FEATURES:

- Low forward voltage, $V_F=0.54\text{V MAX @ }8.0\text{A}$
- Low reverse leakage current, $I_R=0.6\text{mA MAX @ }60\text{V}$
- Low profile 1.2mm MAX package height

SYMBOL		UNITS
V_{RRM}	60	V
V_R	60	V
$V_{R(RMS)}$	42	V
I_O	8.0	A
I_{FSM}	200	A
T_J, T_{stg}	-55 to +150	$^\circ\text{C}$
Θ_{JA}	60	$^\circ\text{C/W}$
Θ_{JC}	9.0	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=60\text{V}$		0.1	0.6	mA
I_R	$V_R=60\text{V}, T_A=125^\circ\text{C}$		18		mA
BV_R	$I_R=1.0\text{mA}$	60			V
V_F	$I_F=1.0\text{A}$		0.30	0.35	V
V_F	$I_F=1.0\text{A}, T_A=125^\circ\text{C}$		0.20		V
V_F	$I_F=8.0\text{A}$		0.47	0.54	V
V_F	$I_F=8.0\text{A}, T_A=125^\circ\text{C}$		0.46		V


R3 (5-September 2018)

CTLSH8-60M364


SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIER




TLM364 CASE - MECHANICAL OUTLINE

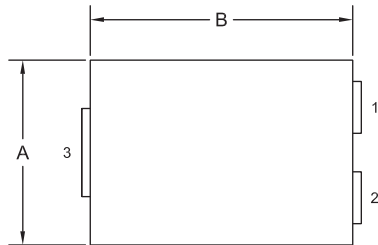

TOP VIEW



SIDE VIEW

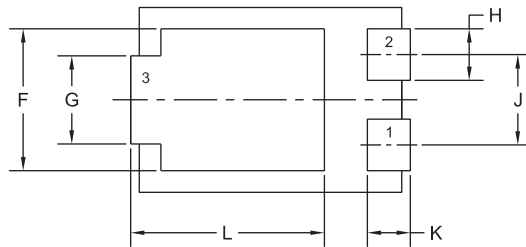


BOTTOM VIEW

R0

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.167	0.172	4.25	4.35
B	0.238	0.243	6.05	6.15
C	0.039	0.048	1.00	1.20
D	0.009	0.014	0.25	0.35
E	0.250	0.262	6.35	6.65
F	0.128	0.136	3.25	3.45
G	0.076	0.085	1.95	2.15
H	0.044	0.052	1.10	1.30
J	0.083		2.10	
K	0.035	0.044	0.90	1.10
L	0.171	0.183	4.35	4.65

TLM364 (REV:R0)

SUGGESTED MOUNTING PADS
(Dimensions in mm)

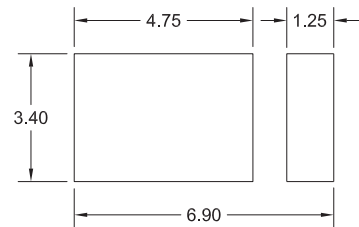

R0

LEAD CODE:

- 1) Anode
- 2) Anode
- 3) Cathode

MARKING CODE: CTLSH86

R3 (5-September 2018)

www.centalsemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms