

Part Number: 5695140921

95 POT CORE SET

Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.

Pot cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

Weight indicated is per pair or set.

Weight: 3.2.000 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	14	±0.30	0.551	—
B	4.2	±0.20	0.165	—
C	9.55	±0.30	0.376	—
D	3.1	±0.20	0.122	—
E	11.8	±0.40	0.465	—
F	5.9	±0.20	0.232	—
G	3.3	±0.60	0.13	—
H	2.9	±0.30	0.114	—

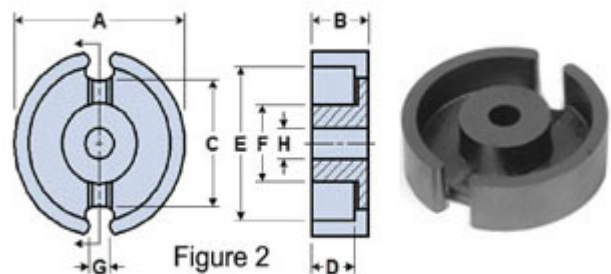



Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L (nH)	2100 ±25%
A_e (cm ²)	0.251
$\Sigma l/A$ (cm ⁻¹)	7.9
l_e (cm)	1.98
V_e (cm ³)	0.495

Electrical Properties	
$A_{\min}(\text{cm}^2)$	0.198

A_L value is measured at 1 kHz, $B < 10$ gauss.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com