

RIGOL



DG1000Z Series Function/Arbitrary Waveform Generator

SiFi

- SiFi (Signal Fidelity) for 100% waveform replication
- 2Mpts or 8Mpts/CH(std.), 16Mpts/CH (opt.) arbitrary waveform length
- Standard 2 full functional independent channels
- ± 1 ppm frequency stability, -125 dBc/Hz phase noise, 200ps low jitter
- Built-in 8 orders harmonics generator
- Built-in 7 digits/s counter up to 200MHz
- 160 built-in pre-edited waveforms
- Intuitive arbitrary waveform editing software
- Full modulation supported: AM, FM, PM, ASK, FSK, PSK and PWM

DG1000Z series function/arbitrary waveform generator is a multi-functional generator that combines many functions in one, including Function Generator, Arbitrary Waveform Generator, Noise Generator, Pulse Generator, Harmonics Generator, Analog/Digital Modulator and Counter. As a multi-functional, high performance and portable generator, it will be a new selection in education, R&D, production, test and etc.

DG1000Z Series Function/Arbitrary Waveform Generator




Dimensions: Width×Height×Depth=261.5mm×112mm×318.4mm
Weight: 3.2kg (without package)

► Feature and Benefits



Standard 2 full functional channels

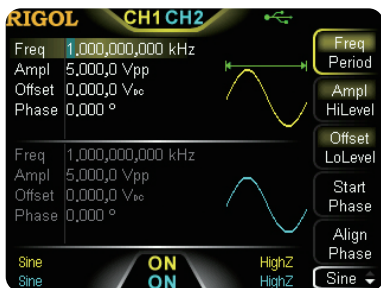


Arbitrary waveform function with innovative SiFi technology



Up to 160 built-in waveforms



Burst function

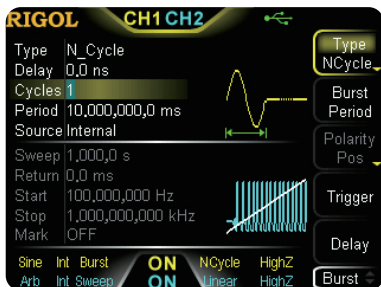


Multiple analog and digital modulations




Sweep function




Standard harmonic generator

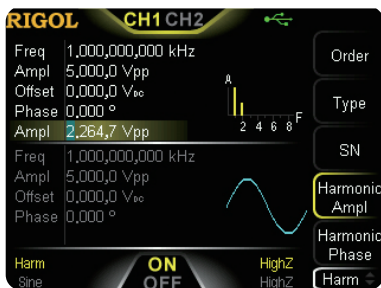


Waveform summing function

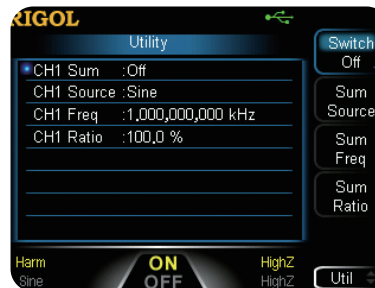

Standard 7 digits/s full function frequency counter with 200MHz bandwidth

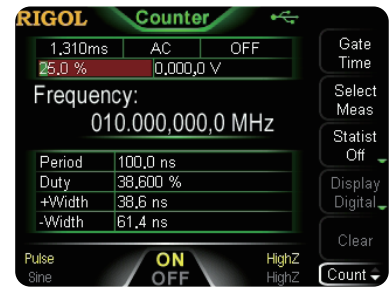


Channels and system setting

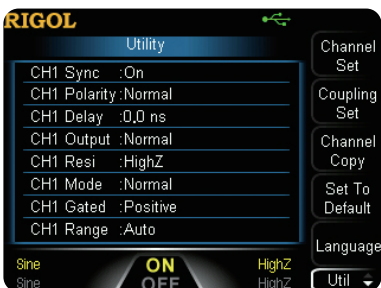

In line with LXI Core 2011 Device



File Management Function

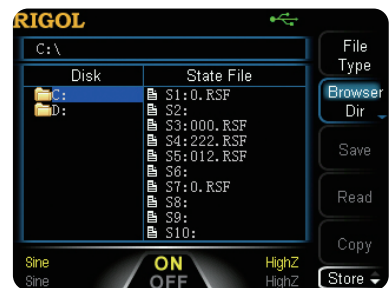

► Specifications

All the specifications can be guaranteed if the following two conditions are met unless where noted.

- The generator is within the calibration period and has performed self-calibration.
 - The generator has been working continuously for at least 30 minutes under the specified temperature (18°C ~ 28°C).
- All the specifications are guaranteed unless those marked with "typical".

Model	DG1022Z	DG1032Z	DG1062Z
Channel	2	2	2
Max Frequency	25 MHz	30 MHz	60 MHz
Sample Rate	200 MSa/s		

Waveform	
Basic Waveform	Sine, Square, Ramp, Pulse, Noise
Built-in Arbitrary Waveform	160 kinds, including Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, Dual-Tone, etc.

Frequency Characteristics			
Sine	1 µHz to 25 MHz	1 µHz to 30 MHz	1 µHz to 60 MHz
Square	1 µHz to 25 MHz	1 µHz to 25 MHz	1 µHz to 25 MHz
Ramp	1 µHz to 500 kHz	1 µHz to 500 kHz	1 µHz to 1 MHz
Pulse	1 µHz to 15 MHz	1 µHz to 15 MHz	1 µHz to 25 MHz
Harmonic	1uHz to 10 MHz	1 µHz to 10 MHz	1uHz to 20 MHz
Noise (-3dB)	25 MHz bandwidth	30 MHz bandwidth	60 MHz bandwidth
Arbitrary Waveform	1 µHz to 10 MHz	1 µHz to 10 MHz	1 µHz to 20 MHz
Resolution	1 µHz		
Accuracy	±1 ppm of the setting value, 18°C to 28°C		

Sine Wave Spectrum Purity	
Harmonic Distortion	Typical (0 dBm) DC-10 MHz (included): <-65 dBc 10 MHz to 30 MHz (included): <-55 dBc 30 MHz to 60 MHz (included): <-50 dBc
Total Harmonic Distortion	<0.075% (10 Hz to 20 kHz, 0 dBm)
Spurious (non-harmonic)	Typical (0 dBm) ≤10 MHz: <-70 dBc >10 MHz: <-70 dBc + 6 dB/octave
Phase Noise	Typical (0 dBm, 10 kHz offset) 10 MHz: <-125 dBc/Hz

Signal Characteristics			
Square			
Rise/Fall Time	Typical (1 Vpp) <10ns		
Overshoot	Typical (100 kHz, 1 Vpp) ≤5%		
Duty Cycle	0.01% to 99.99% (limited by the current frequency setting)		
Non-symmetry	1% of the period + 5 ns		
Jitter (rms)	Typical (1 Vpp) ≤5 MHz: 2 ppm + 200 ps > 5 MHz: 200 ps		
Ramp			
Linearity	≤1% of peak output (typical, 1 kHz, 1 VPP, 100% symmetry)		
Symmetry	0% to 100%		
Pulse			
Pulse Width	16ns to 999.999 982 118ks (limited by the current frequency setting)		
Duty Cycle	0.001% to 99.999% (limited by the current frequency setting)		
Rising/Falling Edge	≥10 ns (limited by the current frequency setting and pulse width setting)		
Overshoot	Typical (1 Vpp) ≤5%		
Jitter (rms)	Typical (1 Vpp) ≤5 MHz 2 ppm + 200 ps > 5 MHz 200 ps		
Arbitrary Waveform			
Waveform Length	2Mpts (std.) 16Mpts (opt.)	8Mpts (std.) 16Mpts (opt.)	8Mpts (std.) 16Mpts (opt.)

Vertical Resolution	14 bits
Sample Rate	200MSa/s
Min Rise/Fall Time	Typical (1 Vpp) <10 ns
Jitter (rms)	Typical (1 Vpp) ≤5 MHz: 2 ppm + 200 ps > 5 MHz: 200 ps
Editing Mode	Point Edit, Block Edit, Insert Waveform
Harmonic Output	
Harmonic Order	≤8
Harmonic Type	Even Harmonic, Odd harmonic, Order Harmonic, User
Harmonic Amplitude	The amplitude of each order of harmonic can be set
Harmonic Phase	The phase of each order of harmonic can be set

Output Characteristics

Amplitude (into 50 Ω)	
Range	≤10 MHz: 1.0 mVpp to 10 Vpp ≤30 MHz: 1.0 mVpp to 5.0 Vpp ≤60 MHz: 1.0 mVpp to 2.5 Vpp
Accuracy	Typical (1 kHz sine, 0 V offset, >10 mVpp, auto) ±(1% of the setting value) ±1 mV
Flatness	Typical (sine, 2.5 Vpp) ≤10 MHz: ±0.1 dB ≤60 MHz: ±0.2 dB
Unit	Vpp, Vrms, dBm
Resolution	0.1mVpp or 4 digits
Offset (into 50 Ω)	
Range (Peak ac+dc)	±5Vpk ac+dc
Accuracy	±(1% of the setting value + 5mV + 0.5% of the amplitude)
Waveform Output	
Output Impedance	50 Ω (typical)
Protection	Short-circuit protection, automatically disable the waveform output when overload occurs

Modulation Characteristics

Modulation Type	AM, FM, PM, ASK, FSK, PSK, PWM
AM	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulation Depth	0% to 120%
Modulating Frequency	2 mHz to 1 MHz
FM	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulating Frequency	2 mHz to 1 MHz
PM	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Phase Deviation	0° to 360°
Modulating Frequency	2 mHz to 1 MHz
ASK	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Square with 50% duty cycle
Key Frequency	2 mHz to 1 MHz
FSK	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveform	Square with 50% duty cycle
Key Frequency	2 mHz to 1 MHz
PSK	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External

Modulating Waveform	Square with 50% duty cycle
Key Frequency	2 MHz to 1 MHz
PWM	
Carrier Waveform	Pulse
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Width Deviation	0% to 100% of the pulse width
Modulating Frequency	2 MHz to 1 MHz
External Modulation Input	
Input Range	75 mVRMS to ± 5 Vac + dc
Input Bandwidth	50 kHz
Input Impedance	10K Ω

Burst Characteristics			
Carrier Waveform	Sine, Square, Ramp, Pulse, Noise, Arb (except DC)		
Carrier Frequency	2mHz to 25MHz	2mHz to 30MHz	2 MHz to 60 MHz
Burst Count	1 to 1,000,000 or Infinite		
Start/Stop Phase	0° to 360°, 0.1° resolution		
Internal Period	1 μ s to 500 s		
Gated Source	External Trigger		
Trigger Source	Internal, External or Manual		
Trigger Delay	0 ns to 100 s		

Sweep Characteristics	
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Type	Linear, Log or Step
Direction	Up or Down
Start/Stop Frequency	The same with the upper/lower limit of the corresponding carrier frequency
Sweep Time	1 ms to 500 s
Hold/Return Time	0 ms to 500 s
Trigger Source	Internal, External or Manual
Marker	Falling edge of the sync signal (programmable)

Frequency Counter		
Function	Frequency, Period, Positive/Negative Pulse Width, Duty Cycle	
Frequency Resolution	7 digits/second (Gate Time = 1s)	
Frequency Range	1 μ Hz to 200 MHz	
Period Measurement	Measurement Range	5ns to 16 days
Voltage Range and Sensitivity (non-modulating signal)		
DC Coupling	DC Offset Range	± 1.5 Vdc
	1 μ Hz to 100 MHz	50 mVRMS to ± 2.5 Vac + dc
	100 MHz to 200 MHz	100 mVRMS to ± 2.5 Vac + dc
AC Coupling	1 μ Hz to 100 MHz	50 mVRMS to ± 2.5 Vpp
	100 MHz to 200 MHz	100 mVRMS to ± 2.5 Vpp

Pulse Width and Duty Cycle Measurement			
Frequency and Amplitude Ranges	1 μ Hz to 25 MHz	50 mVRMS to ± 2.5 Vac + dc	DC Coupling
	Pulse Width	Min Pulse Width	
Pulse Width Resolution		5 ns	
Duty Cycle	Measurement Range (display)	0% to 100%	

Input Characteristics			
Input Signal Range	Breakdown Voltage	± 7 Vac+dc	Input Impedance = 1 M Ω
	Coupling Mode	AC	DC
Input Adjustment	High-frequency Rejection	On: Input Bandwidth = 250 kHz; Off: Input Bandwidth = 200 MHz	
	Input Trigger	Trigger Level Range	-2.5V to +2.5V
Trigger Sensitivity Range		0% (about 140 mV hysteresis voltage) to 100% (about 2 mV hysteresis voltage)	
Gate Time	GateTime1	1.310ms	
	GateTime2	10.48ms	
	GateTime3	166.7ms	
	GateTime4	1.342s	
	GateTime5	10.73s	
	GateTime6	>10s	

Trigger Characteristics	
Trigger Input	
Level	TTL-compatible
Slope	Rising or falling (selectable)
Pulse Width	>100ns
Latency	Sweep: <100 ns (typical) Burst: <300 ns (typical)
Trigger Output	
Level	TTL-compatible
Pulse Width	> 60 ns (typical)
Maximum Frequency	1 MHz

Two-channel Characteristics - Phase Offset	
Range	0° to 360°
Waveform Phase Resolution	0.03°

Reference Clock	
External Reference Input	
Lock Range	10 MHz ± 50 Hz
Level	250 mVpp to 5 Vpp
Lock Time	< 2 s
Input Impedance (Typical)	1 kΩ, AC coupling
Internal Reference Output	
Frequency	10 MHz ± 50 Hz
Level	3.3 Vpp
Input Impedance (Typical)	50 Ω, AC coupling

Sync Output	
Level	TTL-compatible
Impedance	50 Ω, nominal value

Overvoltage Protection	
Occurred when:	
<ul style="list-style-type: none"> The instrument amplitude setting is greater than 2Vpp or the output offset is greater than 2V_{bc} and the input voltage is greater than $\pm 11.5 \times (1 \pm 5\%)V$ (<10kHz). The instrument amplitude setting is lower than or equal to 2Vpp or the output offset is lower than or equal to 2V_{bc} and the input voltage is greater than $\pm 3.5 \times (1 \pm 5\%)V$ (<10kHz). 	

General Specifications	
Power Supply	
Power Voltage	100 V to 240 V (45 Hz to 440 Hz)
Power Consumption	Lower than 40 W
Fuse	250 V, T3.15 A
Display	
Type	3.5-inch TFT LCD
Resolution	320 horizontal × RGB × 240 vertical resolution
Color	16 M color
Environment	
Temperature Range	Operating: 0°C to 50°C Non-operating: -40°C to 70°C
Cooling Method	Fan cooling
Humidity Range	Lower than 30°C : ≤95% relative humidity 30°C to 40°C : ≤75% relative humidity 40°C to 50°C : ≤45% relative humidity
Altitude	Operating: below 3000 meters Non-operating: below 15,000 meters
Mechanical	
Dimensions (W×H×D)	261.5 mm × 112 mm × 318.4 mm
Weight	Without Package: 3.2 kg With Package: 4.5 kg
Interfaces	USB Host, USB Device, LAN
IP Protection	IP2X
Calibration Interval	1 year recommended calibration interval

Certification Information		
EMC	in line with EN61326-1:2006	
	IEC 61000-3-2:2000	±4.0kV (contact discharge) ±4.0kV (air discharge)
	IEC 61000-4-3:2002	3 V/m (80 MHz to 1 GHz) 3 V/m (1.4 GHz to 2 GHz) 1 V/m (2.0 GHz to 2.7 GHz)
	IEC 61000-4-4:2004	1 kV power lines
	IEC 61000-4-5:2001	0.5kV (Phase to Neutral) 0.5kV (Phase to PE) 1 kV (Neutral to PE)
	IEC 61000-4-6:2003	3V,0.15MHz-80MHz
	IEC 61000-4-11:2004	Voltage dip: 0 % UT during half cycle 0 % UT during 1 cycle 70 % UT during 25 cycles Short interruption: 0 % UT during 1 cycle
Electrical Safety	Electrical Safety in line with USA:UL 61010-1:2012, Canada: CAN/CSA-C22.2 No. 61010-1-2012 EN 61010-1:2010	

► Ordering Information


	Description	Order Number
Model	DG1022Z (25MHz, Dual-channel)	DG1022Z
	DG1032Z (30MHz, Dual-channel)	DG1032Z
	DG1062Z (60MHz, Dual-channel)	DG1062Z
Standard Accessories	Power Cord	-
	USB Cable	CB-USBA-USBB-FF-150
	BNC Cable	CB-BNC-BNC-MM-100
	Quick Guide	-
	Resource CD (including User's Guide and etc.)	-
Options	16Mpts Memory for Arb	Arb16M-DG1000Z
	Rack Mount Kit (for single instrument)	RM-1-DG1000Z
	Rack Mount Kit (for dual instruments)	RM-2-DG1000Z
	40dB Attenuator	RA5040K
	10W Power Amplifier	PA1011
	USB-GPIB Converter	USB-GPIB

Boost Smart World and Technology Innovation


Industrial Intelligent
Manufacturing



Semiconductors




Education &
Research

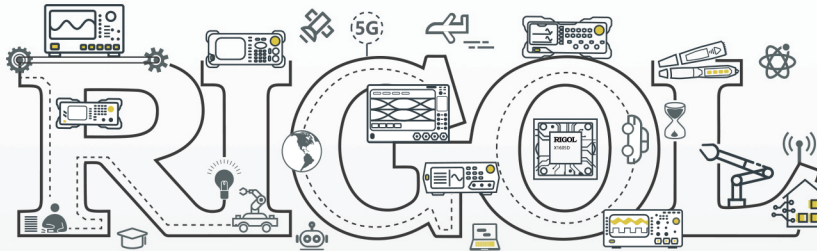

Communication

System Integration



New Energy



- 5G Cellular-5G/WIFI
- UWB/RFID/ ZIGBEE
- Digital Bus/Ethernet
- Optical Communication

- Digital/Analog/RF Chip
- Memory and MCU Chip
- Third-Generation Semiconductor
- Solar Photovoltaic Cells

- New Energy Automobile
- PV/Inverter
- Power Test
- Automotive Electronics

Provide Testing and Measuring Products
and Solutions for Industry Customers

HEADQUARTER

RIGOL TECHNOLOGIES CO., LTD.
No.8 Keling Road, New District,
Suzhou, JiangSu, P.R.China
Tel: +86-400620002
Email: info-cn@rigol.com

JAPAN

RIGOL JAPAN CO., LTD.
5F, 3-45-6, Minamiotsuka, Toshima-Ku,
Tokyo, 170-0005, Japan
Tel: +81-3-6262-8932
Fax: +81-3-6262-8933
Email: info.jp@rigol.com

EUROPE

RIGOL TECHNOLOGIES EU GmbH
Friedrichshafener Str. 5
82205 Gilching
Germany
Tel: +49(0)8105-27292-21
Email: info-europe@rigol.com

KOREA

RIGOL KOREA CO., LTD.
5F, 222, Gonghang-daero,
Gangseo-gu, Seoul, Republic of Korea
Tel: +82-2-6953-4466
Fax: +82-2-6953-4422
Email: info.kr@rigol.com

NORTH AMERICA

RIGOL TECHNOLOGIES, USA INC.
10220 SW Nimbus Ave.
Suite K-7
Portland, OR 97223
Tel: +1-877-4-RIGOL-1
Email: sales@rigol.com

For Assistance in Other Countries

Email: info.int@rigol.com

RIGOL® is the trademark of **RIGOL TECHNOLOGIES CO., LTD.** Product information in this document is subject to update without notice. For the latest information about **RIGOL's** products, applications and services, please contact local **RIGOL** channel partners or access **RIGOL** official website: www.rigol.com

DSB09103-1110-202511