

OPERATING FORCE —————	5-17 OZ
RELEASE FORCE —————	4 OZ MIN
RELEASE TRAVEL —————	.004 MIN
DIFFERENTIAL TRAVEL —————	.005 MAX
OVERTRAVEL —————	.004 MIN

CONTACT ARRANGEMENT


S P D T

```

28 VOLTS DC RATING
   INDUCTIVE-----SEA LEVEL-----4 AMP
                        50,000 FT-----2.5 AMP
   RESISTIVE-----SEA LEVEL-----7 AMP
                        50,000 FT-----7 AMP
   LAMP-----SEA LEVEL-----1 AMP
   MOTOR-----SEA LEVEL-----2.5 AMP

115 V 400 CYCLES-----SEA LEVEL
   RESISTIVE-----7 AMP
   INDUCTIVE-----4 AMP
   LAMP-----1 AMP
   MOTOR-----1.5 AMP




```

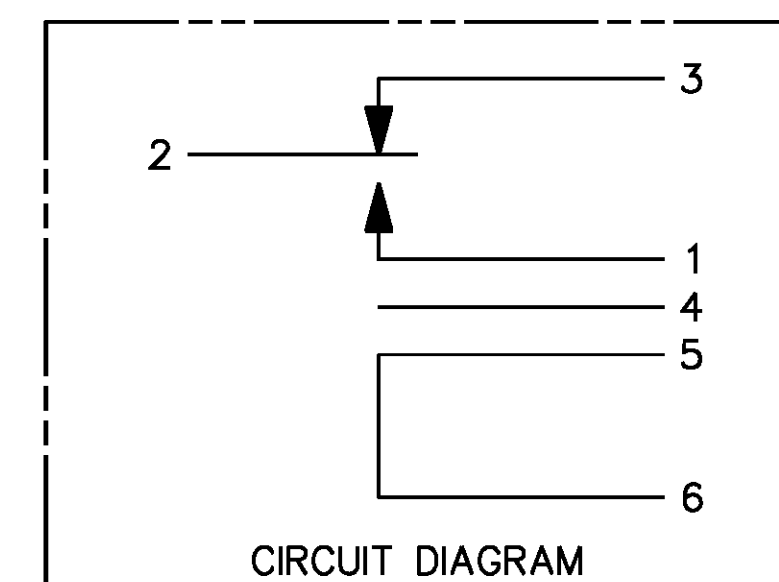

NOTES

① MOUNTING HOLES WILL ACCEPT Ø.087 MAX PINS
OR SCREWS ON .188±.002 CENTERS

② ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED

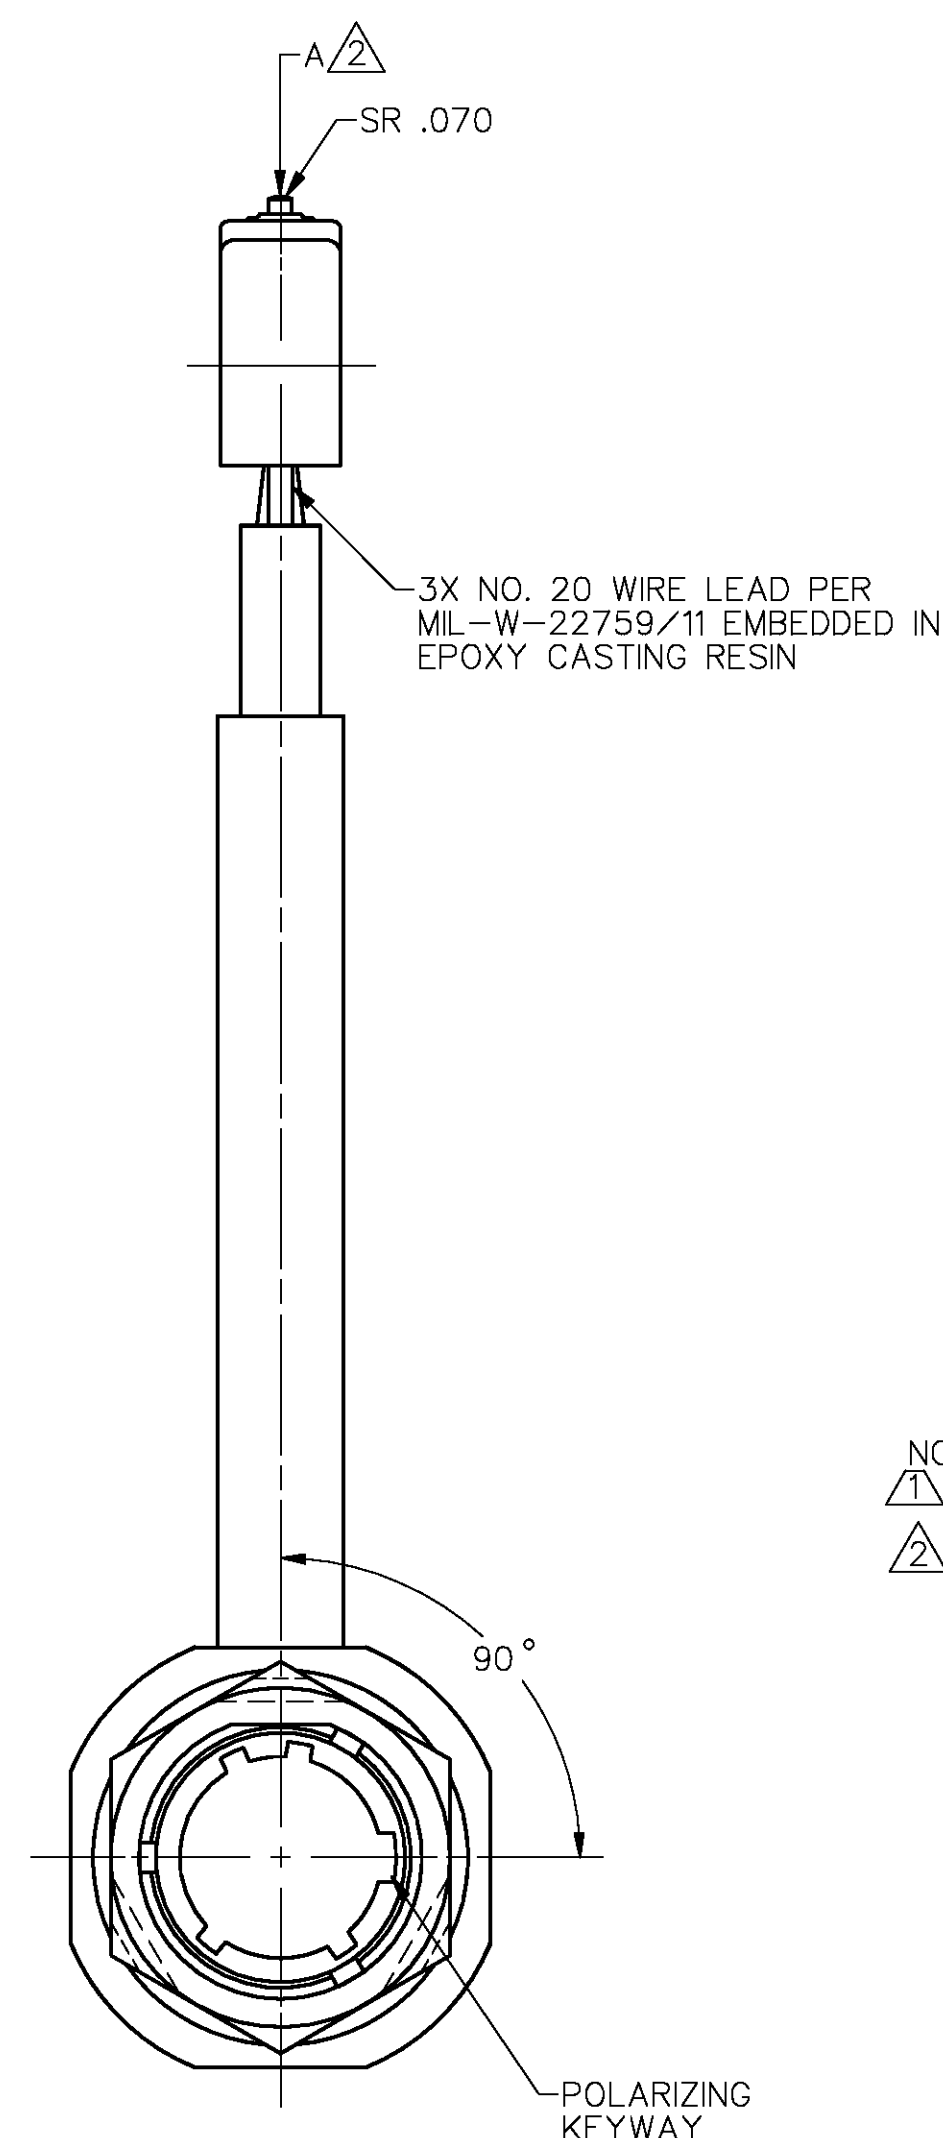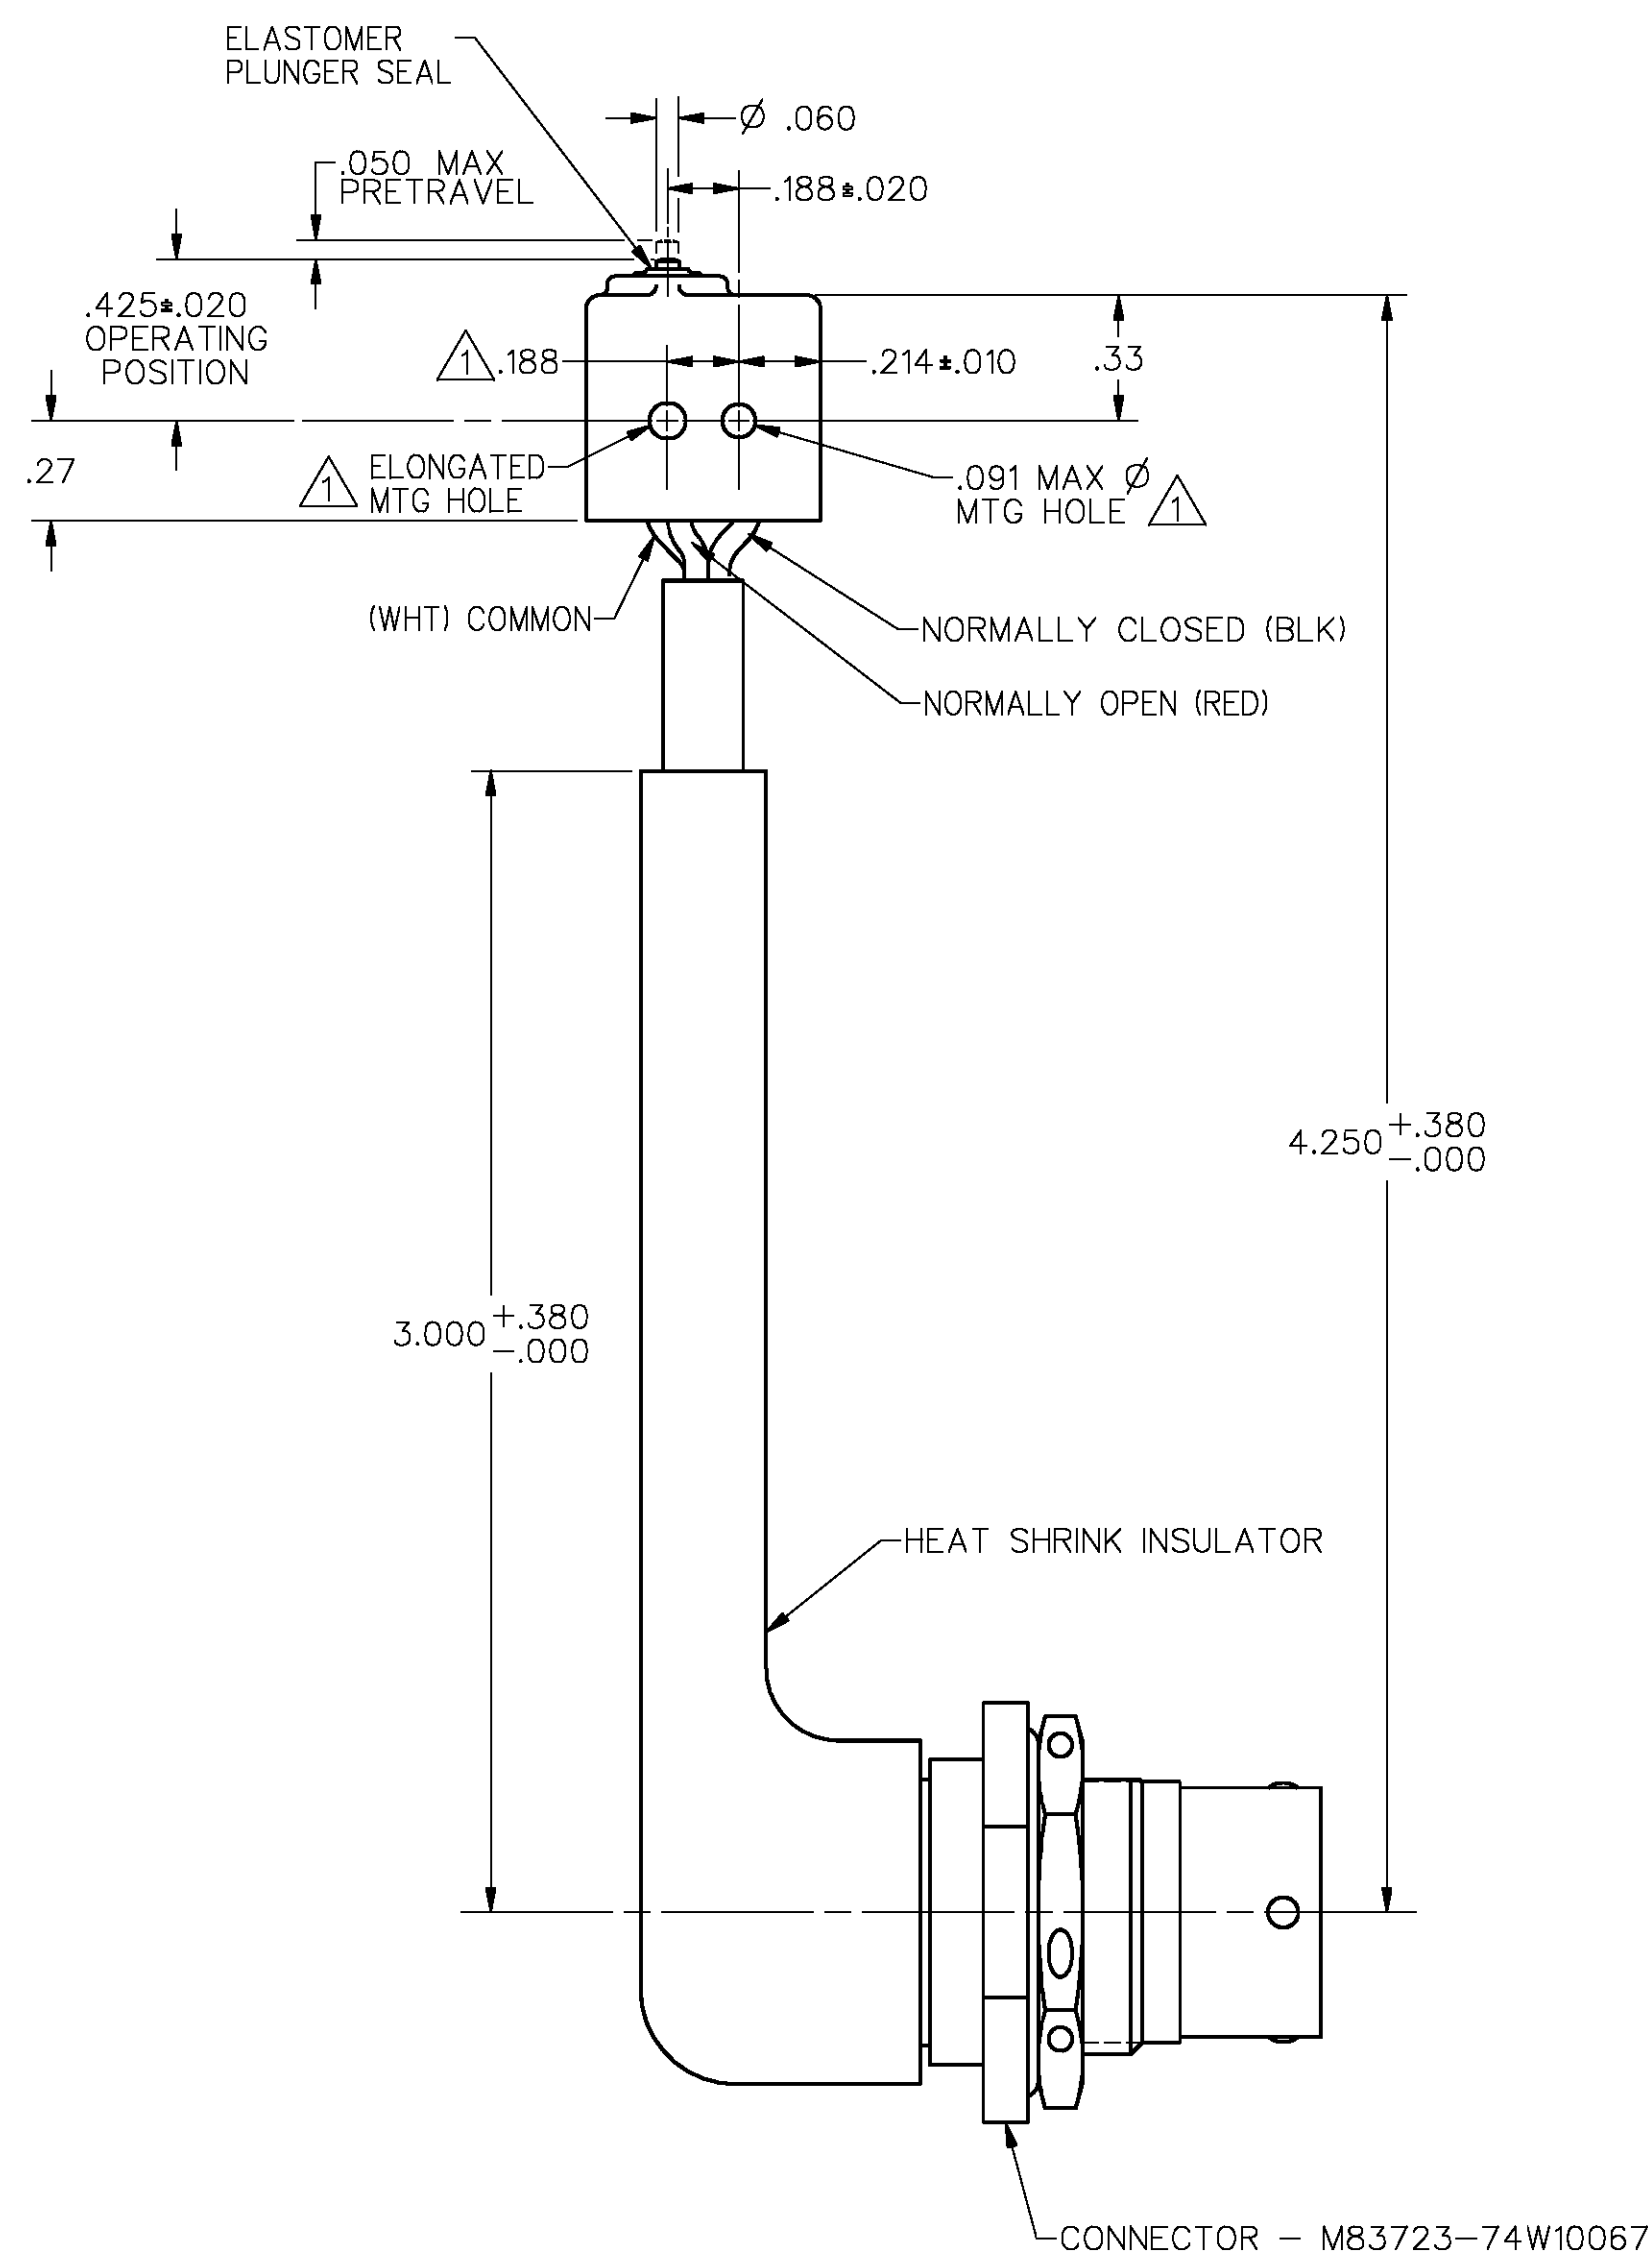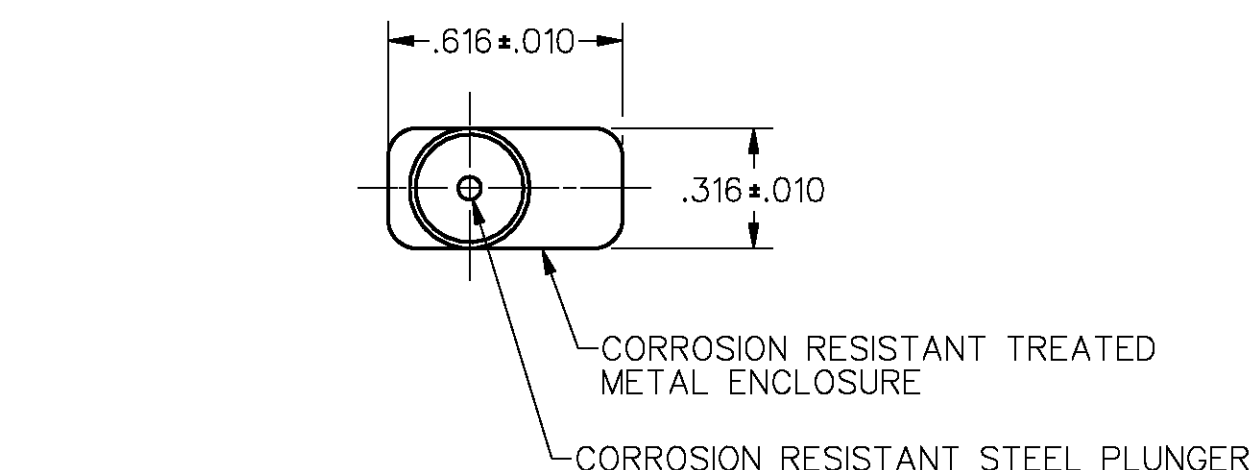


MASTER REDUCED
ANSI Y14.5M-1982 APPLIES

MICRO SWITCH
a Honeywell Division

SWITCH AND CONNECTOR ASSEMBLY

CATALOG LISTING
39XE96

THIRD ANGLE PROJECTION



SCALE 2:1

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

TOLERANCES ARE
ONE PLACE (0) ± 0.30

ONE PLACE	(.0)	$\pm .050$
TWO PLACES	(.00)	$\pm .015$

TWO PLACES	(.00)	$\pm .015$
THREE PLACES	(.000)	$\pm .005$

THREE PLACES (.000) $\pm .005$

ANGLES	$\pm$
--------	-------

WEIGHT

39XE96

DRAWING NUMBER

--	--

REVISIONS

A	PR19726
	MAM
	22 JAN 92
B	CO-72785
	SAV
	5 AUG 92
C	CO-74841
	TSM
	19 APR 93
D	CO-94402
	JJA
	5 MAR 99

DDM/CAD

PAGE 1 OF 1

①

100

10

99

RAWN

1

om Arrow.com