

CST306K

Description:

This kit contains representative samples of our high frequency current sense transformers. They are useful for a variety of developmental needs including circuit simulation, circuit testing, prototyping and agency evaluations. All items in this kit meet specifications listed in the catalog section referring to the product. This kit is housed in an easy to see, easy to store clear polycarbonate box with a convenient snap closing hinged lid.



Electrical Specifications (@25C):

Part No.	ET VμSec REF 20kHz	Turns Count	Min. Ind. mH	DCR Max. Ω	Pri. Amps
<u>CST306-1A</u>	500	50	3.5	.340	35.0 RMS
<u>CST306-1T</u>	500	50 CT	3.5	.340	35.0 RMS
<u>CST306-2A</u>	1000	100	14.0	1.55	25.0 RMS
<u>CST306-2T</u>	1000	100 CT	14.0	1.55	25.0 RMS
<u>CST306-3A</u>	2000	200	55.0	3.75	25.0 RMS
<u>CST306-3T</u>	2000	200 CT	55.0	3.75	25.0 RMS

Dimensions:

Height = 2.0"

Width = 3.75"


Length = 2.5"

Weight = 0.25 Lbs.

For more detailed specifications on individual parts, click on the part number or visit us at www.TriadMagnetics.com

RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

*Upon printing, this document is considered “uncontrolled”. Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.combustion.com/triadmagnetics.com/faq.html>

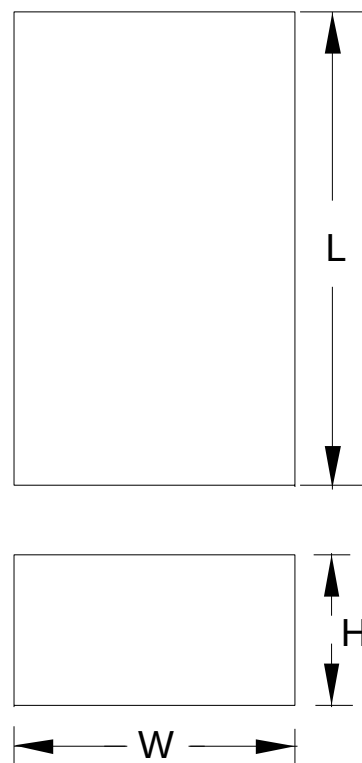

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: April 18, 2019