



Spec No. :DS23-2017-0068 Effective Date: 11/23/2018

**Revision: C** 

**LITE-ON DCC** 

RELEASE

BNS-OD-FC001/A4

### **LITE-ON Technology Corp. / Optoelectronics**



### 1. Description

The LiteON LTPL-U35UVC280GM product series is a revolutionary, energy efficient light source for sterilization and medical application, combining the lifetime and reliability advantages of Light Emitting Diodes with the brightness of conventional light source. It gives you design freedom, and creating a new opportunities for solid state UVC light source to displace conventional UV technologies.

#### 1.1 Features

- I.C. compatible
- RoHS compliant and Pb free
- Lower operating costs
- Reduced maintenance costs


#### 1.2 Available Part Numbers

Nominal peak wavelength (nm)	Forward Voltage	Part Number	
Wp 280	5.5 V	LTPL-U35UVC280GM	

1/13



#### 2. Outline Dimensions

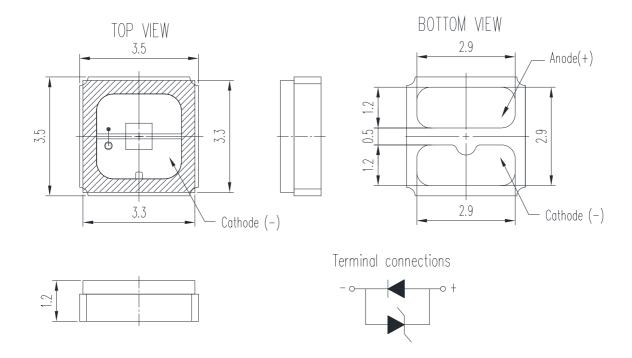

#### **Notes:**

All dimensions are in millimeters and tolerance is ±0.2mm unless otherwise noted.

## 3. Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Rating	Unit
Power Dissipation	Po	0.86	W
DC Forward Current	IF	150	mA
Operating Temperature Range	Topr	-40~+80	C
Storage Temperature Range	Tstg	-40~+100	C
Junction Temperature	Tj	85	C

#### **Notes:**

Operating the LED under reverse bias condition long time might result in damage or failure of the component.




### 4. Electro-Optical Characteristics at Ta=25℃

Parameter	Symbol	Values		Test Condition	Unit
	Vf	Max.	-	If = 100mA	V
Forward Voltage		Тур.	5.5		
		Min.	4.0		
Radiant Flux	Фе	Max.	-	If = 100mA	mW
		Тур.	12		
		Min.	8		
Deals Was rale with	14/	Max	285	If 400m A	
Peak Wavelength	Wp —	Min	265	If = 100mA	nm
Viewing Angle	2θ <sub>1/2</sub>	Тур.	120	If = 100mA	o
Thermal Resistance (Junction-solder point)	Rth j-a	Тур	30	If = 100mA	℃/W

#### **Notes:**

- 1. Radiant flux ( $\Phi e$ ) is the total Radiant flux output as measured with an integrating sphere.
- 2. Forward voltage(Vf) measurement tolerance is  $\pm 0.1V$
- 3. Peak Wavelength measurement tolerance is ± 3nm
- 4. Forward Radiant Flux measurement tolerance is ± 10%
- The thermal resistance is defined as the figure, Rj-a is the Rth from Tj to ambient
  Reference for thermal resistance: Using 2.0x2.0x0.17cm aluminum MCPCB





### 5. Typical Electrical / Optical Characteristics Curves

### (25°C Ambient Temperature Unless Otherwise Noted)

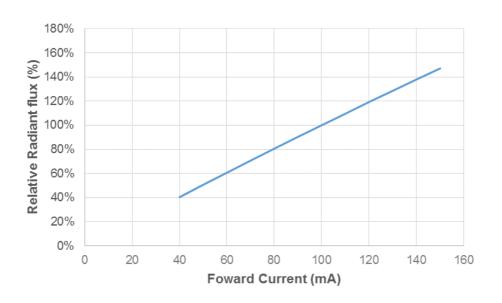


Fig 1. Relative Radiant Flux vs. Forward Current

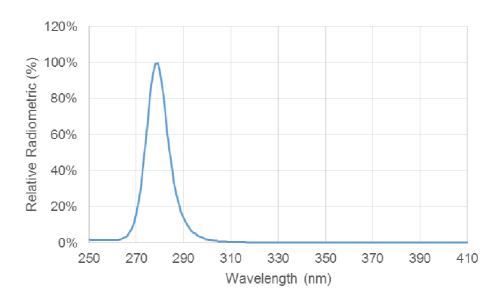


Fig 2. Relative Spectral Distribution



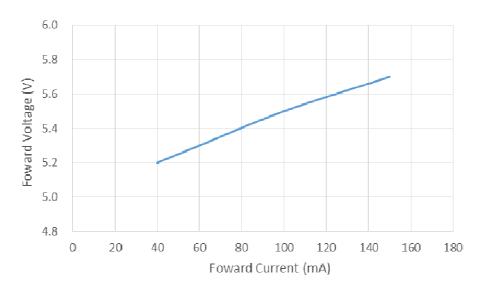


Fig 3. Forward Current vs. Forward Voltage

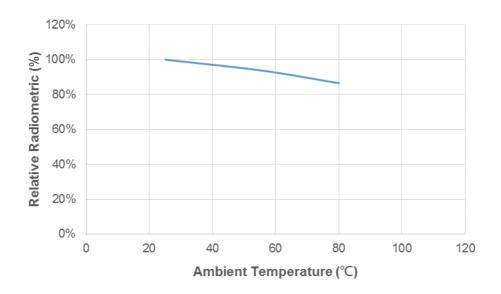


Fig.4 Relative Radiant Flux vs Ambient Temperature



## 6. Reliability Test Plan

#### 6.1 Reliability Test Condition

No	Test item	Condition	Duration
1	Room Temperature Operating Life 1 (RTOL)	Ta = 25°C, IF=100mA	1000 hrs
2	Room Temperature Operating Life 2 (RTOL)	Ta = 25°C, IF=150mA	500 hrs
3	Wet High Temperature Operating Life (WHTOL)	Ta = 60℃, RH = 90%, IF=100mA	1000 hrs
4	Non-Operating Thermal Shock (TMSK)	-30°C ~ 85°C 30min. 30min.	100 cycles

#### **Notes:**

Operating life test are mounted on 90x70x4mm metal thermal heat sink


#### 6.2 Criteria for Judging the Damage

liana	Cambal	Test Condition	Criteria for Judgment	
Item	Symbol	rest Condition	Min.	Max.
Forward Voltage	Vf	If = Typical Current	-	10%
Radiant Flux	Фе	If = Typical Current	70%	-



### 7. User Guide


### 7.1 Suggested Reflow Soldering Characteristics

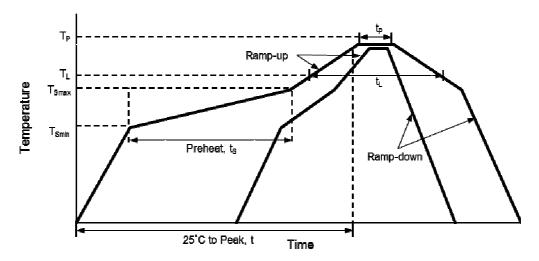

Profile Feature	Lead Free Assembly	
Average Ramp-Up Rate (T <sub>Smax</sub> to T <sub>P</sub> )	3℃ / second max	
Preheat Temperature Min (T <sub>Smin</sub> )	150℃	
Preheat Temperature Max (Tsmax)	200℃	
Preheat Time (t <sub>Smin</sub> to t <sub>Smax</sub> )	60 – 180 seconds	
Time Maintained Above Temperature (T <sub>L</sub> )	217℃	
Time Maintained Above Time (t∟)	60 – 150 seconds	
Peak / Classification Temperature (T <sub>P</sub> )	255℃	
Time Within 5℃ of Actual Peak Temperature (t P)	5 seconds	
Ramp – Down Rate	6℃ / second max	
Time 25℃ to Peak Temperature	8 minutes max	



#### 7.2 Recommend Printed Circuit Board Attachment Pad




#### Notes:

- The LEDs can be soldered using the reflow soldering or hand soldering method. The recommended hand soldering condition is 300℃ max and 2secs max, only once, and the operation of reflow soldering is only up to three times at maximum.
- 2. All temperatures refer to topside of the package, measured on the package body surface.
- 3. The soldering profile could be further referred to different soldering grease material characteristic. The grease vendor will provide this information.
- 4. A rapid-rate process is not recommended for the LEDs cooling down from the peak temperature.
- 5. Although the recommended reflow conditions are specified above, the reflow or hand soldering condition at the lowest possible temperature is desirable for the LEDs.
- LiteOn cannot make a guarantee on the LEDs which have been already assembled using the dip soldering method.
- 7. Recommend printed circuit board attachment pad specification tolerance ±0.1mm.




#### 7.3 Package Dimensions of Tape

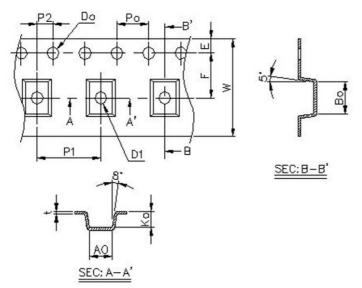

Item	Specification	Tol. (+/-)
W	12.00	± 0.20
Е	1.75	± 0.10
F	5.50	± 0.05
D0	1.50	+0.10,-0
D1	1.50	± 0.10
P0	4.00	± 0.05
P1	8.00	± 0.10
P2	2.00	± 0.10
t	0.23	± 0.05
A0	3.75	± 0.10
B0	3.80	± 0.20
K0	1.70	± 0.20

#### 7.4 Package Dimensions of Reel

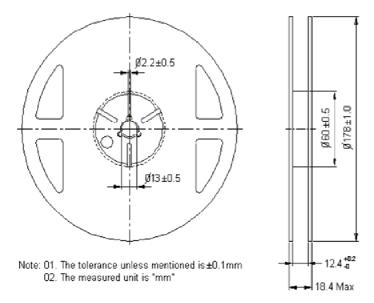

#### Notes:

- 1. Empty component pockets sealed with top cover tape.
- 2. 7 inch reel-maximum 1000 pieces per reel. (Min. packing quantities are 100 pieces for remainders)
- 3. The maximum number of consecutive missing lamps is two.
- 4. In accordance with EIA-481-1-B specifications.



#### 8. Caution

#### **Cleaning**

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

Do not use unspecified chemical liquid to clean LED, it could harm the package.

#### **Drive Method**

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit below.



- (A) Recommended circuit.
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.
- © This LED should be used under forward current, particularly not used under continuous reverse current to avoid the damage to LED.

The electrode pads are plated with gold, but it is still not recommended to the use under any of the following conditions, please confirm the performance and reliability are well enough if you use it under any of the following conditions

- Do not use sulfur-containing materials in commercial products including the materials such as seals and adhesives that may contain sulfur.
- Do not put this product in a place with a lot of moisture (over 85% relative humidity), dew condensation, briny air, and corrosive gas (CI, H2S, NH3, SO2, NOX, etc.).

#### **Manual Handling Remark**

The LED should only be picked up by making contact with the sides of the LED body. It should not put any pressure on the lens either by finger or any hand tool. Do not puncture or push the lens.

10/13

Part No. : LTPL-U35UVC280GM BNS-OD-FC002/A4



#### **ESD (Electrostatic Discharge)**

Static Electricity or power surge will damage the LED. Suggestions to prevent ESD damage:

- Use a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- · All devices, equipment, and machinery must be properly grounded.
- · Work tables, storage racks, etc. Should be properly grounded.
- · Use ion blower to neutralize the static charge which might have built up on surface of the

LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no light up" at low currents. To verify for ESD damage, check for "light up" and V<sub>F</sub> of the suspect LEDs at low currents.

#### Training and Certification

- 1. Working area is ESD-certified.
- 2. Training records and re-certification dates monitored.

#### Static-Safe Workstation & Work Areas

- 1. Static-safe working stations or work-areas have ESD signs.
- 2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V.
- 3. All ionizer activated, positioned towards the units.
- 4. Each work surface mats grounding is good.

#### Personnel Grounding

- 1. Every person (including visitors) handling ESD sensitive (ESDS) items wear wrist strap, heel strap or conductive shoes with conductive flooring.
- 2. If conductive footwear used, conductive flooring also present.
- 3. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V.
- 4. The wrist strap or heel strap/conductive shoes are checked daily and result recorded.
- 5. All wrist strap or heel strap checkers calibration up to date.

#### **Device Handling**

- 1. Each ESDS items identified by EIA-471 labels on item or packaging..
- 2. No static charge generators (e.g. plastics) inside shielding containers with ESDS items.
- 3. All flexible conductive and dissipative package materials are inspected before reuse or recycles

#### **Storage**





This product is qualified as Moisture sensitive Level 3 per JEDEC J-STD-020 Precaution when handling this moisture sensitive product is important to ensure the reliability of the product.

The package is sealed:

The LEDs should be stored at 30℃ or less and 85%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The LEDs should be stored at 30℃ or less and 60%RH or less. The LEDs are limited to solder process within 168hrs. If the Humidity Indicator shows the pink color in 10% even higher or exceed the storage limiting time since opened, we recommended to baking LEDs at 60℃ at least 24hours before solder. To seal the remainder LEDs return to package, it's recommended to be with workable desiccants in original package.

#### **Safety**

DO NOT directly look at the UV light from LED or optical instrument because it is harmful to human eyes. And it is recommended to use UV goggles protective glasses for avoiding eye damage.

Part No. : LTPL-U35UVC280GM BNS-OD-FC002/A4





### 9. Datasheet Version

Version	Date	Owner	Change Item
Preliminary	2017/10/26	Joan SC Wang	Initial specification
А	2018/05/23	Joan SC Wang	Modified forward voltage
В	2018/08/09	Joan SC Wang Modified outline dimension	
С	2018/08/17	Joan SC Wang	Modified maximum operating temperature, Package dimensions of tape.