

The ECS-SR-B Series SMD ceramic resonator includes built in capacitors for reduced component count. The SMD Ceramic resonator is an excellent low cost frequency control solution when absolute frequency accuracy is not important.

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS



- Low Profile SMD package
- RoHS Compliant (Note 7 Exemption)
- Built-in Load Capacitor
- Tape and Reel Packaging

Part Number *	Frequency Range (MHz)	Frequency Accuracy @25°C (%)	Frequency Stability -20 ~ +80°C (%)	Aging for Ten Years (%)	ESR (Ω) MAX	Built-in Capacitance (C1 & C2)	Insulation Resistance @ 10VDC
ECS-SR1-□.□□-B	2.00 ~ 8.00	±0.5	±0.3	±0.3	40	30 pF	100 M Ω Min.

Complete part number to include frequency

Part Numbering Guide: ECS-SR1-4.00-B-TR

ECS	-	Series	-	Frequency	-	Version	-	Packaging
ECS		SR1 = 2 ~ 8 MHz		4.00 = 4.00 MHz		B = SR-B Series		TR = Tape & Reel 2,500/Reel

Package Dimensions (mm)

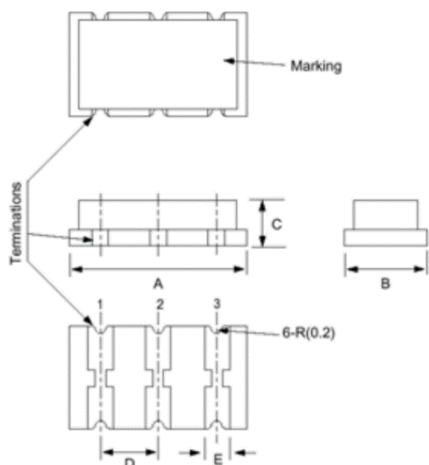


Figure 1) Top, Side, Bottom, and End Views

Pin Connections	
#1	In/Out
#2	Ground
#3	Out/In




Figure 2) Land Pattern

Package Type	Dimensions (mm)				
	A	B	C	D	E
ECS-SR1	7.5	3.3	2.2	2.5	1.5

Package Type	Dimensions (mm)			
	A	B	C	D
ECS-SR1	2.5	1.5	4.0	1.7