

Fully Sealed Potentiometer Cermet or Conductive Plastic



LINKS TO ADDITIONAL RESOURCES



FEATURES

- PRV6S high power rating 1.5 W at 70 °C (cermet)
- PRV6A 0.75 W at 70 °C (conductive plastic)
- Tests according to CECC 41000 or IEC 60393-1
- Low cost
- Compatible RV6 (MIL R 94)
- Mechanical endurance 50 000 cycles
- Construction: fully sealed
- Professional grade
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912




RoHS
COMPLIANT

QUICK REFERENCE DATA


Multiple module	No
Switch module	n/a
Detent module	n/a
Special electrical laws	A: linear, L: logarithmic, F: reverse logarithmic
Sealing level	IP 67
Lifespan	50K cycles

DIMENSIONS in millimeters (inches) ± 0.5 mm (± 0.02")


PRV6 STYLE A AND S

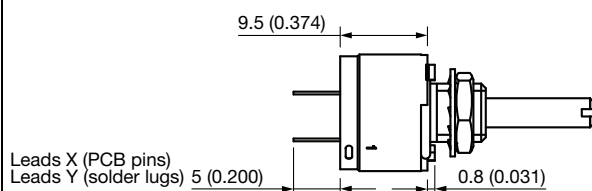


PRV6 STYLE B AND C

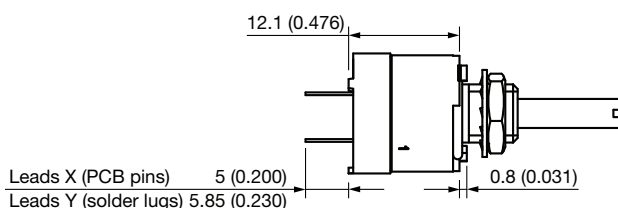


SHAFT DIAMETER 3 mm (0.118") BUSHING A-B-C

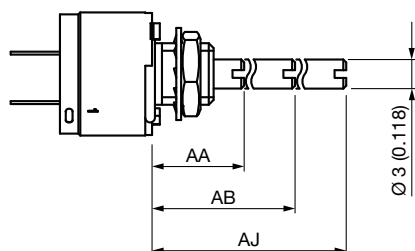


SHAFT DIAMETER 3.17 mm (0.125") BUSHING A-B-C

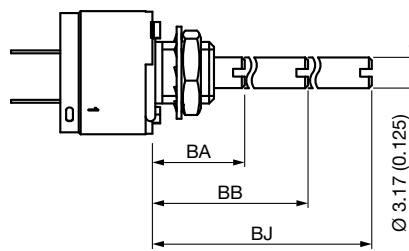


SHAFT DIAMETER 4 mm (0.157") BUSHING H-I (not panel sealed)

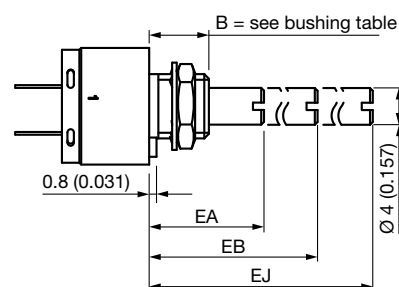




LEADS X = PCB PINS

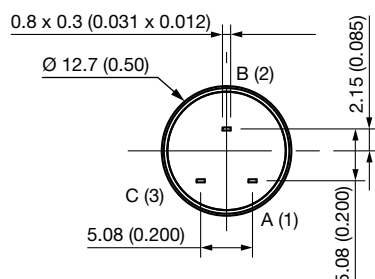

LEADS Y = SOLDER LUGS

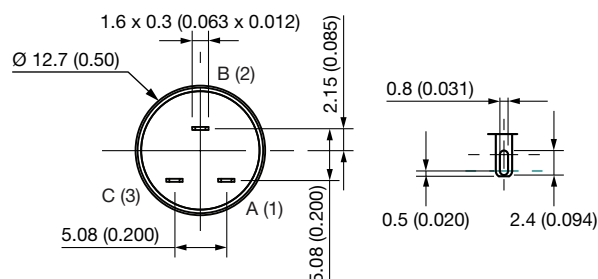

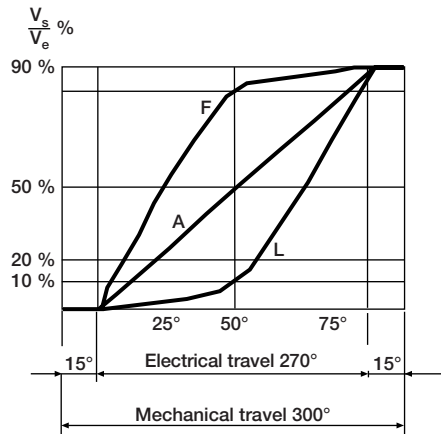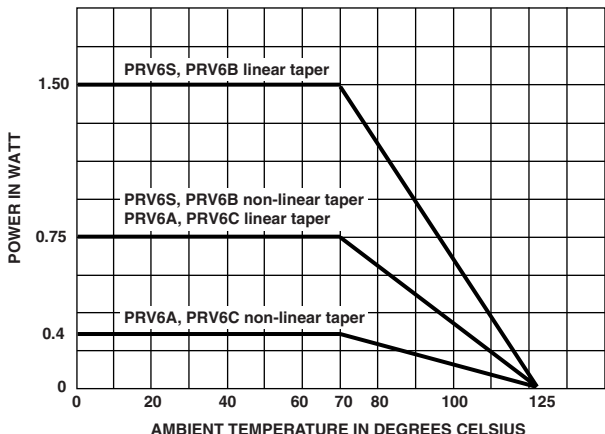

ELECTRICAL SPECIFICATIONS		
	PRV6S, PRV6B	PRV6A, PRV6C
Resistive element	Cermet	Conductive plastic
Electrical travel	270° ± 15°	
Resistance range	Linear taper (A)	1 kΩ to 1 MΩ
	Non-linear taper (F-L)	470 Ω to 500 kΩ (± 20 %)
Taper		
Tolerance	Standard	± 20 %
	On request	± 10 %, ± 5 %
Circuit diagram		
Power rating at 70 °C	Linear	0.75 W at 70 °C
	Other tapers	0.4 W at 70 °C
		
Temperature coefficient (typical)	± 150 ppm/°C	± 500 ppm/°C
Limiting element voltage	350 V	
Contact resistance variation (CRV)	2 % or 3 Ω	
End resistance (typical)	1 Ω	
Dielectric strength (RMS)	1750 V _{RMS}	
Insulation resistance (500 V _{DC})	10 ⁶ MΩ	

**MECHANICAL SPECIFICATIONS**

Mechanical travel	300° ± 5°
Operating torque (Ncm (oz.in.))	0.5 to 2 (0.7 to 3)
End stop torque (max. Ncm (lb.in.))	35 (3)
Tightening torque (max. Ncm (lb.in.))	150 (13)
Weight (g)	5 to 8 max.

ENVIRONMENTAL SPECIFICATIONS

	PRV6S, PRV6B	PRV6A, PRV6C
Temperature range	-55 °C to +125 °C	-40 °C to +125 °C
Climatic category	55/125/56	40/125/56
Sealing	Fully sealed container; IP67 and panel sealed	

PERFORMANCES

TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS		
		$\Delta R_T/R_T$ (%)	$\Delta R_{1-2}/R_{1-2}$ (%)	OTHER
Electrical endurance	1000 h at rated power 90°/30° - temperature 70 °C	± 1 %		CRV < 3 % Rn
Climatic sequence	Phase A dry heat 125 °C Phase B damp heat Phase C cold -55 °C Phase D damp heat 5 cycles	± 0.5 %	± 1 %	
Damp heat, steady state	56 days	± 0.5 %	± 1 %	Insulation resistance: > 10 ⁴ MΩ
Change of temperature	5 cycles, -55 °C to +125 °C	± 0.5 %		
Mechanical endurance	50 000 cycles	± 3 %		CRV < 2 % Rn
Shock	50 g at 11 ms 3 successive shocks in 3 directions	± 0.1 %	± 0.2 %	
Vibration	10 Hz to 55 Hz 0.75 mm or 10 g during 6 h	± 0.1 %	± 0.2 %	

Note

- Nothing stated herein shall be construed as a guarantee of quality or durability

STANDARD RESISTANCE ELEMENT DATA

STANDARD RESISTANCE VALUES	PRV6S AND PRV6B WITH LINEAR TAPER			PRV6S AND PRV6B WITH NON-LINEAR TAPER		
	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. WIPER CURRENT	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. WIPER CURRENT
Ω	W	V	mA	W	V	mA
20	1.5	5.48	274			
50	1.5	8.66	173			
100	1.5	12.2	122			
200	1.5	17.3	87			
500	1.5	27.4	55	0.75	19.4	39
1K	1.5	38.7	38.7	0.75	27.3	27.4
2K	1.5	54.8	27.4	0.75	38.2	19.3
5K	1.5	86.6	17.3	0.75	61.2	12.2
10K	1.5	122.5	12.2	0.75	87	8.7
20K	1.5	173	8.26	0.75	122	6.1
50K	1.5	274	5.65	0.75	194	3.9
100K	1.22	350	3.5	0.75	273	2.74
220K	0.61	350	1.75	0.61	350	1.75
500K	0.25	350	0.70	0.25	350	0.7
1M	0.12	350	0.35	0.12	350	0.35
2M	0.06	350	0.17			
5M	0.025	350	0.070			
10M	0.012	350	0.035			

MARKING

- Vishay trademark
- Part number
- Manufacturing date code
- Terminal: 1

PACKAGING

- Box of 15, 20, 25, or 50 pieces, code B12, B15, B17, or B25, depending of body and shaft construction

Hardware: nuts, washer, and O-ring are separately supplied (not mounted on the potentiometer), in a small bag placed in the packaging.

SHAFT	BUSHING	PACKAGING	
		STYLE: S, A	STYLE: B, C
AA	A, B, C, D, E	B25	B17
AB		B25	B17
AJ		B25	B12
BA		B25	B17
BB		B25	B17
BG		B25	B15
BJ		B25	B12
EA	H, I, J, K, S	B25	B17
EB		B25	B17
EJ		B25	B12
AP	All	Will be defined function of the shaft length	


OPTIONS
SPECIAL FEATURES

Panel sealing


Except for dia. 4 mm shaft, an O-ring is supplied with the potentiometer. This O-ring should be placed into the groove of the body and ensures the panel sealing.
For dia. 4 mm shaft please see note "P" in ordering information.

Shaft locking


Bushing E

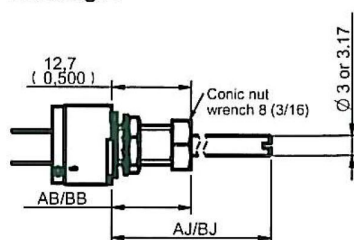


Bushing D







Bushing S no panel sealed (61QH)



Bushing S panel sealed (61QPH)



Shaft locking torque (max. Ncm (lb.in.)) = 25 Ncm max. (2.2 lb.in.) with shaft locking tightening torque = 150 Ncm max. (13.3 lb.in.)

OPTIONS	
SPECIAL FEATURES	
Shafts	Shaft lengths are measured from the mounting face to the free end of the shaft. Special shafts are available if the customer supplies a drawing. The shaft slot is aligned to the wiper within $\pm 10^\circ$.
Locating peg	Except for dia. 4 mm shaft, the potentiometers are delivered with 2 opposite locating pegs orientated at 45°. These 2 pegs can be easily broken-off by the customer. On request, the orientation of the pegs can be at 30° instead of 45°. Locating Peg A Bushing: A-B-C-D-E  Locating Peg R Bushing: H-I-S (locking shaft, not panel sealed)  Locating Peg L Bushing: A-B-C-D-E  Without Locating Peg Panel sealed bushing: 
Ground pin	On request, ground pin can be added to PRV6 model, to connect body to ground

LOCATING PEG CODE					
BUSHING	OLD CODE	A	L	R	O
A	6	x	x		x ⁽¹⁾
B	61	x	x		x ⁽¹⁾
C	62	x	x		x ⁽¹⁾
D	61H	x	x		x ⁽¹⁾
E	62H	x	x		x ⁽¹⁾
H	6Q			x	
I	61Q			x	
J	6QP				x
K	61QP				x
S	61QH			x	
S	61QPH				x

Note
⁽¹⁾ Not standard, special manufacturing

**STANDARD COMBINATION OF SHAFT STYLES AND BUSHING**

BUSHING	THREAD	LOCATING PEG	STANDARD COMBINATION OF SHAFT STYLES AND BUSHING								
A	1/4" 32-UNEF-2A	A	AA	AB	AJ	BA	BB	BG	BJ		
		L	AA	AB	AJ	BA	BB	BG	BJ		
		0 ⁽¹⁾	AA	AB	AJ	BA	BB	BG	BJ		
B	1/4" 32-UNEF-2A	A	AA	AB	AJ	BA	BB	BG	BJ		
		L	AA	AB	AJ	BA	BB	BG	BJ		
		0 ⁽¹⁾	AA	AB	AJ	BA	BB	BG	BJ		
C	1/4" 32-UNEF-2A	A		AB	AJ		BB	BG	BJ		
		L		AB	AJ		BB	BG	BJ		
		0 ⁽¹⁾		AB	AJ		BB	BG	BJ		
D	1/4" 32-UNEF-2A	A	AA	AB	AJ	BA	BB	BG	BJ		
		L	AA	AB	AJ	BA	BB	BG	BJ		
		0 ⁽¹⁾	AA	AB	AJ	BA	BB	BG	BJ		
E	1/4" 32-UNEF-2A	A		AB	AJ		BB	BG	BJ		
		L		AB	AJ		BB	BG	BJ		
		0 ⁽¹⁾		AB	AJ		BB	BG	BJ		
H	M7 x 0.75	R								EA	EB
I	M7 x 0.75	R								EA	EB
J	M7 x 0.75	0								EA	EB
K	M7 x 0.75	0								EA	EB
S (QH)	M7 x 0.75	R								EA	EB
S (QPH)		0								EA	EB

Note⁽¹⁾ Special manufacturing, not standard**OPTION RELATIVE TO APPLICATION****"K14" OPTION** for AMS applications (avionics, military, and space)**"K17" OPTION** for MEDICAL applications

Option guarantees:

- Reinforced incoming inspection on raw material
- Traceability of all materials used in the composition of the product
- 50-year traceability (AMS market) / 20-year traceability (MEDICAL market)
- Customer information for any process or product modification having an impact on the function, mountability, shape or reliability of the product
- Periodic product monitoring
- Dedicated technical specification

ORDERING INFORMATION (part number)

P	R	V	6	B	B	A	B	G	X	B	1	7	5	0	2	M	A
MODEL	STYLE	BUSHING				LOCATING PEG	SHAFT				LEADS	PACKAGING	RESISTANCE CODE / TOLERANCE / TAPER OR SPECIAL				
PRV6	S = standard A = audio B = body length C = audio and body length		Ø	L	Old codes	0 = without A = 45° L = 30° R = 180° round (see locating peg table above)		Ø	L	Old codes	X = PCB pins (old code W) Y = solder lugs	Depending of body and shaft construction: B12 = box 15 pcs B15 = box 20 pcs B17 = box 25 pcs B25 = box 50 pcs	Resistance: from 200 = 20 Ω to 106 = 10 MΩ for linear cermet Tolerance: standard M = 20 % on request K = 10 % or J = 5 % Taper: A, L, F or special code given by Vishay				
		A	1/4	1/4	6		AA	3	9.5	K							
		B	1/4	3/8	61		AB	3	12.5	M							
		C	1/4	1/2	62		AJ	3	22	R							
		D	1/4	3/8	61H		BA	1/8	9.5	CK							
		E	1/4	1/2	62H		BB	1/8	12.5	CM							
		H	7	6.5	6Q		BG	1/8	16	CD							
		I	7	9.5	61Q		BJ	1/8	22	CR							
		J	7	6.5	6QP		EA	4	9.5	E							
		K	7	9.5	61QP		EB	4	12.5	F							
		S	7	9.5	61QH		EJ	4	22	G							
		S	7	9.5	61QPH		AP	custom shaft									
all are slotted																	



PART NUMBER DESCRIPTION (for information only using old codes)													
PRV	S	61	W	CD	5K	20 %	A		BO				e3
MODEL	BUSHING	LEADS	SPECIAL	SHAFT	VALUE	TOLERANCE	TAPER	SPECIAL	PACKAGING	SPECIAL	AP N°	SPECIAL	LEAD FINISH

ACCESSORIES	
Potentiometers are delivered with accessories (nut, washer...)	
Additional Accessories (to order separately)	www.vishay.com/doc?51051
Control knobs	www.vishay.com/doc?51101

RELATED DOCUMENTS	
APPLICATION NOTES	
Potentiometers and Trimmers	www.vishay.com/doc?51001
Guidelines for Vishay Sfernice Resistive and Inductive Components	www.vishay.com/doc?52029



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.