

Date 11/22/2024 Page 1 of 6

SERIES: F2D5-2580 | DESCRIPTION: HIGH CURRENT POWER INDUCTORS

FEATURES

- Ferrite core
- Moisture Sensitivity: Level (MSL) 1
- Small volume, high current, low magnetic loss, low ESR, small parasitic capacitance
- Operating temperature -40°C to 125°C









MODEL	Inductance (Lo)	Tolerance	DC Resistance (DCR)	Saturation Current (Isat)	Temperature Rise Current (Irms)
	typ [μH]	typ [± %]	$egin{aligned} \mathbf{max} \\ [\mathbf{m}\Omega] \end{aligned}$	typ [A]	typ [A]
F2D5-2580-1R5M	1.50	20	2.00	60.0	28.0
F2D5-2580-3R3M	3.30	20	3.00	38.0	26.0
F2D5-2580-4R7M	4.70	20	3.00	30.0	26.0
F2D5-2580-6R8M	6.80	20	3.70	23.0	23.0
F2D5-2580-100M	10.0	20	5.60	20.0	18.0
F2D5-2580-150M	15.0	20	8.76	15.5	15.0
F2D5-2580-220M	22.0	20	8.76	11.5	15.0
F2D5-2580-330M	33.0	20	8.76	8.50	15.0
F2D5-2580-560M	56.0	20	8.76	4.30	15.0

Notes:

- 1. Referenced ambient temperature 25°C
- 2. Test Condition: 100 kHz, 0.1 Vrms
- 3. Saturation Current Isat: The actual value of DC current (A) when the Inductance decrease 30% of its initial value.

 Temperature Rise Current Irms: The actual value of DC current (A) twhen the Temperature rise is ΔT 40°C (Ta = 25°C)
- 4. Operating temperature range includes self-temperature rise.
- 5. Important Reminder: The product temperature can be influenced by various factors such as circuit design, component placement, PCB size and thickness, and the cooling system. Please ensure to verify the product temperature in its final application.

PART NUMBER KEY

Type / Product Series
F2D5 - 2580 - XXX X

Inductance Tolerance
M = ±20%

Inductance *

1R0 = 1.0 µH

* Note: Inductance expressed by three figures. The unit is micro henry (µH). The first and second figures are significant digits, the third figure expresses the number of zeros which follow the two figures. If there is a decimal point, it is expressed by the capital letter "R" (3R8 = 3.8 µH). In that case, all figures are significant digits.

SAFETY AND COMPLIANCE

Parameter	Compliant
RoHS	Compliance with ROHS, Reach compliant and Halogen Free

ENVIROMENTAL


Parameter	Conditions	Min	Тур	Max	Units
Operating temperature	Including coils self-temeprature rise	-40		125	°C
Storage temperature		-40		125	°C

MECHANICAL


Parameter	Conditions	M in	Тур	Max	Units
Core material	Ferrite				
Dimensions	25.0 x 25.0 x 8.4				mm

MECHANICAL DRAWING

Units: mm

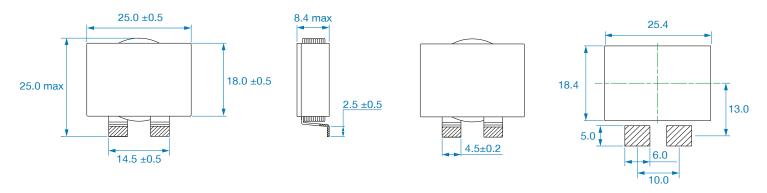



ELECTRICAL DIAGRAM





BEL | SERIES: F2D5-2580 | DESCRIPTION: HIGH CURRENT POWER INDUCTORS


PERFORMANCE CURVES
























REFLOW SOLDERING TEMPERATURE CURVE

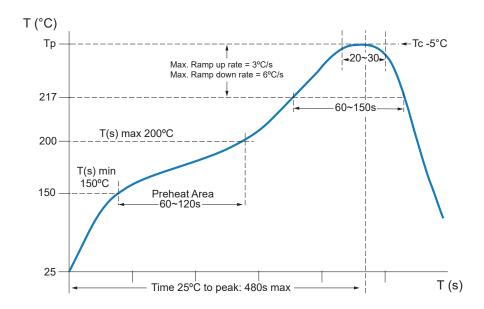


CLASSIFICATION OF PEAK PACKAGE BODY TEMPERATURE

	Dookses Thickness	Package Volume			
	Package Thickness	< 350 mm ³	350 ~ 2000 mm ³	> 2000 mm ³	
	< 1.6 mm	260 °C	260 °C	260 °C	
PB-Free Assembly	1.6 ~ 2.5 mm	260 °C	250 °C	245 °C	
	≥ 2.5 mm	250 °C	245 °C	245 °C	


QUANTITY PER TRAY & PACKING INFORMATION

Units: mm

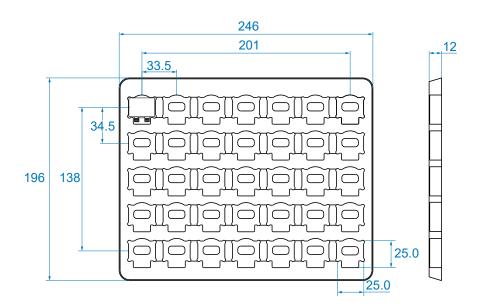

PACKAGING DIMENSIONS (mm)

Product Series	L0	W0	H0	L	W	Н
F2D5-2580	265	205	30	275	232	261

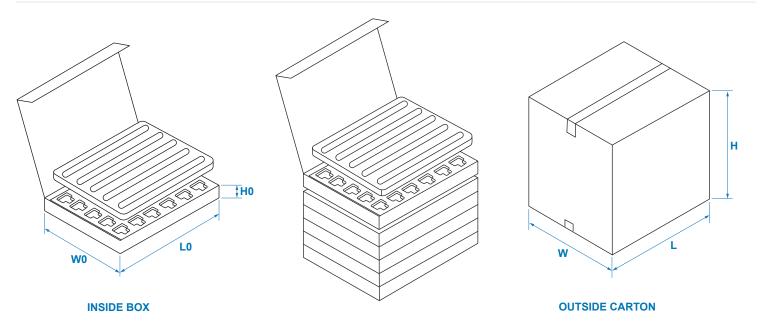

QUANTITY PER PACKAGE

Product Series	Pcs per Tray	Qty of Trays	Qty of Inner Carton	Pcs per Outside Carton
F2D5-2580	35	2	8	560

BEL | SERIES: F2D5-2580 | DESCRIPTION: HIGH CURRENT POWER INDUCTORS

Date 11/22/2024 | Page 6 of 6

REVISION HISTORY

Rev.	Description	Date
1	initial release	November/22/2024

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Bel Fuse Inc. 300 Executive Drive, Suite 300 West Orange, NJ 07052 United States

© 2024 Bel Fuse Inc.

Toll Free 866-239-5777
Tel 516-239-5777 | Fax 516-239-7208
sales@signaltransformer.com
techhelp@signaltransformer.com

belfuse.com