

# MIP SERIES

## Heavy Duty, Media-Isolated Pressure Transducers 1 bar to 60 bar | 15 psi to 870 psi

32354483

Issue D

### DESCRIPTION

The MIP Series offers a heavy duty, media-isolated pressure transducer in a compact, stainless steel construction for use with a wide range of media including aggressive fluids and water. The MIP Series provides a cost-competitive solution for wide-ranging potential applications in tough environments.

### VALUE TO CUSTOMERS

- Total Error Band (TEB)  $\pm 0.75\%FSS$  (Full Scale Span) from  $-40^{\circ}C$  to  $125^{\circ}C$  for ratiometric output: Provides true measurement performance over the compensated temperature range; small error promotes system uptime and efficiency (see Figure 5).
- 4 mA to 20 mA output: Supports transmission of output signals over longer distances
- EMC performance: Operates reliably in the presence of electromagnetic fields, such as wireless signals, RF communication, and electrical devices.
- Hermetically welded design: Supports almost any media without the use of an internal seal. The sensors are designed to be used in harsh environments which see aggressive media.

### DIFFERENTIATION

- Diagnostics: Beneficial in applications where the sensor functionality and the need to know internal or external failure modes is critical.
- Great customer value: Multiple configuration possibilities provide flexibility of use in the application with no up front NRE or tooling charges.
- Durable: Provides the tough environmental capabilities needed, including long-term stability, insulation resistance and dielectric strength, external freeze-thaw resistance for the Metri-Pack 150 versions and EMC performance.



Certified to  
NSF/ANSI/CAN 61

### FEATURES

- Rugged, stainless steel construction
- Ratiometric output: 0.5 Vdc to 4.5 Vdc
- Current output: 4 mA to 20 mA
- Operating temperature:  $-40^{\circ}C$  to  $125^{\circ}C$
- Total Error Band:  $\pm 0.75\%FSS$  to  $\pm 1.0\%FSS$  ( $-40^{\circ}C$  to  $125^{\circ}C$ ) for voltage output
- Industry-leading accuracy:  $\pm 0.15\%FSS$  BFSL for voltage output
- Long term stability:  $\pm 0.25\%FSS$
- Radiated immunity: 100 V/m
- Drinking water approval: NSF/ANSI/CAN 61
- UL, CE, UKCA, RoHS, REACH compliant
- Mis-wiring protection

**TABLE 1. POTENTIAL APPLICATIONS**

Industry	Media
Industrial: pumps compressors process	water, hydraulic fluids compressed air food, beverage, oil, gas, steam
HVAC/R	refrigerants (butane, propane, ammonia, CO <sub>2</sub> , R134A, R407C, R410A, R448A/Solstice® N40, R32 and R1234ze, R1234yf, glycol + water)
Transportation	gasoline, diesel fuel, engine oil, brake fluid, coolants, CNG
Medical	O <sub>2</sub> , N <sub>2</sub> , CO <sub>2</sub> , N <sub>2</sub> O, air



### PORTFOLIO

Honeywell offers a variety of heavy duty pressure transducers for potential use in industrial and transportation applications. To view the entire product portfolio, click [here](#).

**Honeywell**

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

**TABLE 2. ELECTRICAL SPECIFICATIONS (AT 25°C [77°F] AND UNDER UNLESS OTHERWISE NOTED.)**

Characteristic	Ratiometric Output (AA)	Current Output (CH)
Supply voltage ( $V_s$ )	5.0 Vdc $\pm 0.25$ Vdc	8 Vdc to 30 Vdc <sup>1</sup>
Output transfer function	10 % to 90 % of $V_s$	4 mA to 20 mA
Output load (pull up or pull down)	$\geq 2$ k $\Omega$	$(V_s - 8) \times 50\Omega^2$
Short circuit protection		yes
Current consumption	6.5 mA $\pm 1$ mA	—
Over/reverse voltage	$\pm 40$ Vdc	$\pm 35$ Vdc

<sup>1</sup>Supply voltage: Must be de-rated to 8 Vdc to 25 Vdc for above 100°C to 125°C [212°F to 257°F].

<sup>2</sup>Applies at 25°C [77°F]. See Figure 4 for Current Output Supply Voltage.

**TABLE 3. PERFORMANCE SPECIFICATIONS (AT 25°C [77°F] AND UNDER UNLESS OTHERWISE NOTED.)**

Characteristic	Ratiometric Output (AA)	Current Output (CH)
Total Error Band <sup>1</sup>	>10 bar or >150 psi: $\pm 0.75$ %FSS (-40°C to 125°C) <10 bar or <150 psi: $\pm 1.0$ %FSS <sup>2</sup> (-40°C to 125°C)	$\pm 1.0$ %FSS (-20°C to 85°C) $\pm 2.0$ %FSS (-40°C to 125°C)
Operating temperature range		-40°C to 125°C [-40°F to 257°F]
Accuracy BFSL <sup>3</sup>	$\pm 0.15$ %FSS	$\pm 0.25$ %FSS
Long term stability (1000 hr, 25°C)		$\pm 0.25$ %FSS
Typical output resolution		0.05 % Full Scale Pressure
Typical response time <sup>4</sup>	1 ms	2 ms
Startup time <sup>5</sup>		7 ms
EMC rating (CE Conformity):		
surge immunity (all leads)	$\pm 1$ kV line to ground per IEC 61000-4-5	
electrostatic discharge	$\pm 4$ kV contact, $\pm 8$ kV air per IEC 61000-4-2	
radiated immunity	10 V/m (80 MHz to 1000 MHz) per IEC 61000-4-3	
fast transient burst	$\pm 1$ kV per IEC 61000-4-4	
immunity to conducted disturbances	3 V (150 kHz to 80 MHz) per IEC 61000-4-6	
radiated emissions	40 dB $\mu$ V (30 MHz to 230 MHz), 47 dB $\mu$ V (230 MHz to 1000 MHz) per CISPR 11	
Radiated immunity	100 V/m (200 MHz to 2.5 GHz) per ISO 11452-2	100 V/m (300 MHz to 2.7 GHz) per ISO 11452-2 100 V/m (100 kHz to 400 MHz) per ISO 11452-5
Insulation resistance		>100 M $\Omega$ at 1k Vdc (60 s)
Dielectric strength	<1 mA at 500 Vac (60 s)	<1 mA at 1000 Vac (60 s)
Life		>10 million full scale pressure cycles

<sup>1</sup>Total Error Band: The maximum deviation from the ideal transfer function over the entire compensated temperature and pressure range.

Includes all errors due to offset, full scale span, pressure non-linearity, pressure hysteresis, pressure non-repeatability, thermal effect on offset, thermal effect on span, and thermal hysteresis (see Figure 5).

<sup>2</sup>TEB: Above 100°C [212°F] for pressure ratings less than 4 bar [58 psi], TEB is  $\pm 1.5$  %FSS for ratiometric outputs and 2.0 % FSS for other outputs.

<sup>3</sup>Accuracy: The maximum deviation in output from a Best Fit Straight Line (BFSL) fitted to the output measured over the pressure range at 25°C [77°F]. Includes all errors due to pressure non-linearity, pressure hysteresis, and pressure non-repeatability.

<sup>4</sup>Response time: The time taken by the transducer to change output from 10 % to 90 % of full scale in response to a 0 % to 100 % full scale step input pressure.


<sup>5</sup>Startup time: The time needed to receive valid output after power up.

**TABLE 4. ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS**

Characteristic	Parameter
Shock	100 G per MIL-STD-202, Method 213, Cond. C (at 25°C [77°F])
Vibration	20 G sweep, 10 Hz to 2000 Hz (at 25°C [77°F])
Ingress protection:	
Metri-Pack 150 version	IP65, IP67
cable harness version	IP65, IP67, IP69K
DIN version	IP65
External freeze/thaw resistance	>6 cycles from -30°C to 50°C [-22°F to 122°F] (Metri-Pack 150 version only)
Wetted materials:	
port	stainless steel 304L
diaphragm	stainless steel 316L
external seal for ports	nitrile (-30°C to 100°C [-22°F to 212°F]) (other materials available)
Electrical connector material	PBT 30 %GF (UL V-0)
Cable material (jacket and insulation)	TPE (Thermoplastic Elastomer) flame retardant-type cable is FT1 rated per CSA AWM-I-A/B-II-A/B specification, -40°C to 125°C [-40°F to 257°F], three 24 AWG wires.

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

## FIGURE 1. NOMENCLATURE AND ORDER GUIDE

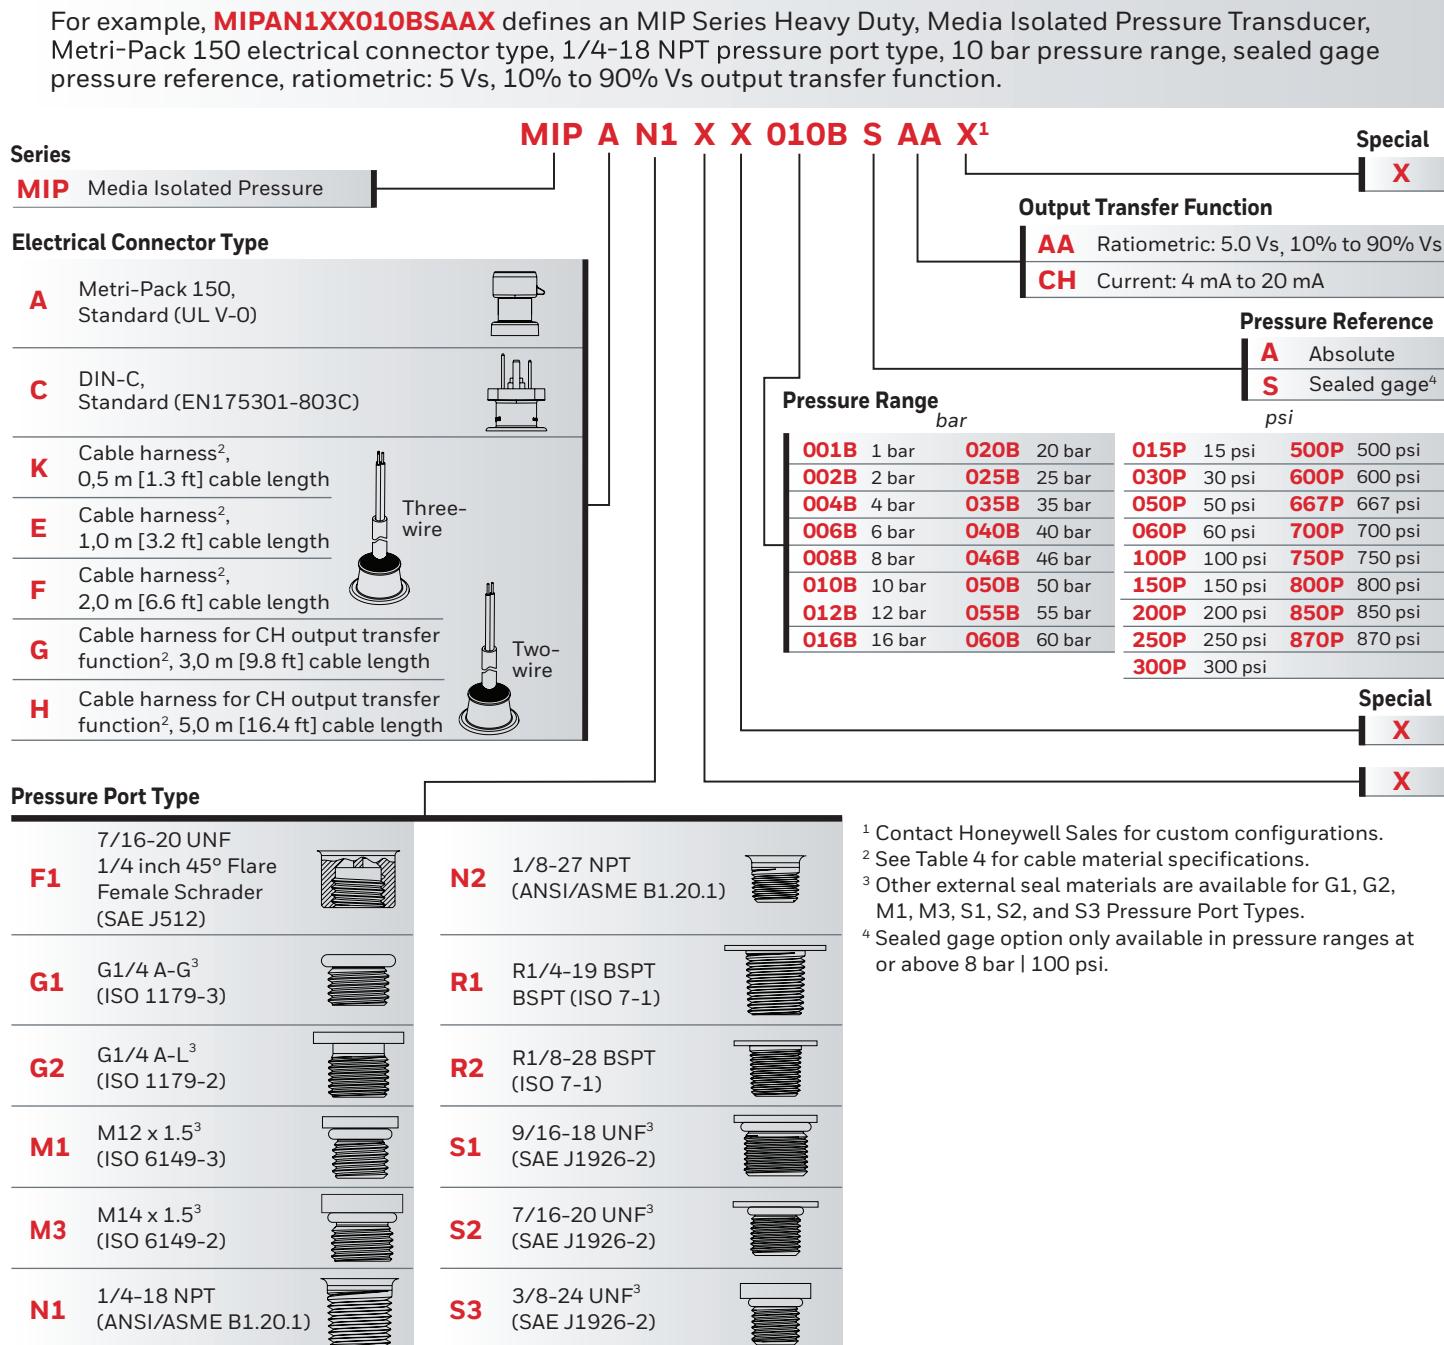

## CAUTION

### PRODUCT DAMAGE DUE TO MISUSE

- Ensure torque specifications are determined for the specific application. Values provided are for reference only. (Mating materials and thread sealants can result in significantly different torque values from one application to the next.)
- Use appropriate tools (such as an open-ended wrench or deep well socket) to install transducers.
- Ensure that the proper mating electrical connector with a seal is used to connect the transducer. Improper or damaged seals can compromise ingress protection, leading to short circuits.
- Ensure that filters are used upstream of the transducers to keep media flow free of particulates. MIP Series transducers are dead-end devices. Particulate accumulation may clog the port or damage the diaphragm.
- Ensure that the transducer is mounted in a vertical position with the process connection (pressure port) downward to avoid particular deposits.
- Ensure that the media does not create a residue when dried. Build-up of residue inside the transducer may affect its output.
- Ensure that the transducer housing is properly grounded.
- For cable harness versions, ensure that the cable bend radius is maintained at a minimum of 38 mm [1.50 in] in the end application assembly.

**Failure to comply with these instructions may result in product damage.**

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

TABLE 5. PRESSURE RATINGS

BAR			PSI		
OPERATING PRESSURE	OVER-PRESSURE <sup>1</sup>	BURST PRESSURE <sup>2</sup>	OPERATING PRESSURE	OVER-PRESSURE <sup>1</sup>	BURST PRESSURE <sup>2</sup>
1 to 3	6	207	15 to 43.5	87	3000
>3 to 12	24		>43.5 to 174	348	
>12 to 60	120		>174 to 870	1740	

<sup>1</sup>**Overpressure:** The maximum pressure which may safely be applied to the product for it to remain in specification once pressure is returned to the operating pressure range. Exposure to higher pressures may cause permanent damage to the product.

<sup>2</sup>**Burst Pressure:** The maximum pressure which may be applied without causing escape of pressure media. The product should not be expected to function after exposure to the burst pressure.

FIGURE 2. RATIO METRIC OUTPUT TRANSFER FUNCTION

The transfer function shown here is applicable to a ratiometric output ranging between 10 %  $V_{\text{supply}}$  at null pressure to 90 %  $V_{\text{supply}}$  at full scale pressure.

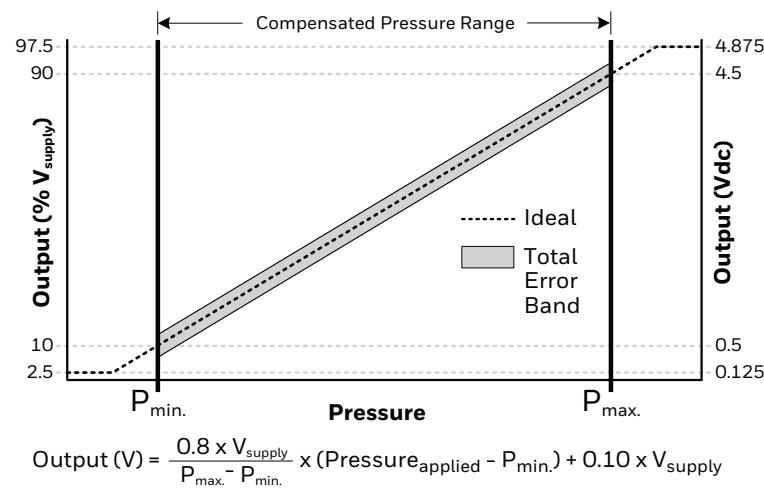


FIGURE 3. ABSOLUTE VS SEALED GAGE

Example shown is for 100 psi.


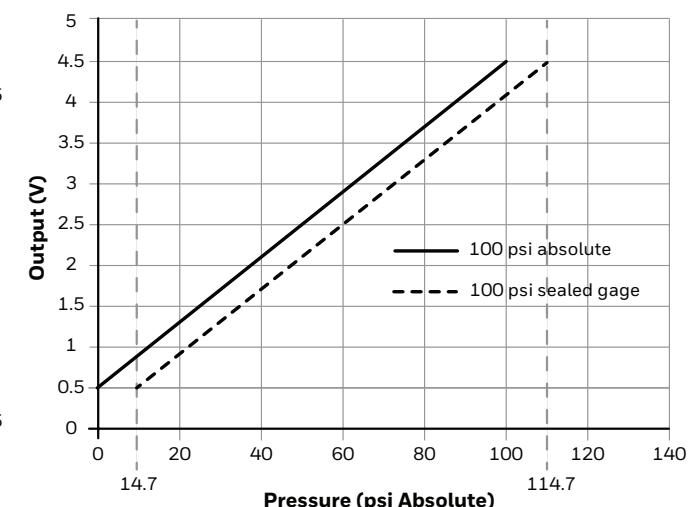


FIGURE 4. CURRENT OUTPUT SUPPLY VOLTAGE VS TEMPERATURE

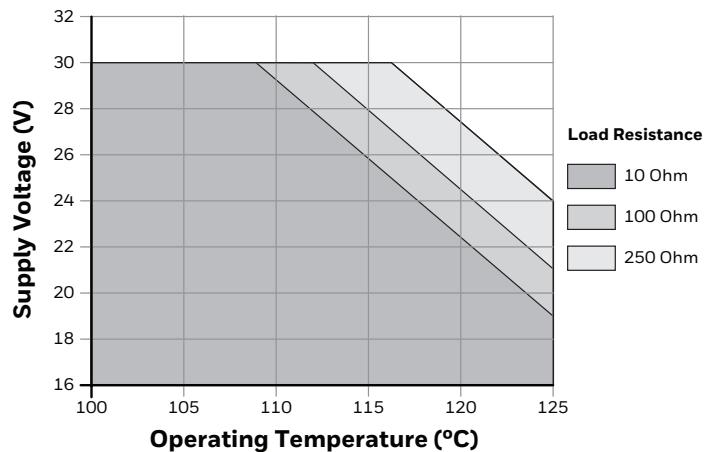

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

## TOTAL ERROR BAND


Total Error Band (TEB) is a single specification that includes the major sources of sensor error. TEB should not be confused with accuracy, which is actually a component of TEB. TEB is the maximum error that the sensor could experience.

Honeywell uses the TEB specification in its datasheet because it is the most comprehensive measurement of a sensor's true accuracy.

Honeywell also provides the accuracy specification in order to provide a common comparison with competitors' literature that does not use the TEB specification.

Many competitors do not use TEB—they simply specify the accuracy of their device. Their accuracy specification, however, may exclude certain parameters. On their datasheet, the errors are listed individually. When combined, the total error (or what would be TEB) could be significant.

**FIGURE 5. TEB COMPONENTS FOR THE MIP SERIES**

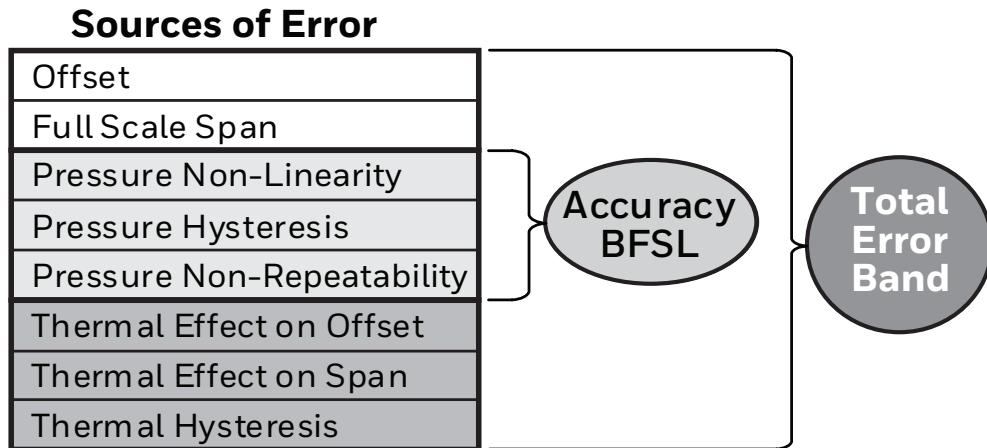


**TABLE 6. OUTPUT DIAGNOSTIC CODE FOR RATIO METRIC OUTPUT**

FAULT CONDITION	ANALOG DIAGNOSTIC RAIL
Sensor internal failures	97.5 % of $V_{\text{supply}}$ (See Figure 2.)
Over pressure	97.5 % of $V_{\text{supply}}$ (See Figure 2.)
Under pressure (for sealed gage only)	2.5 % of $V_{\text{supply}}$ (See Figure 2.)
Power or ground loss	high (external pull-up resistor)
Power or ground loss	low (external pull-down resistor)

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

FIGURE 6. METRI-PACK 150 MOUNTING DIMENSIONS (FOR REFERENCE ONLY. MM/[IN])

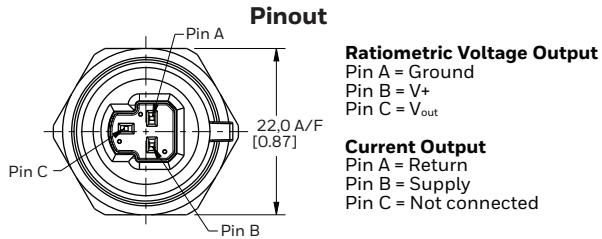


## F1: 7/16-20 UNF 1/4 inch 45° Flare Female Schrader (SAE J512)

Seal: 45° cone

Mating geometry: SAE J512

Installation torque: 17 N m [12 ft-lb]

Weight: 36 g [1.3 oz]

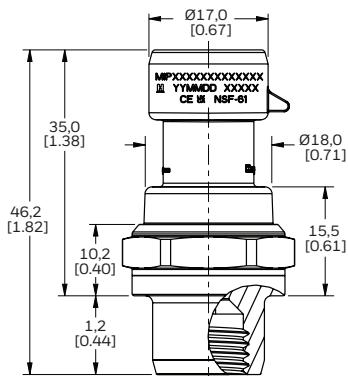


## G2: G1/4 A-L (ISO 1179-2)

Seal: ISO 9974-2/DIN 3869 profile ring (included)

Mating geometry: ISO 1179-1

Installation torque: 20 N m [15 ft-lb]

Weight: 36 g [1.3 oz]

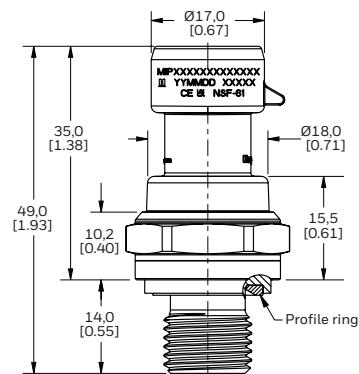


## M3: M14 x 1.5 (ISO 6149-2)

Seal: O-ring (included)

Mating geometry: ISO 6149-1

Installation torque: 30 N m [22.1 ft-lb]

Weight: 39 g [1.4 oz]

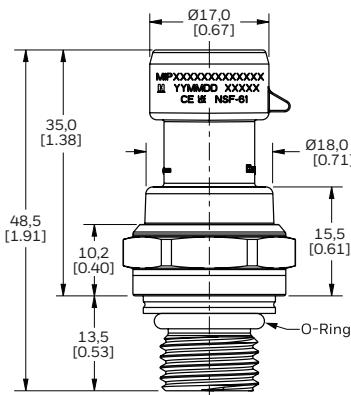

## Product Marking



MIPXXXXXXXXXXXXXX  
H YYMMDD XXXXX  
CE UK NSF-61  
CE Mark  
UKCA Mark  
NSF Mark

16-Digit product listing  
5-Digit serial number  
6-Digit date


## G1: G1/4 A-G (ISO 1179-3)

Seal: O-ring (included) and retaining ring ISO 1179-3-G1/4 (not included)

Mating geometry: ISO 1179-1

Installation torque: 20 N m [14.7 ft-lb]

Weight: 33 g [1.1 oz]

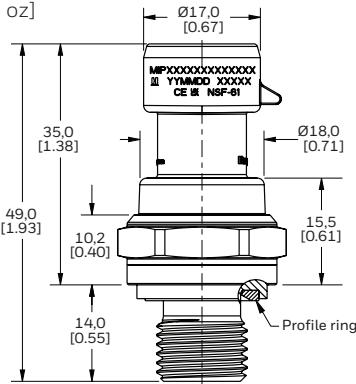


## M1: M12 x 1.5 (ISO 6149-3)

Seal: O-ring (included)

Mating geometry: ISO 6149-1

Installation torque: 20 N m [15 ft-lb]

Weight: 34 g [1.2 oz]

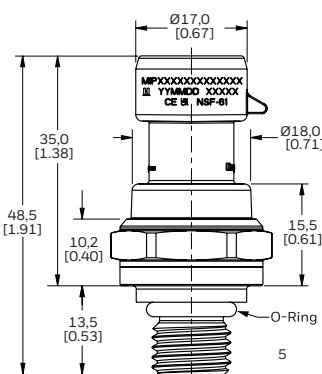


## N1: 1/4-18 NPT

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 38 g [1.3 oz]

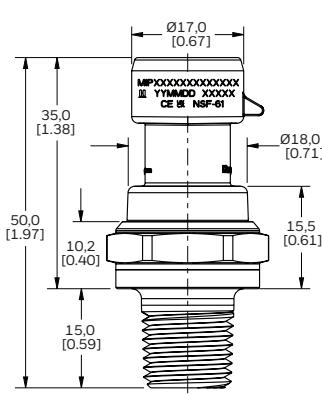

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

FIGURE 6. METRI-PACK 150 MOUNTING DIMENSIONS (CONTINUED)


**N2: 1/8-27 NPT**

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 30 g [1.0 oz]

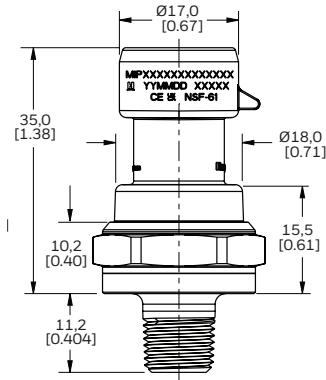


**R1: R1/4-19 BSPT (ISO 7-1)**

Seal: Pipe thread

Mating geometry: ISO 7-1

Installation torque: Two to three turns from finger tight

Weight: 29 g [1.0 oz]

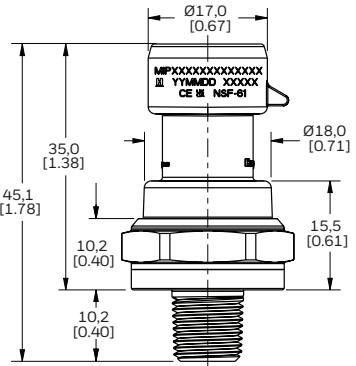


**S1: 9/16-18 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 30 N m [22.1 ft-lb]

Weight: 44 g [1.6 oz]

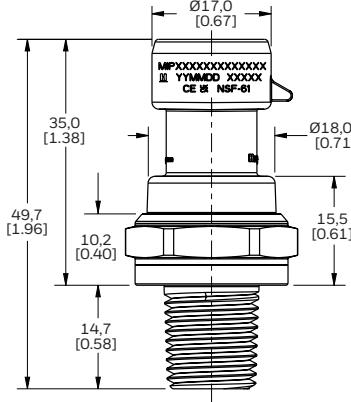



**R2: R1/8-28 BSPT (ISO 7-1)**

Seal: Pipe thread

Mating geometry: ISO 7-1

Installation torque: Two to three turns from finger tight

Weight: 29 g [1.0 oz]

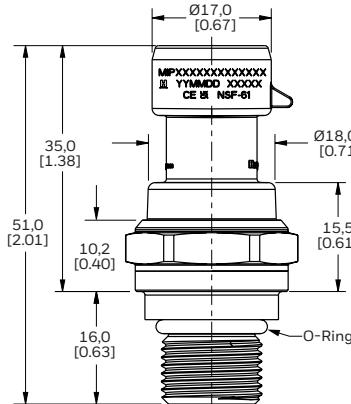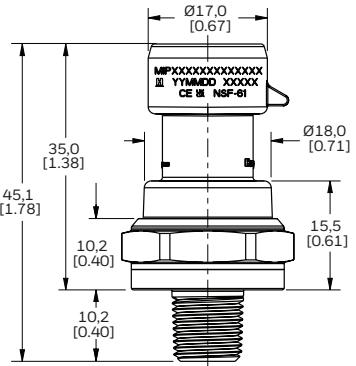


**S2: 7/16-20 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 18 N m [13.3 ft-lb]

Weight: 36 g [1.3 oz]

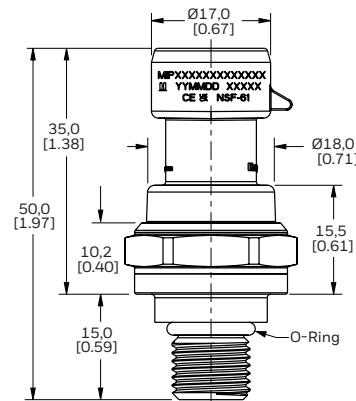


**S3: 3/8-24 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1



Installation torque: 10 N m [7.4 ft-lb]

Weight: 32 g [1.1 oz]

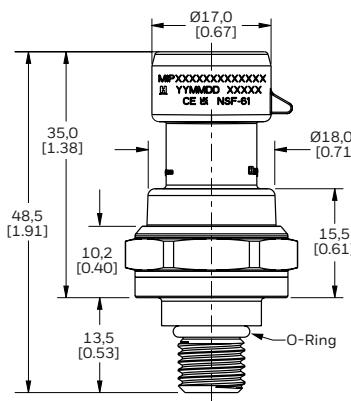

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

FIGURE 7. DIN-C MOUNTING DIMENSIONS (FOR REFERENCE ONLY. MM/[IN])

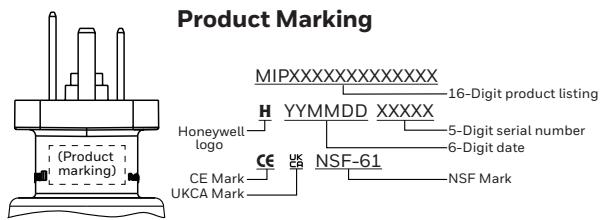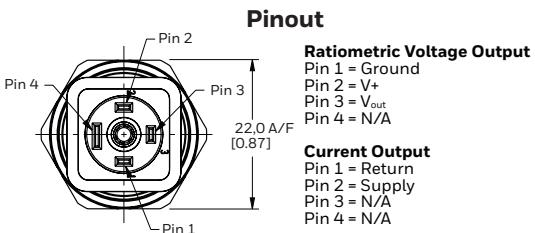


## F1: 7/16-20 UNF 1/4 inch 45° Flare Female Schrader (SAE J512)

Seal: 45° cone

Mating geometry: SAE J512

Installation torque: 17 N m [12 ft-lb]

Weight: 36 g [1.3 oz]

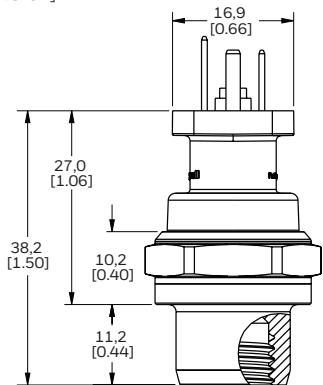


## G2: G1/4 A-L (ISO 1179-2)

Seal: ISO 9974-2/DIN 3869 profile ring (included)

Mating geometry: ISO 1179-1

Installation torque: 20 N m [15 ft-lb]

Weight: 36 g [1.3 oz]

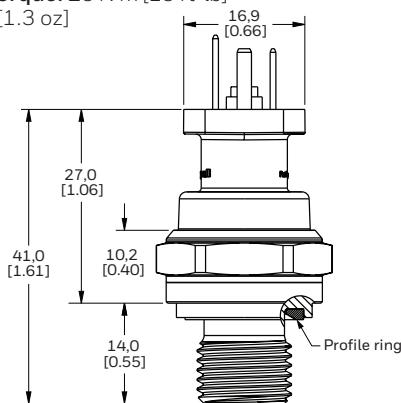


## M3: M14 x 1.5 (ISO 6149-2)

Seal: O-ring (included)

Mating geometry: ISO 6149-1

Installation torque: 30 N m [22.1 ft-lb]

Weight: 39 g [1.4 oz]

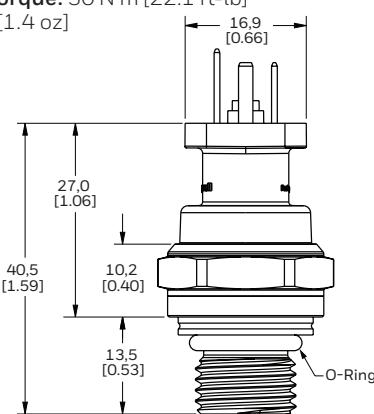


## G1: G1/4 A-G (ISO 1179-3)

Seal: O-ring (included) and retaining ring ISO 1179-3-G1/4 (not included)

Mating geometry: ISO 1179-1

Installation torque: 20 N m [14.7 ft-lb]

Weight: 33 g [1.1 oz]

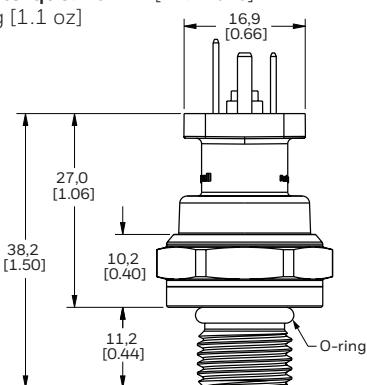


## M1: M12 x 1.5 (ISO 6149-3)

Seal: O-ring (included)

Mating geometry: ISO 6149-1

Installation torque: 20 N m [15 ft-lb]

Weight: 34 g [1.2 oz]

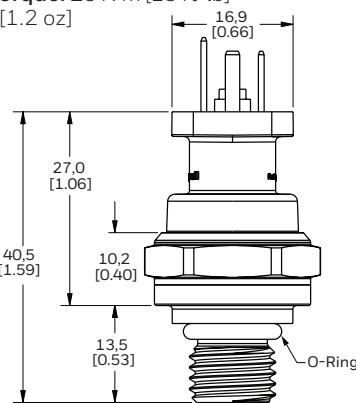


## N1: 1/4-18 NPT

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 38 g [1.3 oz]

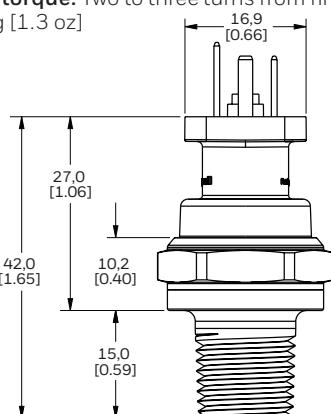

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

FIGURE 7. DIN-C MOUNTING DIMENSIONS (CONTINUED)


**N2: 1/8-27 NPT**

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 30 g [1.0 oz]

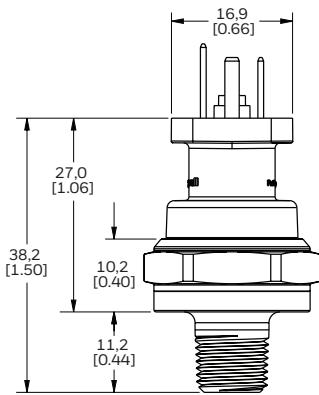


**R2: R1/8-28 BSPT (ISO 7-1)**

Seal: Pipe thread

Mating geometry: ISO 7-1

Installation torque: Two to three turns from finger tight

Weight: 29 g [1.0 oz]

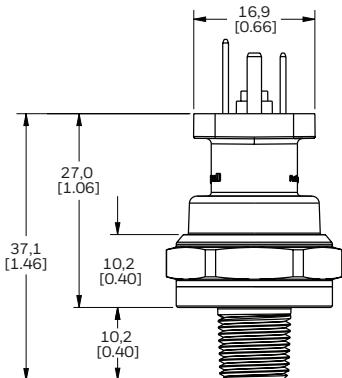


**S2: 7/16-20 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 18 N m [13.3 ft-lb]

Weight: 36 g [1.3 oz]

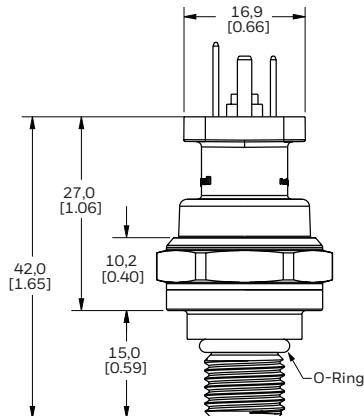


**R1: R1/4-19 BSPT (ISO 7-1)**

Seal: Pipe thread

Mating geometry: ISO 7-1

Installation torque: Two to three turns from finger tight

Weight: 36 g [1.3 oz]

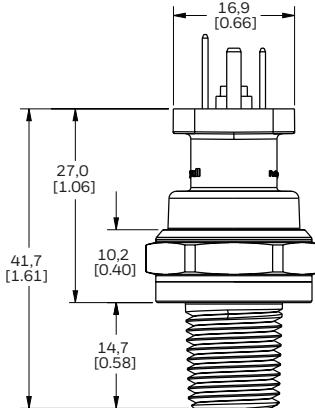


**S1: 9/16-18 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 30 N m [22.1 ft-lb]

Weight: 44 g [1.6 oz]

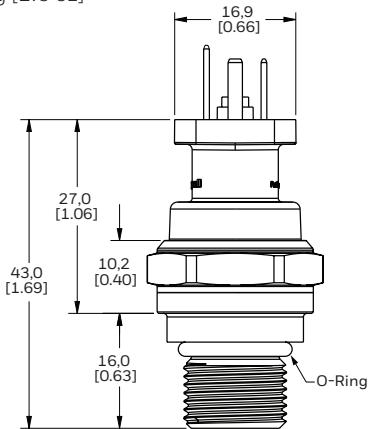


**S3: 3/8-24 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1


Installation torque: 10 N m [7.4 ft-lb]

Weight: 32 g [1.1 oz]

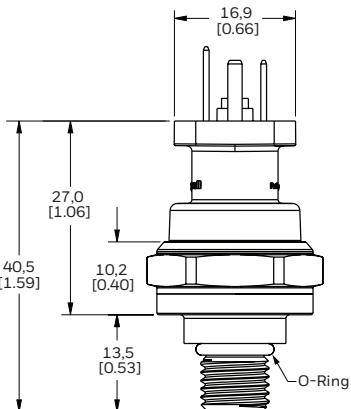

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

**FIGURE 8. CABLE HARNESS MOUNTING DIMENSIONS (FOR REFERENCE ONLY. MM/[IN])**

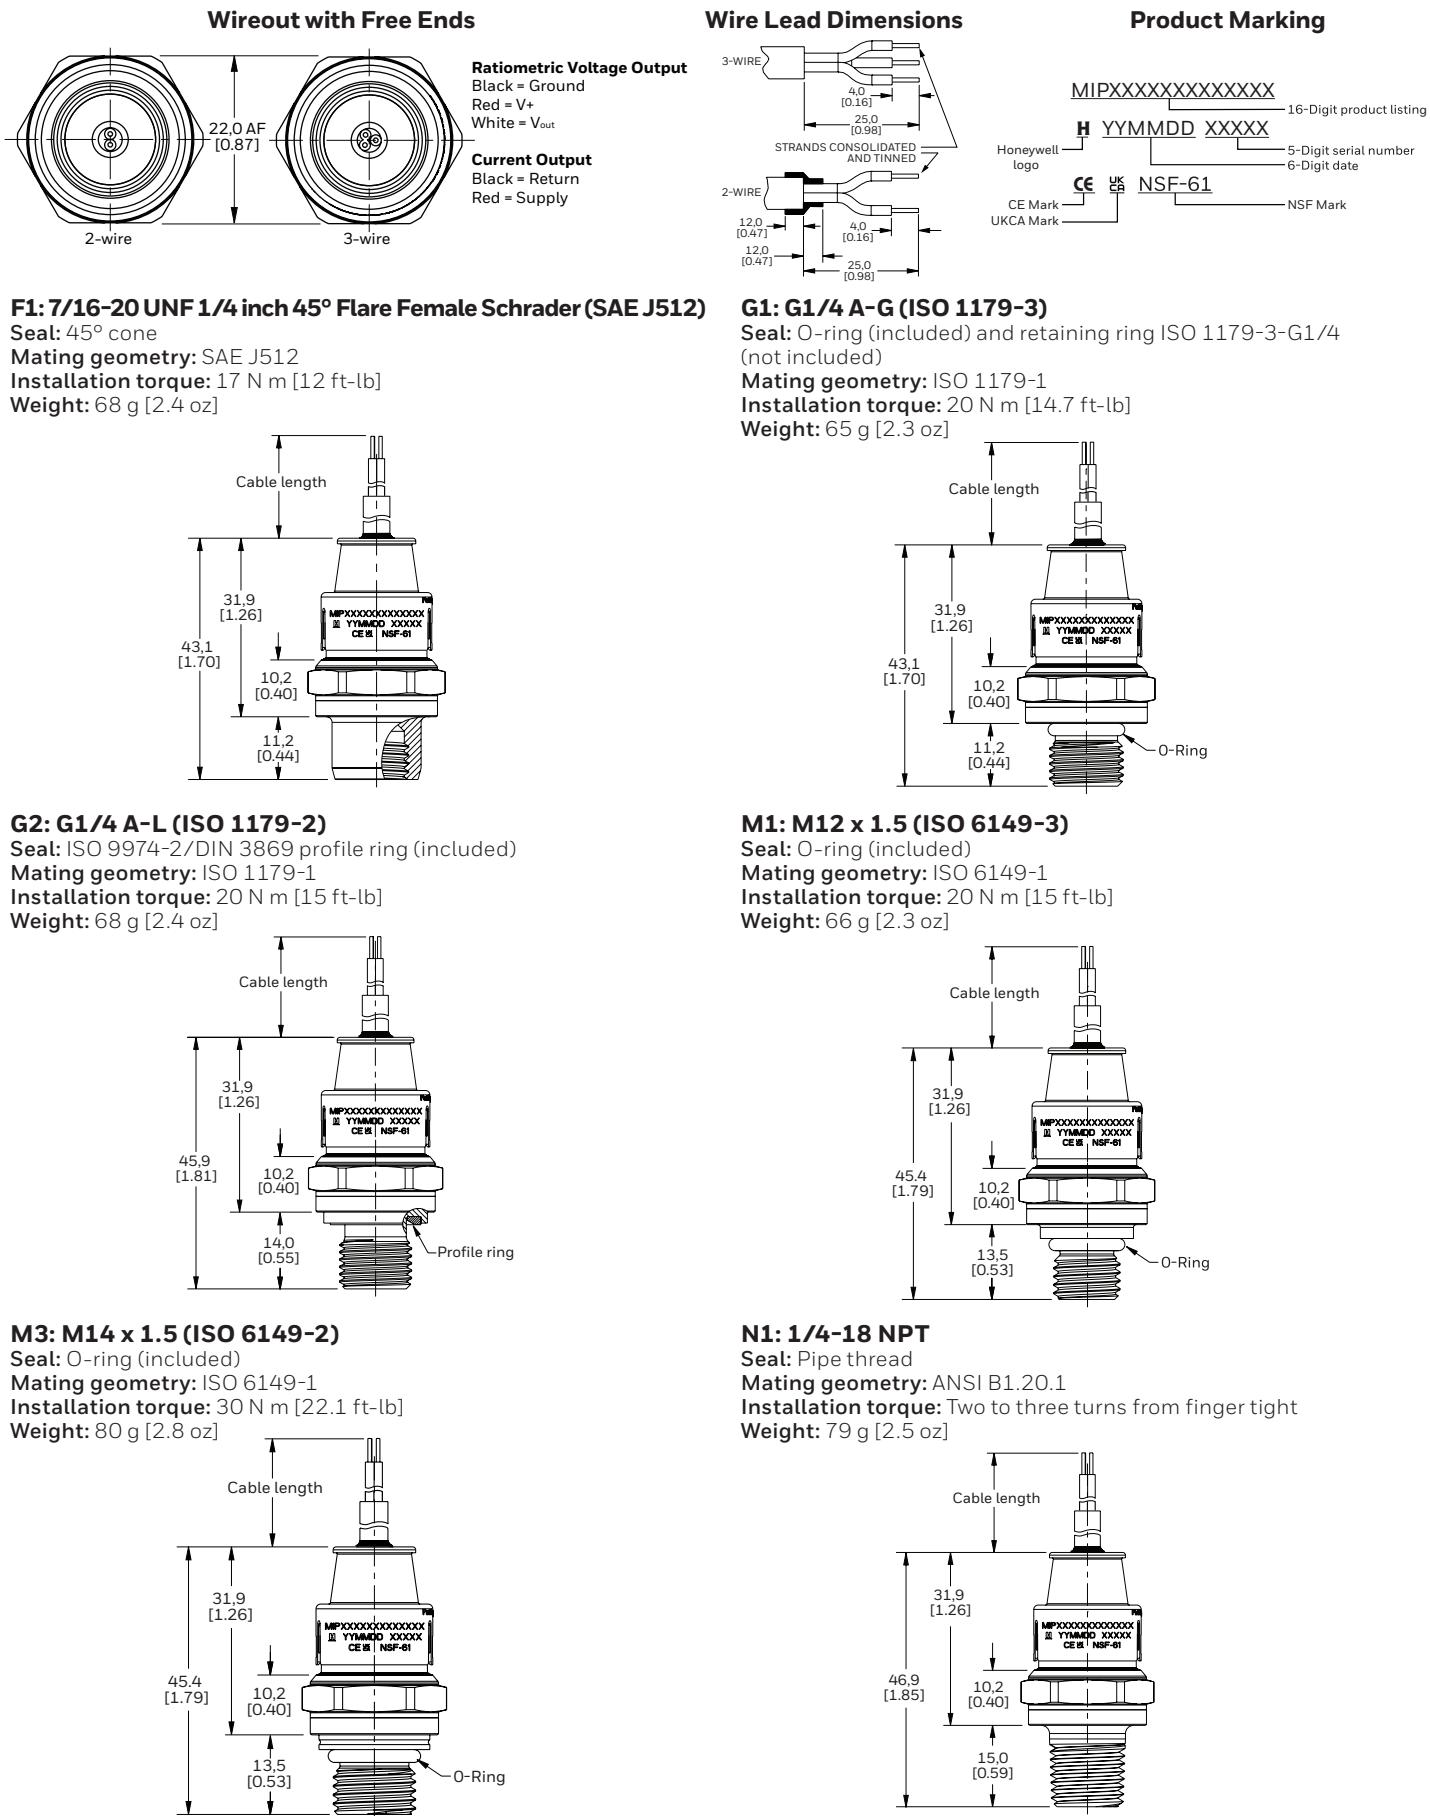

# MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS

**FIGURE 8. CABLE HARNESS MOUNTING DIMENSIONS (CONTINUED)**


**N2: 1/8-27 NPT**

Seal: Pipe thread

Mating geometry: ANSI B1.20.1

Installation torque: Two to three turns from finger tight

Weight: 62 g [2.2 oz]

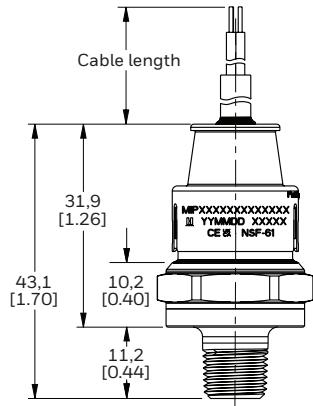


**R1: R1/4-19 BSPT (ISO 7-1)**

Seal: Pipe thread

Mating geometry: ISO 7-1

Installation torque: Two to three turns from finger tight

Weight: 77 g [2.7 oz]

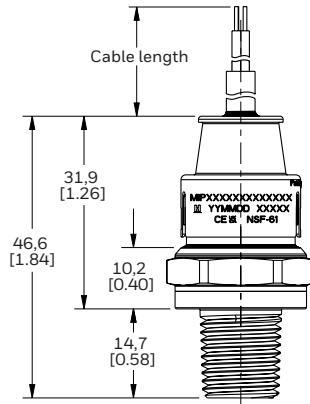


**R2: R1/8-28 BSPT (ISO 7-1)**

Seal: Pipe thread

Mating geometry: ISO 7-1

Installation torque: Two to three turns from finger tight

Weight: 70 g [2.5 oz]

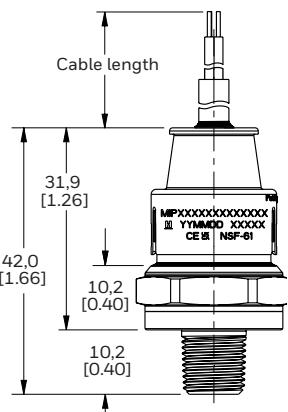


**S1: 9/16-18 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 30 N m [22.1 ft-lb]

Weight: 85 g [3.0 oz]

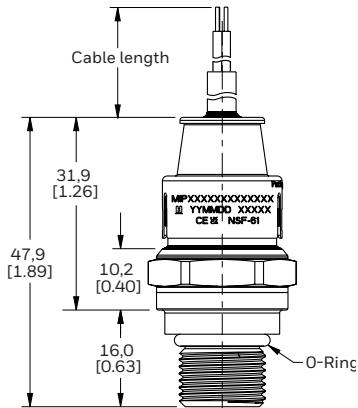


**S2: 7/16-20 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 18 N m [13.3 ft-lb]

Weight: 77 g [2.7 oz]

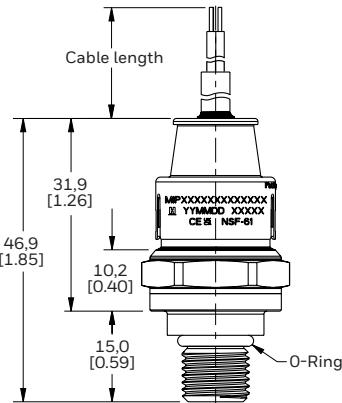


**S3: 3/8-24 UNF (SAE J1926-2)**

Seal: O-ring (included)

Mating geometry: SAE J1926-1

Installation torque: 10 N m [7.4 ft-lb]

Weight: 73 g [2.6 oz]

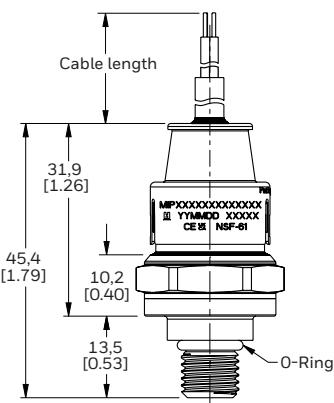

## WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective.

**The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

## FOR MORE INFORMATION

Honeywell Sensing and Safety Technologies services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit our [website](#) or call:

USA/Canada	+1 302 613 4491
Latin America	+1 305 805 8188
Europe	+44 1344 238258
Japan	+81 (0) 3-6730-7152
Singapore	+65 6355 2828
Greater China	+86 4006396841

## ⚠ WARNING PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

**Honeywell**  
**Sensing and Safety Technologies**  
830 East Arapaho Road  
Richardson, TX 75081  
[sps.honeywell.com/ast](http://sps.honeywell.com/ast)

32354483-D-EN | D | 11/22  
© 2022 Honeywell International Inc. All rights reserved.

**Honeywell**