
EKMC(VZ)series

Current Consumption 170 μ A Digital output

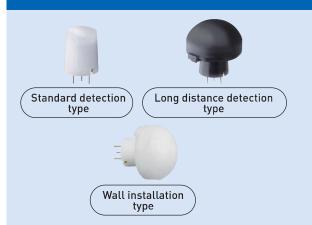

Economy type suitable for a wide range of applications

Recommended applications

Lighting control, lighting equipment, heaters, ventilators or air conditioners, security equipment for IP cameras, intrusion alarms, digital signage, vending machines, multi-function printers, display panels for meeting rooms, PCs

Lensless type available 170µA type: EKMC1600100

Specifications

| Detection performance | Model no. | Current consumption | Lens color | Output type | Detection distance | Detection area | | Detection |
|------------------------------|-------------|---------------------|-------------|-------------|---|----------------|----------|-----------|
| Detection periormance | Model IIo. | | | | | Horizontal | Vertical | zones |
| Standard detection type | EKMC1601111 | | White | Digital | 5m | 94° | 82° | 64 |
| | EKMC1601112 | 170μΑ | Black | | | | | |
| | EKMC1601113 | | Pearl white | | | | | |
| Long distance detection type | EKMC1603111 | | White | | 12m | 102° | 92° | 92 |
| | EKMC1603112 | | Black | | | | | |
| | EKMC1603113 | | Pearl white | | | | | |
| Wall installation type | EKMC1604111 | | White | | 12m (1st step lens) 6m (2nd step lens) 3m (3rd step lens) | 40° | 105° | 68 |
| | EKMC1604112 | | Black | | | | | |
| | EKMC1604113 | | Pearl white | | | | | |

■Ordering EKMC16 1 information Lens color ●PaPIRs motion sensor 0: Lensless / 1: White / ●Detection(Lens) 2: Black / 3: Pearl white 00: Lensless / 01: 5m distance standard / 03: 12m long distance / 04: Wall installation type 0: Lensless / 1: with lens

Characteristics

■Maximum rated values

| Items | Value | | |
|----------------------|---|--|--|
| Power supply voltage | -0.3 to 7V | | |
| Ambient temperature | -20 to +60℃ (no frost, no condensation) | | |
| Storage temperature | -20 to +70℃ | | |


■Floatrical characteristics

| | Etectificat characteristics | | | | | | |
|-------------------|--|-----|--------|----------------|---|--|--|
| | Items | | Symbol | EKMC (VZ) type | Conditions | | |
| Operating voltage | | Max | Vdd | 6.0V | _ | | |
| | | Min | vaa | 3.0V | _ | | |
| | Current consumption (in standby mode) Note 1) | Ave | lw | 170µA | Ambient temperature: 25°C lout=0 Vdd: 5V | | |
| | Output current (during detection) Note 2) | Max | lout | 100µA | Ambient temperature: 25°C Vout≧Vdd-0.5 | | |
| | Output voltage (during detection period) | Min | Vout | Vdd-0.5V | Ambient temperature: 25°C Open at no detection | | |
| | Circuit stability time (when voltage is applied) | Max | Twu | 30 sec | Ambient temperature: 25°C lout=0 Vdd: 5V | | |

Note 1) Current consumption during detection period is the total value of current consumption in standby mode add to output current.

Note 2) Please select an output resistors (pull-down concept) in accordance with Vout so that the output current is lower than or equal to $100\mu A$. If the output current is more than 100µA, this may cause false alarms.

Timing chart

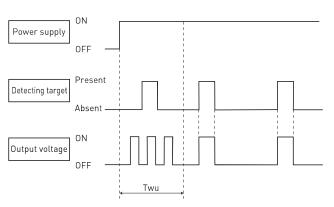

[Explanation of the timing]
Twu: Circuit stability time: max. 30 sec

During this stage, the output's status is undefined (ON/OFF) and detection is therefore not guaranteed.

Lenses for the EKMB/EKMC series

$\underset{(mm)}{\text{Dimension}}$

Detection zone


X-Y Cross Section

Detection characteristics


Standard detection type









| Detection distance | Max.5m |
|---------------------|---|
| Field of view | 94°×82° |
| Detection zone | 64 beams |
| Detection condition | |
| | ∙Movement speed: 1.0m/s |
| | •Target concept: Human body with an approx. size of 700×250mm |
| | ·Target moving direction: Crossing the detection beam. |

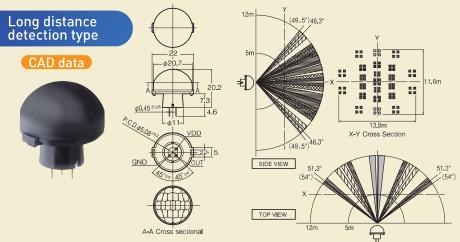

| Detection distance | Max. 12m |
|---------------------|---|
| Field of view | 102°×92° |
| Detection zone | 92 beams |
| Detection condition | •The temperature difference between the target and the surroundings must be higher than 4°C. |
| | ·Movement speed: 1.0m/s |
| | ·Target concept: Human body with an approx. size of 700×250mm |
| | ·Target moving direction: Crossing the detection beam. |

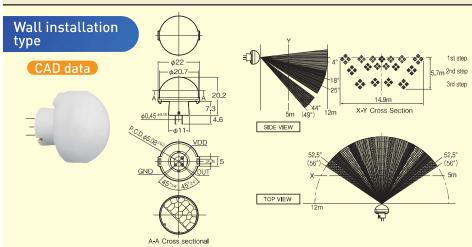

| Detection distance | 1st step lens | Max. 12m | |
|------------------------|---|----------|--|
| | 2nd step lens | Max. 6m | |
| | 3rd step lens | Max. 3m | |
| Field of view | 40°×105° | | |
| Detection zone | 68 beams | | |
| Detection condition | •The temperature difference between the target and the surroundings must be higher than 4°C. •Movement speed: 1.0m/s •Target concept: Human body with an approx. size of 700×250mm •Target moving direction: Crossing the detection beam. | | |




■PIR element





 $\ensuremath{\,\%}$ Detection sensitivity is measured by following system

■Test setup



CAD data CAD data can be downloaded from the (((PaPIRs))) PaPIRs WEB site. Please refer to the formal specification for the dimension, and the tolerance **Please note that the horizontal and vertical field of view depends on the position of the metal tab on which the lens is mounted. CAD data CAD data can be downloaded from the ((PaPIRs))) PaPIRs WEB site. Panasonic PaPIRs

Horizontally wide detection type

Current 1/2/6/170µA

Digital output




> World's first PIR with "Approach Sensing" technology

Panasonic presents the world's first PIR sensor in the shape of a hammerhead with a special optic, which is more sensitive to radial motion.



Recommended applications

Wall switches, thermostats, IP cameras, wake-up switch for displays, intrusion alarm sensors (e.g. for windows and doors), door intercom systems, entrance and garden lamps, automatic door systems, vending machines

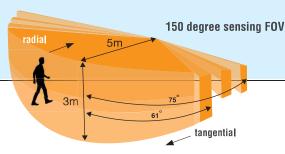

Horizontally wide detection type

| Current consumption in standby mode (1µA type: in sleep mode) | | 1μΑ | 2μΑ | бµА | 170μΑ | |
|---|-------------|--------------------------|-------------|--------------|-------------|--|
| ▶ Output | | Digital (open collector) | | | | |
| White | | EKMB1105111 | EKMB1205111 | EKMB1305111K | EKMC1605111 | |
| ▶ Lens color | Black | EKMB1105112 | EKMB1205112 | EKMB1305112K | EKMC1605112 | |
| | Pearl white | EKMB1105113 | EKMB1205113 | EKMB1305113K | EKMC1605113 | |

Dimension Detection zone CAD data by request Detection Area A Detection Area A

| Detection distance | Max. 5m* | | | |
|-----------------------|-------------------|---|--|--|
| Field of | Area A 122° x 35° | | | |
| view | Area B | 150° x 20° | | |
| Detection | Area A | 88 | | |
| zone | Area B | 16 | | |
| Detection condition A | Area A | The temperature difference between the target and the surroundings must be higher than 4°C. | | |
| | | Movement speed: 1m/s | | |
| | | Target concept: human head with an approx. size of 700x250mm | | |
| | | Target moving direction: crossing 2 detection zones | | |
| | Area B | The temperature difference between the target and the surroundings must be higher than 8°C. | | |
| | | Movement speed: 1m/s | | |
| | | Target concept: human body with an approx. size of 700x250mm | | |
| | | Target moving direction: crossing 2 detection zones | | |

Detection characteristics

- ▲ Please refer to "Cautions for use" (page 18) and "Basic principles" (page 18, point 5), for more details

Please contact your local sales representative for detailed specifications.

SECTION A-A

Standard and slight motion detection type

Current consumption 1/2/6/170µA

Digital output







> 2 functions in 1 lens


High Sensitivity Centre ZONE: Optimized for detecting small movements and small objects
Normal Sensitivity Outer ZONE: Optimized for detecting larger movements of larger objects



Recommended applications

Lighting control, heaters, ventilators or air conditioners, IP cameras, intrusion alarms, digital signage, vending machines, multi-function printers, display panels for meeting rooms, PCs

| | | | 2 | 2.2m | Standard motion detection area |
|---|-------------|---|-------------|---------------|--------------------------------|
| | | Standard and slight motion detection type Slight motion detection area | | | |
| Current consumption in standby mode (1µA type: in sleep mode) | | 1μΑ | 2μΑ | 6µА | 170μΑ |
| ▶ Output | | | Digital (op | en collector) | |
| | White | EKMB1193111 | EKMB1293111 | EKMB1393111K | EKMC1693111 |
| ▶ Lens color | Black | EKMB1193112 | EKMB1293112 | EKMB1393112K | EKMC1693112 |
| | Pearl white | EKMB1193113 | EKMB1293113 | EKMB1393113K | EKMC1693113 |

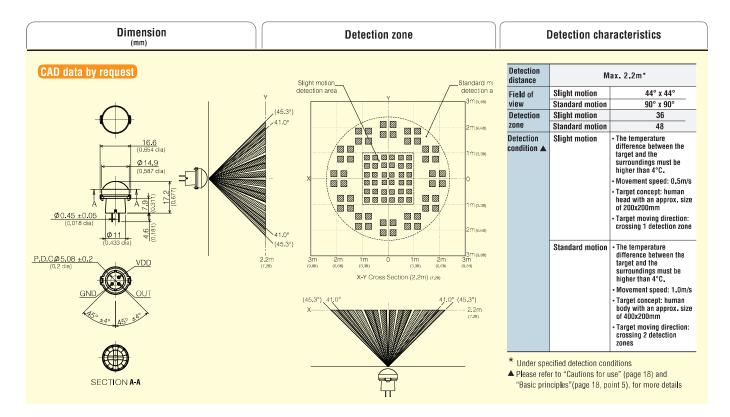

Please contact your local sales representative for detailed specifications.