


CMHZ5221B THRU CMHZ5267B

**SURFACE MOUNT
SILICON ZENER DIODE
2.4 VOLTS THRU 75 VOLTS
500mW, 5% TOLERANCE**



SOD-123 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMHZ5221B Series Silicon Zener Diode is a high quality voltage regulator, manufactured in a surface mount package, designed for use in industrial, commercial, entertainment and computer applications.

MARKING CODE: SEE MARKING CODE ON ELECTRICAL CHARACTERISTIC TABLE

MAXIMUM RATINGS:

Power Dissipation (@ $T_L=75^{\circ}\text{C}$)
Maximum Operating Junction Temperature
Storage Temperature
Thermal Resistance

SYMBOL

P_D	500	mW
T_J	+150	$^{\circ}\text{C}$
T_{stg}	-65 to +175	$^{\circ}\text{C}$
Θ_{JL}	150	$^{\circ}\text{C/W}$

UNIT

Note: V_Z Tolerance "B" suffix = $\pm 5\%$, V_Z Tolerance "C" suffix = $\pm 2\%$, V_Z Tolerance "D" suffix = $\pm 1\%$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$), $V_F=0.9\text{V MAX}$ @ $I_F=10\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE V_Z @ I_{ZT}			TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAX. TEMP. COEFF. ΘV_Z	MARKING CODE
	MIN	NOM	MAX		Z_{ZT} @ I_{ZT}	Z_{ZK} @ I_{ZK}		I_R @ V_R			
	V	V	V		Ω	Ω	mA	μA	V	$\%/^{\circ}\text{C}$	
CMHZ5221B	2.280	2.4	2.520	20	30	1200	0.25	100	1.0	-0.085	CC1
CMHZ5222B	2.375	2.5	2.625	20	30	1250	0.25	100	1.0	-0.085	CC2
CMHZ5223B	2.565	2.7	2.835	20	30	1300	0.25	75	1.0	-0.080	CC3
CMHZ5224B	2.660	2.8	2.940	20	30	1400	0.25	75	1.0	-0.080	CC4
CMHZ5225B	2.850	3.0	3.150	20	30	1600	0.25	50	1.0	-0.075	CC5
CMHZ5226B	3.135	3.3	3.465	20	28	1600	0.25	25	1.0	-0.070	CD1
CMHZ5227B	3.420	3.6	3.780	20	24	1700	0.25	15	1.0	-0.065	CD2
CMHZ5228B	3.705	3.9	4.095	20	23	1900	0.25	10	1.0	-0.060	CD3
CMHZ5229B	4.085	4.3	4.515	20	22	2000	0.25	5.0	1.0	± 0.055	CD4
CMHZ5230B	4.465	4.7	4.935	20	19	1900	0.25	5.0	2.0	± 0.030	CD5
CMHZ5231B	4.845	5.1	5.355	20	17	1600	0.25	5.0	2.0	± 0.030	CE1
CMHZ5232B	5.320	5.6	5.880	20	11	1600	0.25	5.0	3.0	+0.038	CE2
CMHZ5233B	5.700	6.0	6.300	20	7.0	1600	0.25	5.0	3.5	+0.038	CE3
CMHZ5234B	5.890	6.2	6.510	20	7.0	1000	0.25	5.0	4.0	+0.045	CE4
CMHZ5235B	6.460	6.8	7.140	20	5.0	750	0.25	3.0	5.0	+0.050	CE5
CMHZ5236B	7.125	7.5	7.875	20	6.0	500	0.25	3.0	6.0	+0.058	CF1
CMHZ5237B	7.790	8.2	8.610	20	8.0	500	0.25	3.0	6.5	+0.062	CF2
CMHZ5238B	8.265	8.7	9.135	20	8.0	600	0.25	3.0	6.5	+0.065	CF3
CMHZ5239B	8.645	9.1	9.555	20	10	600	0.25	3.0	7.0	+0.068	CF4
CMHZ5240B	9.500	10	10.50	20	17	600	0.25	3.0	8.0	+0.075	CF5
CMHZ5241B	10.45	11	11.55	20	22	600	0.25	2.0	8.4	+0.076	CH1
CMHZ5242B	11.40	12	12.60	20	30	600	0.25	1.0	9.1	+0.077	CH2
CMHZ5243B	12.35	13	13.65	9.5	13	600	0.25	0.5	9.9	+0.079	CH3
CMHZ5244B	13.30	14	14.70	9.0	15	600	0.25	0.1	10	+0.082	CH4
CMHZ5245B	14.25	15	15.75	8.5	16	600	0.25	0.1	11	+0.082	CH5
CMHZ5246B	15.20	16	16.80	7.8	17	600	0.25	0.1	12	+0.083	CJ1
CMHZ5247B	16.15	17	17.85	7.4	19	600	0.25	0.1	13	+0.084	CJ2
CMHZ5248B	17.10	18	18.90	7.0	21	600	0.25	0.1	14	+0.085	CJ3
CMHZ5249B	18.05	19	19.95	6.6	23	600	0.25	0.1	14	+0.086	CJ4
CMHZ5250B	19.00	20	21.00	6.2	25	600	0.25	0.1	15	+0.086	CJ5
CMHZ5251B	20.90	22	23.10	5.6	29	600	0.25	0.1	17	+0.087	CK1
CMHZ5252B	22.80	24	25.20	5.2	33	600	0.25	0.1	18	+0.087	CK2
CMHZ5253B	23.75	25	26.25	5.0	35	600	0.25	0.1	19	+0.089	CK3

R10 (18-January 2024)

CMHZ5221B THRU CMHZ5267B

**SURFACE MOUNT
SILICON ZENER DIODE
2.4 VOLTS THRU 75 VOLTS
500mW, 5% TOLERANCE**




ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$), $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE V _Z @ I _{ZT}			TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAX. TEMP. COEFF.	MARKING CODE
	MIN	NOM	MAX	I _{ZT}	Z _{ZT} @I _{ZT}	Z _{ZK} @ I _{ZK}	I _R @ V _R	θV _Z			
	V	V	V	mA	Ω	Ω mA	μA V	%/°C			
CMHZ5254B	25.65	27	28.35	4.6	41	600 0.25	0.1 21	+0.090	CK4		
CMHZ5255B	26.60	28	29.40	4.5	44	600 0.25	0.1 21	+0.091	CK5		
CMHZ5256B	28.50	30	31.50	4.2	49	600 0.25	0.1 23	+0.091	CM1		
CMHZ5257B	31.35	33	34.65	3.8	58	700 0.25	0.1 25	+0.092	CM2		
CMHZ5258B	34.20	36	37.80	3.4	70	700 0.25	0.1 27	+0.093	CM3		
CMHZ5259B	37.05	39	40.95	3.2	80	800 0.25	0.1 30	+0.094	CM4		
CMHZ5260B	40.85	43	45.15	3.0	93	900 0.25	0.1 33	+0.095	CM5		
CMHZ5261B	44.65	47	49.35	2.7	105	1000 0.25	0.1 36	+0.095	CN1		
CMHZ5262B	48.45	51	53.55	2.5	125	1100 0.25	0.1 39	+0.096	CN2		
CMHZ5263B	53.20	56	58.80	2.2	150	1300 0.25	0.1 43	+0.096	CN3		
CMHZ5264B	57.00	60	63.00	2.1	170	1400 0.25	0.1 46	+0.097	CN4		
CMHZ5265B	58.90	62	65.10	2.0	185	1400 0.25	0.1 47	+0.097	CN5		
CMHZ5266B	64.60	68	71.40	1.8	230	1600 0.25	0.1 52	+0.097	CP1		
CMHZ5267B	71.25	75	78.75	1.7	270	1700 0.25	0.1 56	+0.098	CP2		

Higher Zener voltages may be available upon request. Please consult factory.

SOD-123 CASE - MECHANICAL OUTLINE

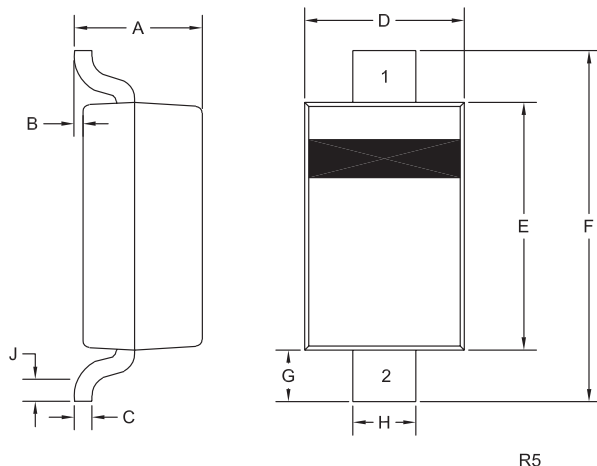

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.037	0.053	0.95	1.35
B	0.000	0.005	0.00	0.12
C	-	0.008	-	0.20
D	0.055	0.071	1.40	1.80
E	0.098	0.110	2.50	2.80
F	0.142	0.154	3.60	3.90
G	0.016	-	0.40	-
H	0.020	0.028	0.50	0.70
J	0.010	-	0.25	-

SOD-123 (REV:R5)

LEAD CODE:

- 1) Cathode
- 2) Anode

R10 (18-January 2024)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms