

EM-1011

Shipped in packet-tape reel(5000pcs/Reel)



EM-1011 is ultra-small Hall effect ICs of a single silicon chip composed of Hall element and a signal processing IC.

Bipolar Hall
Effect LatchSupply Voltage
3.5~18VHall Element
Continuous
ExcitationHigh Sensitivity
Bop:3mTOutput
Open Drain

SMT

Notice: It is requested to read and accept "IMPORTANT NOTICE" written on the back of the front cover of this catalogue.

●Operational Characteristics

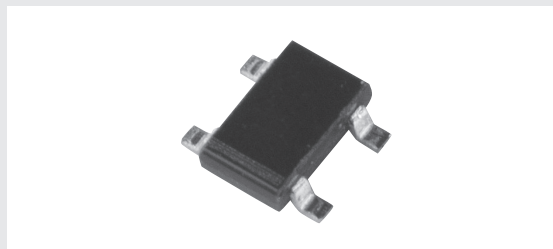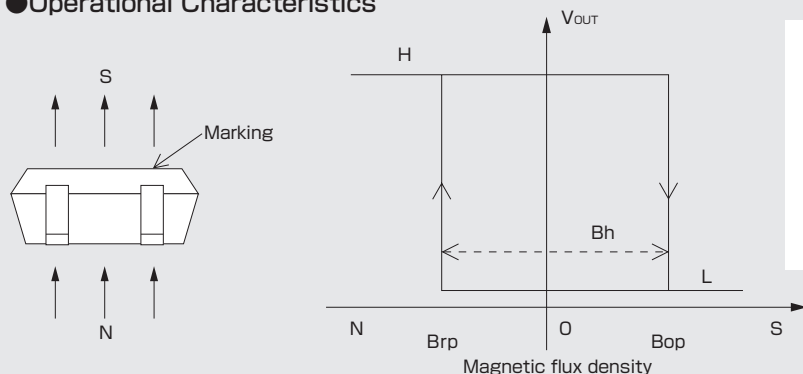


●Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Min.	Max.	Unit
Supply Voltage	V _{DD}	-0.3	25	V
Output Current	I _{SINK}	0	12	mA
Output Supply Voltage	V _{OUT}	-0.3	+25	mV
Storage Temperature Range	T _{STG}	-40	+125	°C

●Recommended Operating Conditions

Item	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	V _{DD}	3.5	12	18	V
Operating Temperature Range	T _{opr}	-30	+25	+115	°C

●Functional Block Diagram

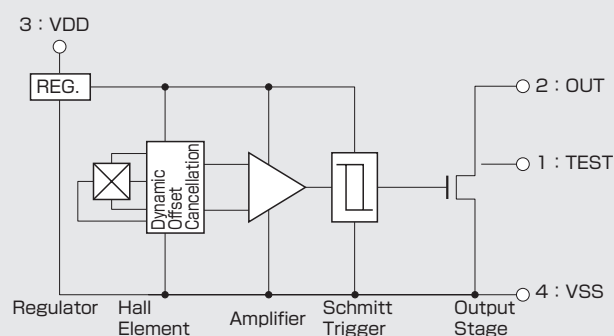


●Magnetic and Electrical Characteristics (Ta=25°C V_{DD}=12V)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Operating Point	B _{op}		0.5	3	6	mT
Releasing Point	B _{rp}		-6	-3	-0.5	mT
Hysteresis	B _h		1	6	12	mT
Output Saturation Voltage	V _{SAT}	OUT="L" I _{SINK} =10mA		0.2	0.4	V
Output Leakage Current	I _{LEAK}	OUT="H"			1	μA
Supply Current	I _{DD}	OUT="H"	0.5	3	6	mA

1 [mT] = 10 [Gauss]

•Please be aware that our products are not intended for use in life support equipment, devices, or systems. Use of our products in such applications requires the advance written approval of our sales staff.
Certain applications using semiconductor devices may involve potential risks of personal injury, property damage or loss of life. In order to minimize these risks, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards. Inclusion of our products in such applications is understood to be fully at the risk of the customer using our devices or systems.


●Package (Unit:mm)

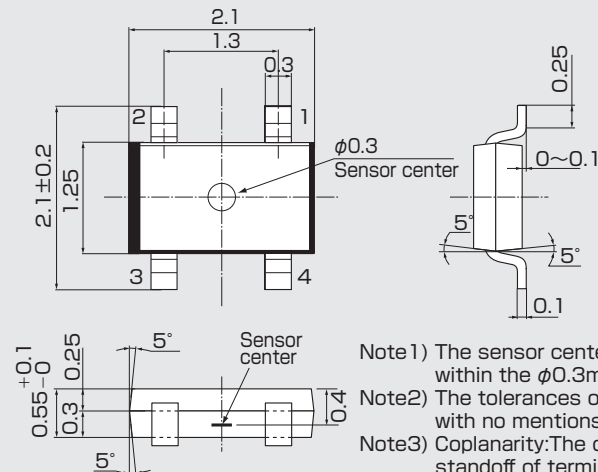


Pin No.	Pin Name	Function	Note
1	TEST	TEST	N.C
2	OUT	Output	
3	VDD	Power Supply	
4	VSS	Ground	

- Note1) The sensor center is located within the $\phi 0.3\text{mm}$ circle.
Note2) The tolerances of dimensions with no mentions is $\pm 0.1\text{mm}$.
Note3) Coplanarity: The differences between standoff of terminals are max. 0.1mm .
Note4) The sensor part is located 0.4mm (typ.) far from marking surface.


●(For reference only)Land Pattern (Unit:mm)

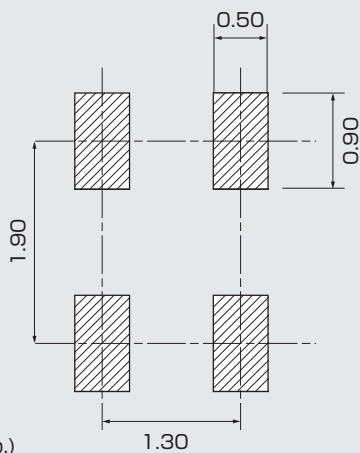


●Output during start-up period

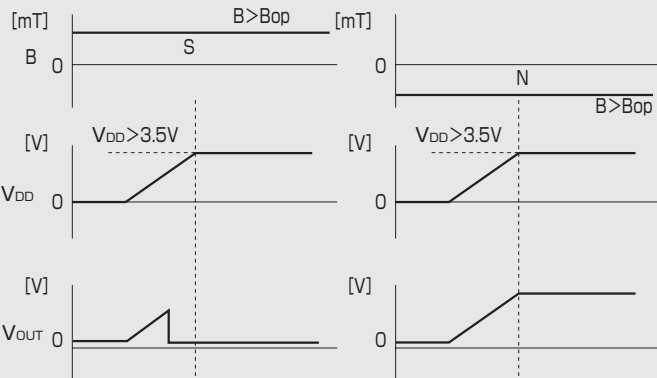


●Application Circuit

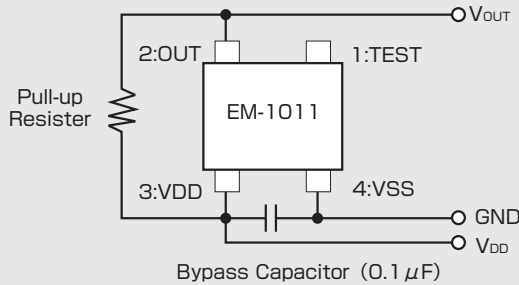

●Supply Voltage

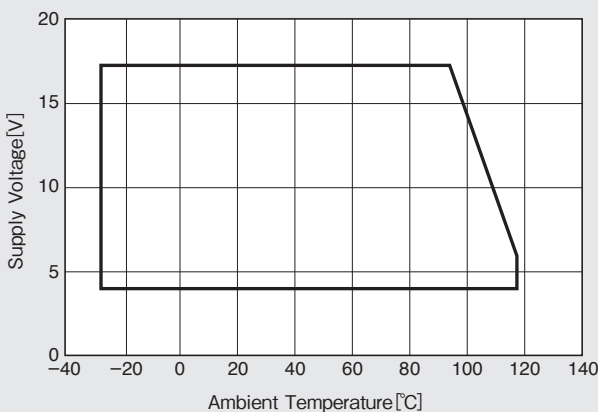

●Temperature Dependence of Bop, Brp

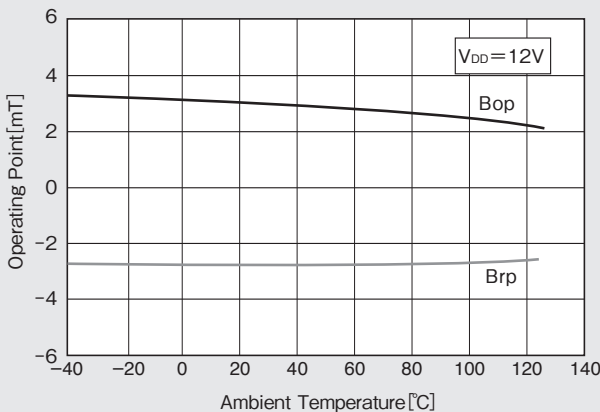

IMPORTANT NOTICE

- These products and their specifications are subject to change without notice. When you consider any use or application of these products, please make inquiries the sales office of Asahi Kasei Microdevices Corporation (AKM) or authorized distributors as to current status of the products.
- Descriptions of external circuits, application circuits, software and other related information contained in this document are provided only to illustrate the operation and application examples of the semiconductor products. You are fully responsible for the incorporation of these external circuits, application circuits, software and other related information in the design of your equipments. AKM assumes no responsibility for any losses incurred by you or third parties arising from the use of these information herein. AKM assumes no liability for infringement of any patent, intellectual property, or other rights in the application or use of such information contained herein.
- Any export of these products, or devices or systems containing them, may require an export license or other official approval under the law and regulations of the country of export pertaining to customs and tariffs, currency exchange, or strategic materials.
- AKM products are neither intended nor authorized for use as critical components^{Note1)} in any safety, life support, or other hazard related device or system^{Note2)}, and AKM assumes no responsibility for such use, except for the use approved with the express written consent by Representative Director of AKM. As used here:
 - Note1) A critical component is one whose failure to function or perform may reasonably be expected to result, whether directly or indirectly, in the loss of the safety or effectiveness of the device or system containing it, and which must therefore meet very high standards of performance and reliability.
 - Note2) A hazard related device or system is one designed or intended for life support or maintenance of safety or for applications in medicine, aerospace, nuclear energy, or other fields, in which its failure to function or perform may reasonably be expected to result in loss of life or in significant injury or damage to person or property.
- It is the responsibility of the buyer or distributor of AKM products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the above content and conditions, and the buyer or distributor agrees to assume any and all responsibility and liability for and hold AKM harmless from any and all claims arising from the use of said product in the absence of such notification.

February 21, 2013