

G3VM-□AR□/□DR□

MOS FET Relays DIP 4-pin, High-current and Low-ON-resistance Type

MOS FET Relays in DIP 4-pin packages that achieve the low ON resistance and high switching capacity of a mechanical relay

- Load voltage: 20 V, 30V, 40 V, 60 V, 100 V, or 200 V
- 20-V Relay: Continuous load current of 3 A max.
- 30-V Relay: Continuous load current of 4 A max.
- 40-V Relay: Continuous load current of 2.5 A max.
- 60-V Relay: Continuous load current of 3 A max.
- 100-V Relay: Continuous load current of 2 A max.
- 200-V Relay: Continuous load current of 0.7 A max.




Note: The actual product is marked differently from the image shown here.

Application Examples


- Communication equipment
- Security equipment
- Power circuit
- Test & Measurement equipment
- Industrial equipment

Package (Unit : mm, Average)

DIP 4-pin
PCB Terminals



Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage

- 2 : 20 V
- 3 : 30 V
- 4 : 40 V
- 6 : 60 V
- 10 : 100 V
- 20 : 200 V

4. Additional functions

- R: Low ON resistance

2. Contact form

- 1 : 1a (SPST-NO)

3. Package

- A : DIP 4-pin with PCB terminals
- D : DIP 4-pin with surface-mounting terminals

5. Other informations

When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging			Tape packaging	
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB Terminals	Surface-mounting Terminals		Surface-mounting Terminals	
DIP4	1a (SPST-NO)	20 V	3 A	G3VM-21AR	G3VM-21DR	100 pcs.	G3VM-21DR(TR)	1,500 pcs.
		30 V	4 A	G3VM-31AR	G3VM-31DR		G3VM-31DR(TR05)	500 pcs.
		40 V	2.5 A	G3VM-41AR	G3VM-41DR		G3VM-41DR(TR)	1,500 pcs.
		60 V	2 A	G3VM-61AR	G3VM-61DR		G3VM-61DR(TR)	1,500 pcs.
			3 A	G3VM-61AR1	G3VM-61DR1		G3VM-61DR1(TR05)	500 pcs.
		100 V	1 A	G3VM-101AR	G3VM-101DR		G3VM-101DR(TR)	1,500 pcs.
			2 A	G3VM-101AR1	G3VM-101DR1		G3VM-101DR1(TR05)	500 pcs.
		200 V	0.7 A	G3VM-201AR	G3VM-201DR		G3VM-201DR(TR05)	500 pcs.

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	G3VM-21AR G3VM-21DR	G3VM-31AR G3VM-31DR	G3VM-41AR G3VM-41DR	G3VM-61AR G3VM-61DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR G3VM-101DR	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit	Measurement conditions
Input	LED forward current	I _F	30								mA	
	Repetitive peak LED forward current	I _{FP}	1								A	100 μs pulses, 100 pps
	LED forward current reduction rate	ΔI _F /°C	-0.3								mA/°C	Ta ≥ 25°C
	LED reverse voltage	V _R	5	6	5		6	5	6		V	
	Connection temperature	T _J	125								°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	20	30	40	60	60	100		200	V	
	Continuous load current (AC peak/DC)	I _o	3	4	2.5	2	3	1	2	0.7	A	
	ON current reduction rate	ΔI _o /°C	-30	-40	-25	-20	-30	-10	-20	-7	mA/°C	Ta ≥ 25°C
	Pulse ON current	I _{op}	9	9	7.5	6	9	3	6	2.1	A	t=100 ms, Duty=1/10
	Connection temperature	T _J	125								°C	
Dielectric strength between I/O *		V _{I-O}	2,500								V _{rms}	AC for 1 min
Ambient operating temperature		T _a	-40 to +85	-40 to +110	-40 to +85		-40 to +110	-40 to +85	-40 to +110		°C	With no icing or condensation
Ambient storage temperature		T _{stg}	-55 to +125								°C	
Soldering temperature		—	260								°C	10 s

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


DIP

G3VM-□AR□/□DR□

Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-21AR G3VM-21DR	G3VM-31AR G3VM-31DR	G3VM-41AR G3VM-41DR	G3VM-61AR G3VM-61DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR G3VM-101DR	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit	Measurement conditions	
Input	LED forward voltage	V _F	Minimum	1.18	1.5	1.18		1.5	1.18	1.5		V	I _F =10 mA	
			Typical	1.33	1.64	1.33		1.64	1.33	1.64				
			Maximum	1.48	1.8	1.48		1.8	1.48	1.8				
	Reverse current	I _R	Maximum	10									μA	V _R =5 V
	Capacitance between terminals	C _T	Typical	70									pF	V=0, f=1 MHz
	Trigger LED forward current	I _{FT} (I _{FC})	Typical	0.7	0.3	0.5		0.3	0.5	0.4	0.3	mA	G3VM-201AR/201DR: I _o =0.7A Others: I _o =1A	
Maximum			3											
Release LED forward current	I _{FC} (I _{FT})	Minimum	0.1									mA	I _{OFF} =10 μA	
		Typical	0.1	0.2	0.1		0.2	0.1	0.2					
Output	Maximum resistance with output ON	R _{ON}	Typical	40	25	50	80	45	250	110	900	mΩ	G3VM-31AR/31DR I _F =5mA, t<1s, I _o =4A G3VM-61AR1/61DR1 I _F =5mA, t<1s, I _o =3A G3VM-21AR/21DR/ 41AR/41DR/61AR/ 61DR/101AR1/101DR1: I _F =5mA, t<1s, I _o =2A G3VM-101AR/101DR: I _F =5mA, t<1s, I _o =1A G3VM-201AR/201DR: I _F =5mA, t<1s, I _o =0.7A	
			Maximum	80	50	150	200	100	700	200	2000			
	Current leakage when the relay is open	I _{LEAK}	Typical	—	0.01	—		0.005	—	0.01	0.04	μA		V _{OFF} =Load voltage ratings
			Maximum	1										
	Capacitance between terminals	C _{OFF}	Typical	300	450	300	250		200	110		pF	V=0, f=1 MHz	
	Capacitance between I/O terminals	C _{I-O}	Typical	0.8									pF	f=1 MHz, V _S =0 V
Insulation resistance between I/O terminals	R _{I-O}	Minimum	1000									MΩ	V _{I-O} =500 VDC, RoH≤60%	
		Typical	10 ⁸											
Turn-ON time	t _{ON}	Typical	1	0.6	0.8		0.45	0.8	0.4	0.13	ms	I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *		
		Maximum	5	3	5		2	5	2	1				
Turn-OFF time	t _{OFF}	Typical	0.3				0.2	0.3	0.2	0.14				
		Maximum	1						0.5					

* Turn-ON and Turn-OFF Times



Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.
Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol		G3VM-21AR G3VM-21DR	G3VM-31AR G3VM-31DR	G3VM-41AR G3VM-41DR	G3VM-61AR G3VM-61DR	G3VM-61AR1 G3VM-61DR1	G3VM-101AR G3VM-101DR	G3VM-101AR1 G3VM-101DR1	G3VM-201AR G3VM-201DR	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	16	24	32	48		80		160	V
Operating LED forward current	I _F	Minimum	5								mA
		Typical	10								
		Maximum	25								
Continuous load current (AC peak/DC)	I _O	Maximum	3	4	2.5	2	3	1	2	0.7	A
Ambient operating temperature	T _a	Minimum	-20								°C
		Maximum	65	85	65		85	65	85		

Spacing and Insulation


Item	Minimum	Unit
Creepage distances	7.0	mm
Clearance distances	7.0	
Internal isolation thickness	0.4	

DIP
G3VM-AR/DR


Engineering Data

LED forward current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

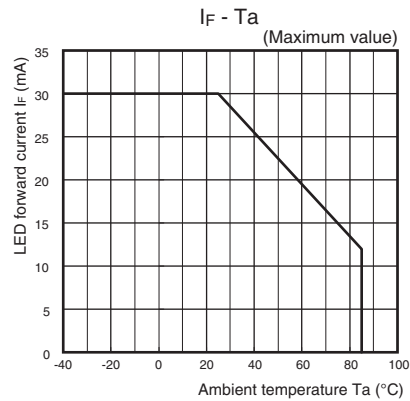


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

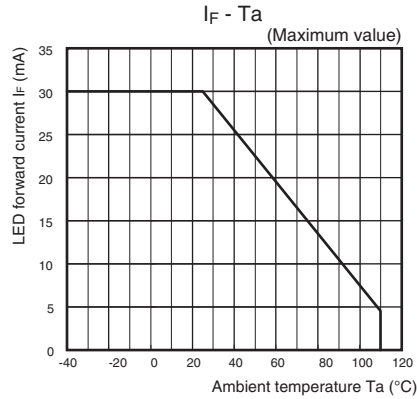


Continuous load current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

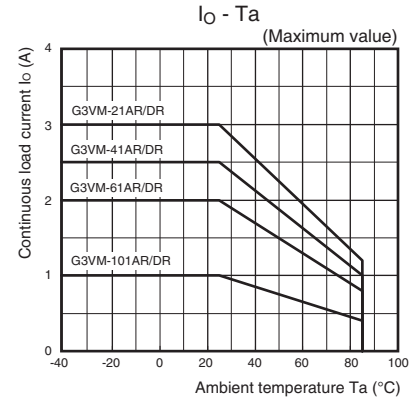


LED forward current vs. LED forward voltage

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

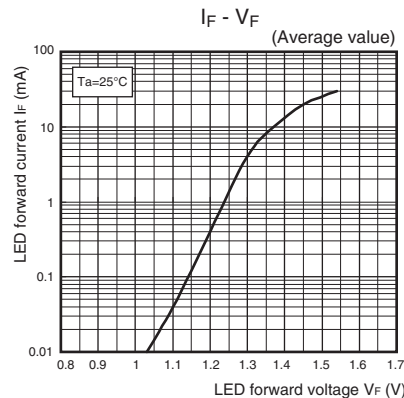


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

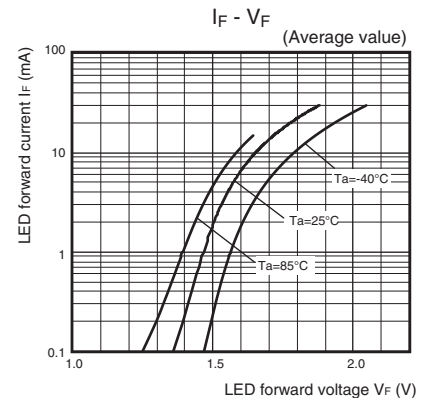


Continuous load current vs. On-state voltage


G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

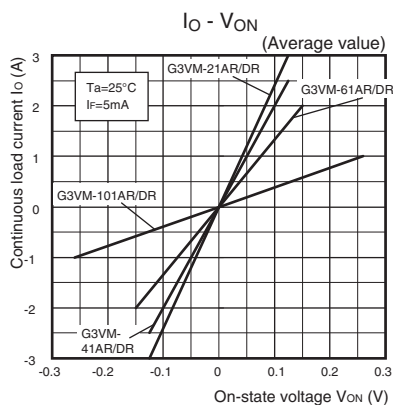

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1

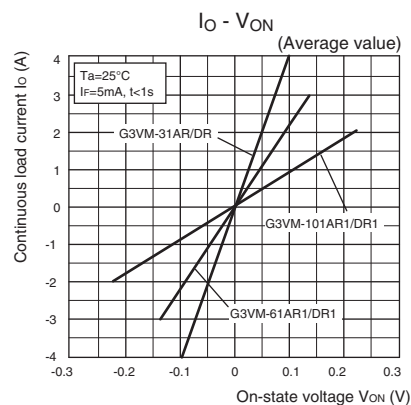


G3VM-201AR/201DR

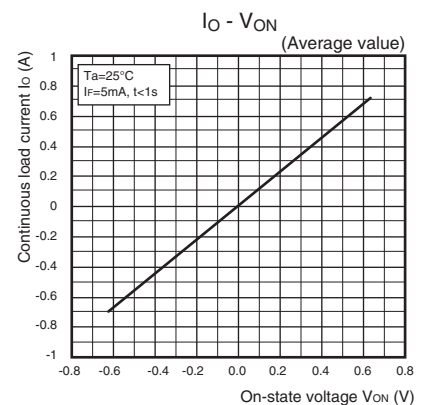


Engineering Data

On-state resistance vs. Ambient temperature


G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

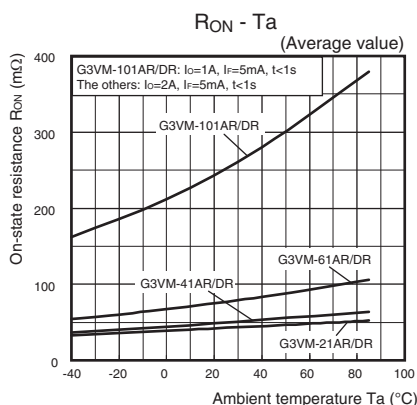

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

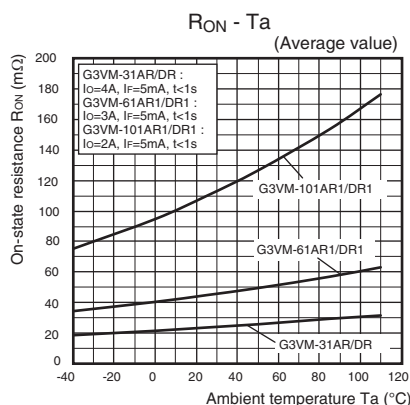


G3VM-201AR/201DR

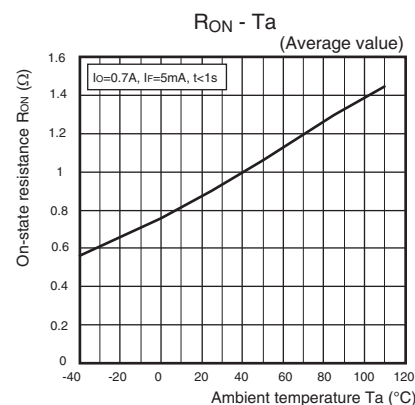


Trigger LED forward current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

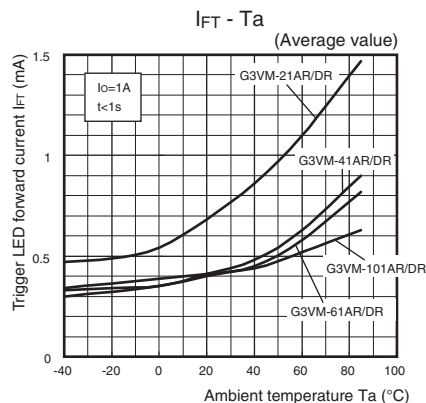


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

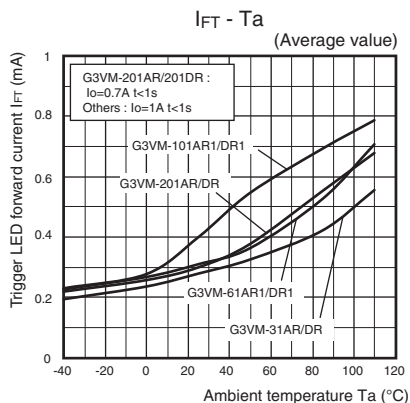


Turn ON, Turn OFF time vs. LED forward current


G3VM-21AR/21DR/41AR/41DR

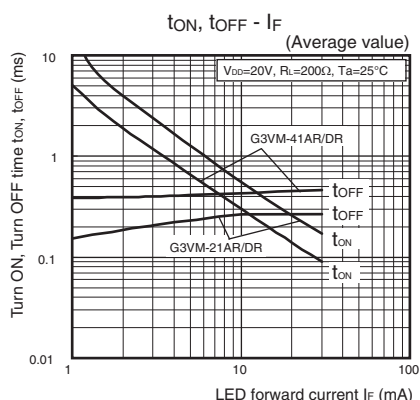

G3VM-61AR/61DR/101AR/101DR

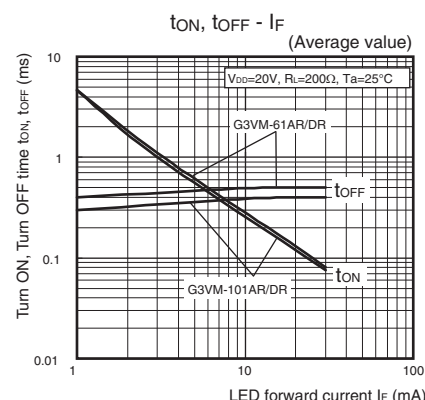

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

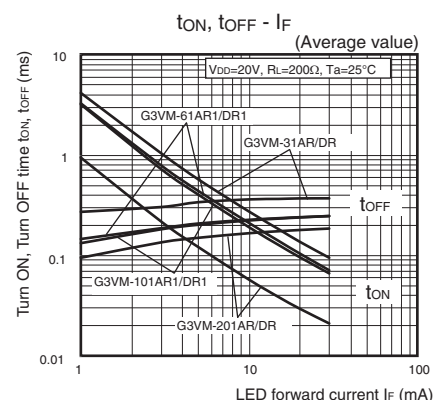


DIP


G3VM-□AR□/□DR□

Engineering Data


Turn ON, Turn OFF time vs. Ambient temperature
G3VM-21AR/21DR/41AR/41DR

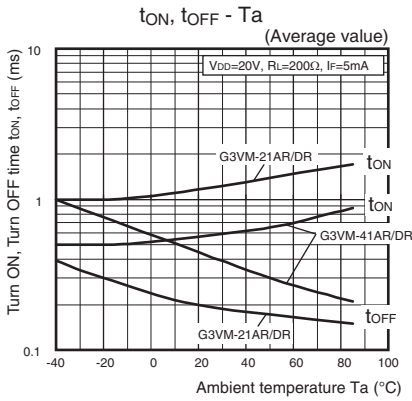


G3VM-61AR/61DR/101AR/101DR

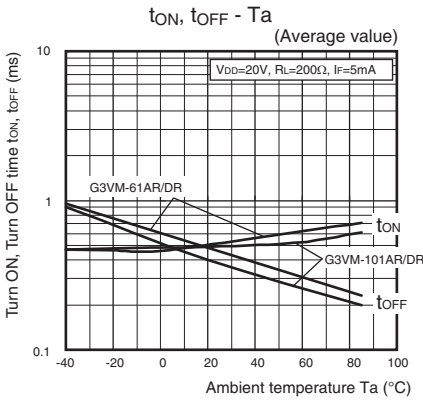


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

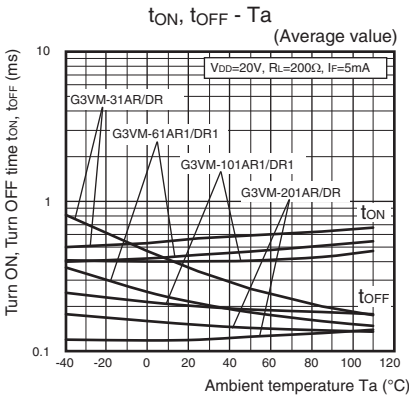

Current leakage vs. Ambient temperature
G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

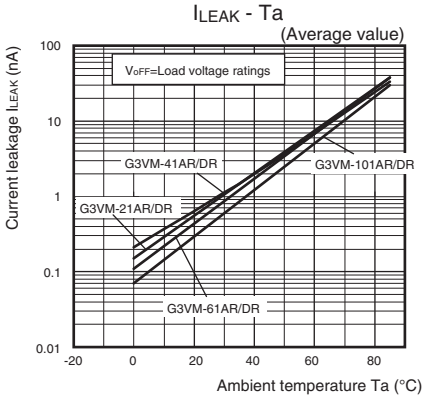

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

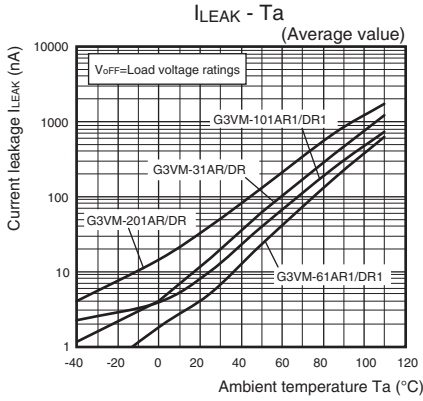


Appearance / Terminal Arrangement / Internal Connections


Appearance

DIP (Dual Inline Package)

DIP 4-pin

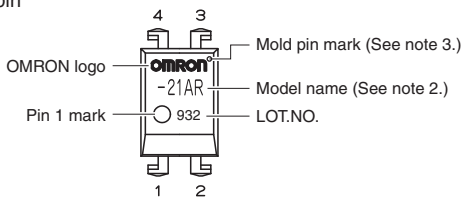

Terminal Arrangement/Internal Connections (Top View)




- Note: 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


Dimensions (Unit: mm)




PCB Terminals
Weight: 0.25 g

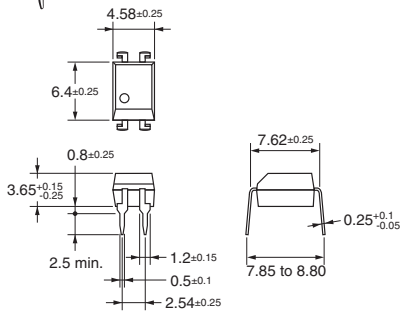


Surface-mounting Terminals
Weight: 0.25 g

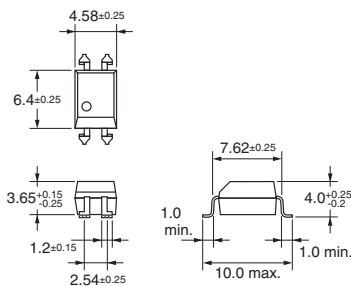

PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions
(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

Approved Standards

UL recognized



Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

DIP

G3VM-AR/DR

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact	
Americas https://components.omron.com/us	Europe https://components.omron.com/eu
Asia-Pacific https://components.omron.com/ap	China https://components.omron.com.cn
Korea https://components.omron.com/kr	Japan https://components.omron.com/jp