


Photologic® Slotted Optical Switch

OPB615, OPB616, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series



Features:

- Non-contact switching
- Printed circuit board mounting
- Enhanced signal to noise ratio
- Choice of four Logical output options

Description:

Each slotted optical switch consists of an 890 nm, infrared Light Emitting Diode (LED) and a monolithic integrated circuit that incorporates a voltage regulator, photodiode, a linear amplifier and a Schmitt trigger on a single silicon chip.

All devices in this series exhibit performance over supply voltages ranging from 4.5 V to 16.0 V and may be specified as Buffered or Inverted with 10 K Ω Pull-up or Open Collector output. Devices are also TTI/LST TL compatible and can drive up to 10 TTL loads.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:

- Mechanical switch replacement
- Speed indication (tachometer)
- Mechanical limit indication
- Edge sensing

Ordering Information					
Part Number	Package Style	Sensor Photologic®	Aperture Emitter / Sensor	Slot Width / Depth	Lead Length / Spacing
OPB615	N	10k Pull-up	None	0.150" / 0.240"	0.100" (min) / 0.275"
OPB616		Open Collector			
OPB618		Inv-Open Collector			
OPB625		10k Pull-up		0.190" / 0.285"	0.100" (min) / 0.320"
OPB626		Open Collector			
OPB627		Inv-10k Pull-up			
OPB628		Inv-Open Collector			
OPB665N		10k Pull-up	0.05" / 0.01"	0.125" / 0.345"	
OPB666N		Open Collector			
OPB667N		Inv-10k Pull-Up			



RoHS

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch


OPB615, OPB616, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series




OPB615/625/665N Buffered 10K Pull-Up

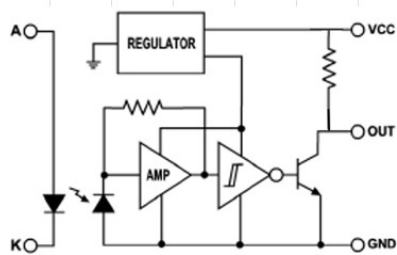


With Light
Output — High

OPB616/626/666N Buffered Open-Collector

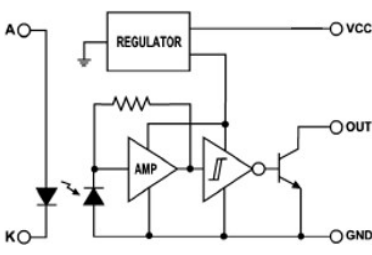


OPB618/627/667N Inverted 10K Pull-Up

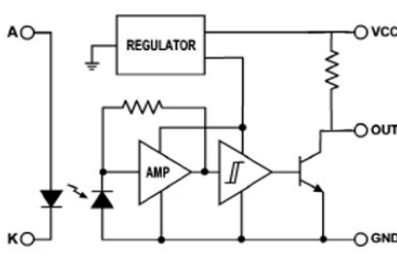


With Light
Output — Low

OPB618/628 Inverted Open-Collector

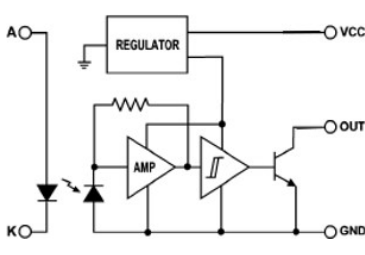

OPB615, OPB616, OPB618

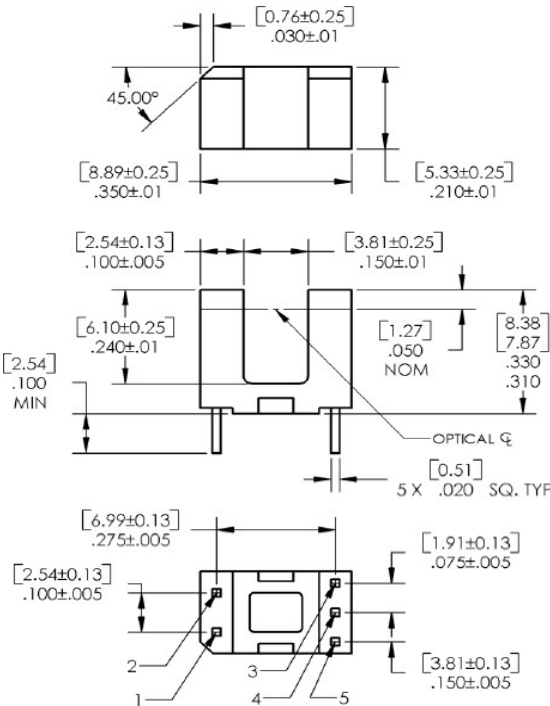

Pin Color/ Number	Description
1	Anode
2	Cathode
3	V _{CC}
4	Output
5	Ground

[MILLIMETERS]
DIMENSIONS ARE IN:
INCHES

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch

OPB615, OPB616, OPB618 Series


OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series



OPB625, OPB626, OPB627, OPB628

Pin Color/ Number	Description
1	Anode
2	Cathode
3	V _{CC}
4	Output
5	Ground

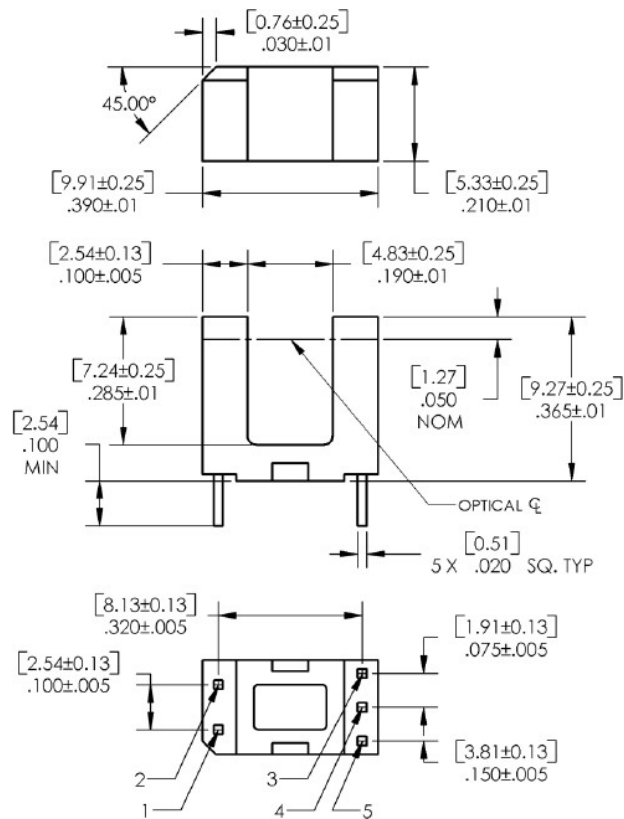

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch


OPB615, OPB616, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series



OPB665N, OPB666N, OPB667N

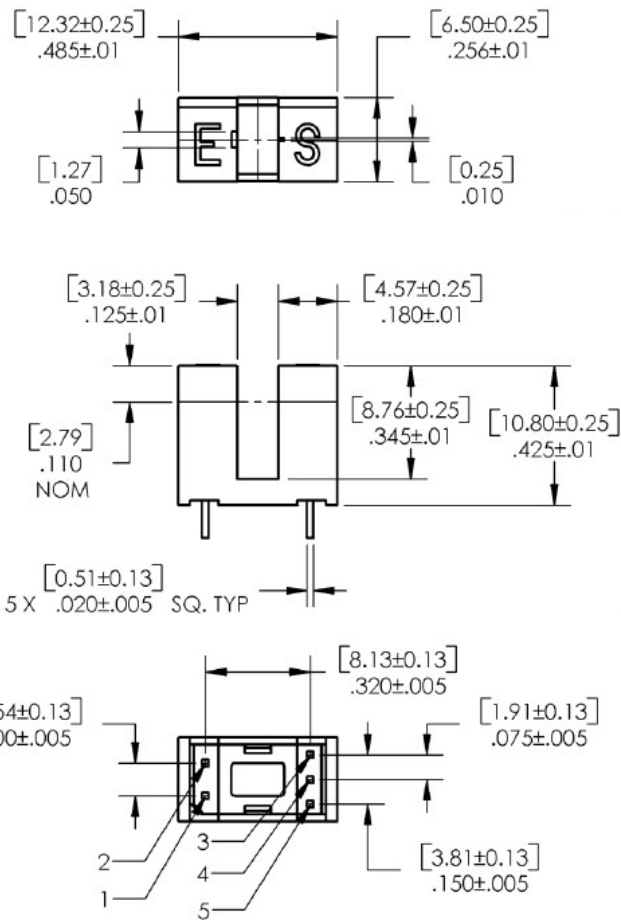

Pin Color/ Number	Description
1	Anode
2	Cathode
3	V _{CC}
4	Output
5	Ground

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch

OPB615, OPB616, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series



Electrical Specifications

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage & Operating Temperature Range	-40° C to +100° C
Lead Soldering Temperature (1/16 inch (1.6 mm) from the case for 5 sec. with soldering iron) ⁽¹⁾	260° C
Input Diode	
Forward DC Current	50 mA
Peak Forward Current (1 μs pulse width, 300 pps)	3 A
Reverse DC Voltage	3 V
Power Dissipation ⁽²⁾	100 mW
Output Photologic®	
Supply Voltage, V_{CC}	18 V
Duration of Output Short to V_{CC}	1 second
Voltage at Output ⁽⁵⁾	V_{CC}
Low Level Output Current (sinking)	16 mA
Power Dissipation ⁽³⁾	200 mW

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) Derate linearly 1.07 mW/° C above 25° C.
- (3) Derate linearly 2.50 mW/° C above 25° C.
- (4) Normal application would be with light source blocked, simulated by $I_F = 0\text{ mA}$.
- (5) Open Collector devices = 30 volts.

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode						
V_F	Forward Voltage	1.0	-	1.6	V	$I_F = 10\text{ mA}$
I_R	Reverse Current	-	-	100	μA	$V_R = 3\text{ V}$
Output Photologic® Sensor						
V_{CC}	Operating DC Supply Voltage	4.5	-	16	V	
$I_{F(+)}$	LED Positive-Going	0.1	0.55	3	mA	$V_{CC} = 5\text{ V}$
	Threshold Current	0.1	0.6	3		
		0.1	1.6	10		
$I_{F(+)} / I_{F(-)}$	Hysteresis	1.05	1.20	1.90	-	$V_{CC} = 5\text{ V}$

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch

OPB615, OPB616, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series



Electrical Specifications

Electrical Characteristics (T_A = 25° C unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Output Photologic® Sensor						
I _{CCH}	High Level Supply Current:					
	Buffer, 10k Pull-up OPB615, 625, 665	-	5	12	mA	NO LOAD on Output
	Buffer, Open-Collector OPB616, 626, 666	-	5	12		I _F = 5 mA
	Inverted, 10k Pull-up OPB618, 627, 667	-	4	12	mA	NO LOAD on Output ⁽⁴⁾
I _{CCL}	Inverted, Open-Collector OPB618, 628	-	4	12		I _F = 0 mA
	Low Level Supply Current:					
	Buffer, 10k Pull-up OPB615, 625, 665	-	5.5	12	mA	NO LOAD on Output ⁽⁴⁾
	Buffer, Open-Collector OPB616, 626, 666	-	4.0	12		I _F = 0 mA
	Inverted, 10k Pull-up OPB667	-	6.5	12		NO LOAD on Output, I _F = 10 mA
	Inverted, 10k Pull-up OPB618, 627	-	6.5	12	mA	NO LOAD on Output, I _F = 5 mA
V _{OH}	Inverted, Open-Collector OPB618, 628	-	5.0	12		NO LOAD on Output, I _F = 5 mA
	High Level Output Voltage:					
	Buffer, 10k Pull-up OPB615, 625, 665	V _{CC} -1.0	-	-	V	I _{OH} = 100 µA, I _F = 5 mA
	Buffer, Open-Collector OPB616, 626, 666	-	-	-		
I _{OH}	Inverter, 10k Pull-up OPB618, 627, 667	V _{CC} -1.0	-	-	V	I _{OH} = 100 µA, I _F = 0 mA ⁽⁴⁾
	Inverter, Open-Collector OPB618, 628	-	-	-		
I _{OL}	High Level Output Voltage:					
	Buffer, Open-Collector OPB616, 626, 666	-	-	100	µA	V _{OH} = 30 V, I _F = 5 mA
V _{OL}	Inverter, Open-Collector OPB618, 628	-	-	100	µA	I _F = 0 mA ⁽⁴⁾ , V _{OH} = 30 V
	Low Level Output Voltage:					
	Buffer, 10k Pull-up OPB615, 625, 665	-	-	0.4	V	I _{OL} = 16 mA, V _{CC} = 4.5 V,
	Buffer, Open-Collector OPB616, 626, 666	-	-	0.4		I _F = 0 mA ⁽⁴⁾
t _r , t _f	Inverter, 10k Pull-up OPB618, 627, 667	-	-	0.4	V	I _{OL} = 16 mA, I _F = 5 mA
	Inverter, Open-Collector OPB618, 628	-	-	0.4		
t _r , t _f Output Rise Time, Output Fall Time		-	30	-	ns	f = 10 kHz, I _F = 0 or 5 mA, R _L = 300 Ω, DC = 50%
t _{PLH}	Propagation Delay, Low-High					
	Buffer, 10k Pull-up OPB615, 625, 665	-	0.6	-	µs	
	Buffer, Open-Collector OPB616, 626, 666	-	3.0	-	µs	
	Inverter, 10k Pull-up OPB618, 627, 667	-	3.0	-	µs	
	Inverter, Open-Collector OPB618, 628	-	0.6	-	µs	
t _{PHL}	Propagation Delay, High-Low					
	Buffer, 10k Pull-up OPB615, 625, 665	-	3.0	-	µs	
	Buffer, Open-Collector OPB616, 626, 666	-	0.6	-	µs	
	Inverter, 10k Pull-up OPB618, 627, 667	-	0.6	-	µs	
Data Rate	Inverter, Open-Collector OPB618, 628	-	100	-	kHz	
		-	100	-	kHz	R _L = 300 Ω, DC = 50%

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch





OPB615, OPB616, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series



Typical Performance

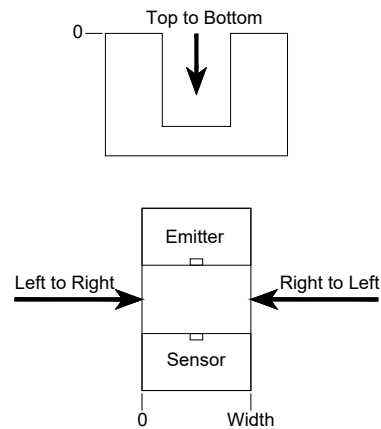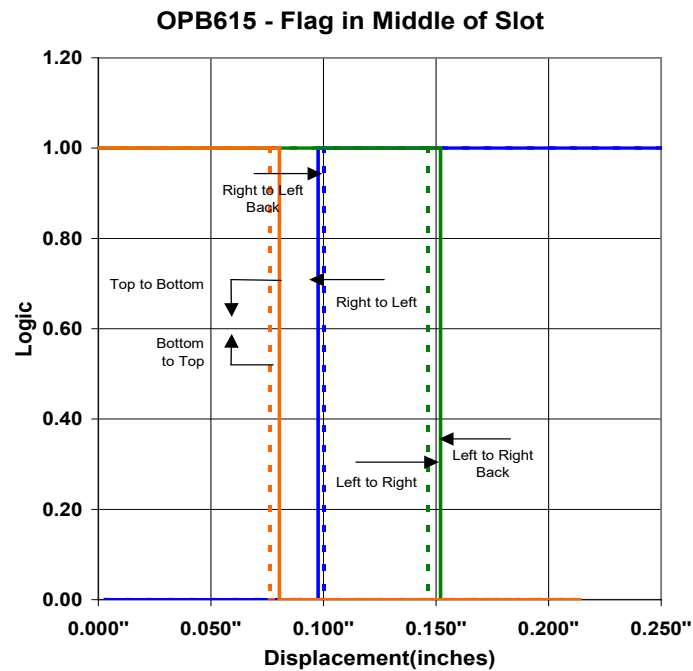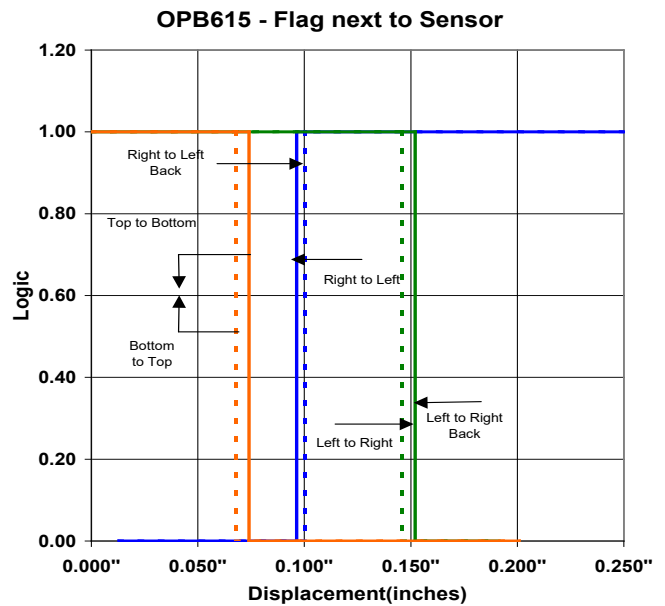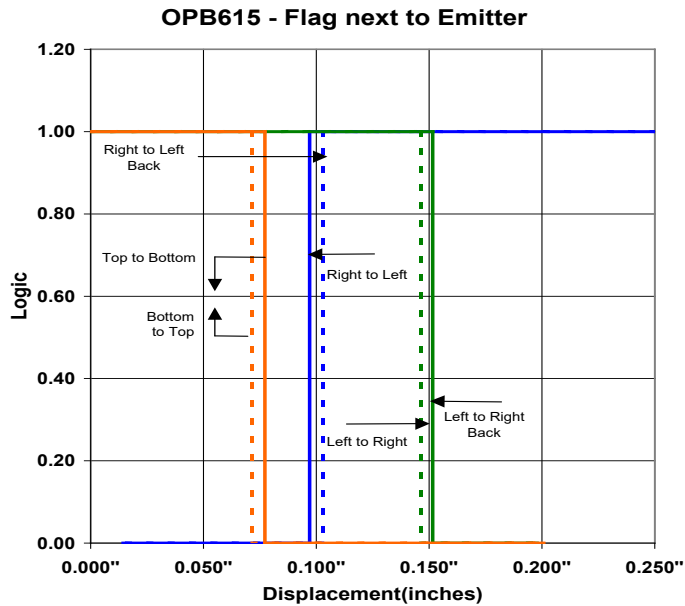

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch


OPB615, OPB616, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series



Typical Performance

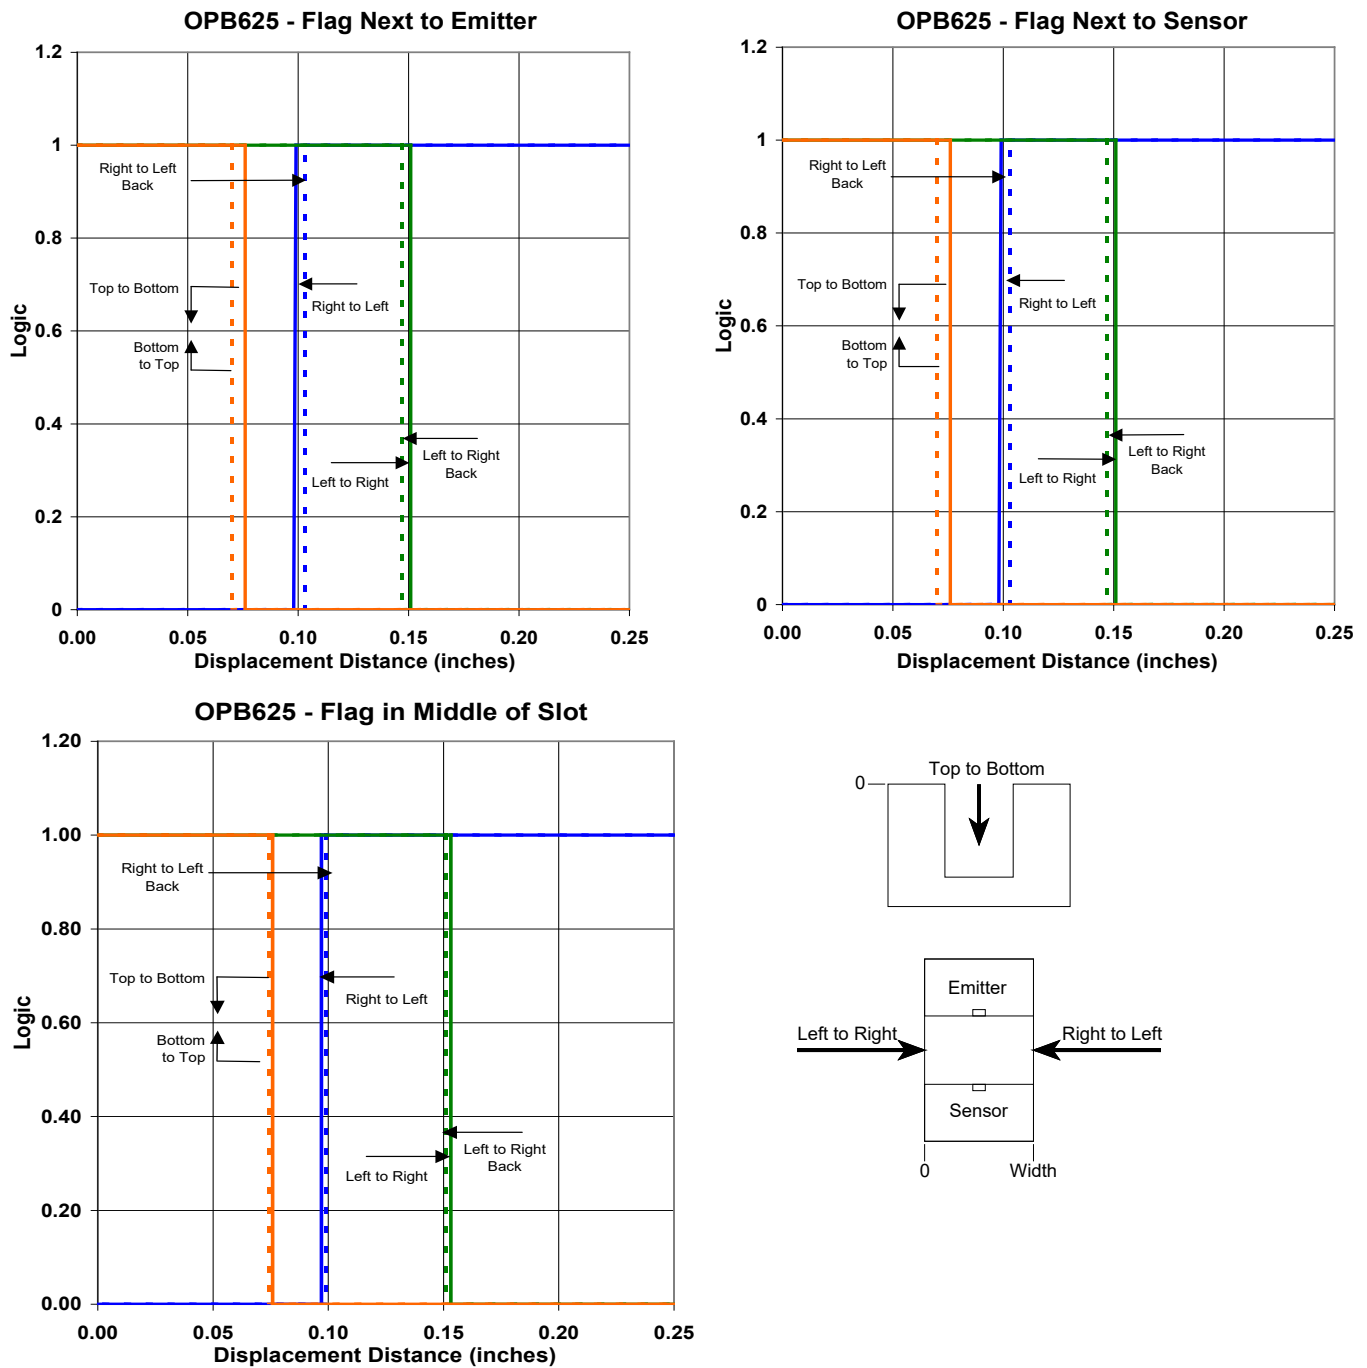

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTeK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch


OPB615, OPB616, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series



Typical Performance

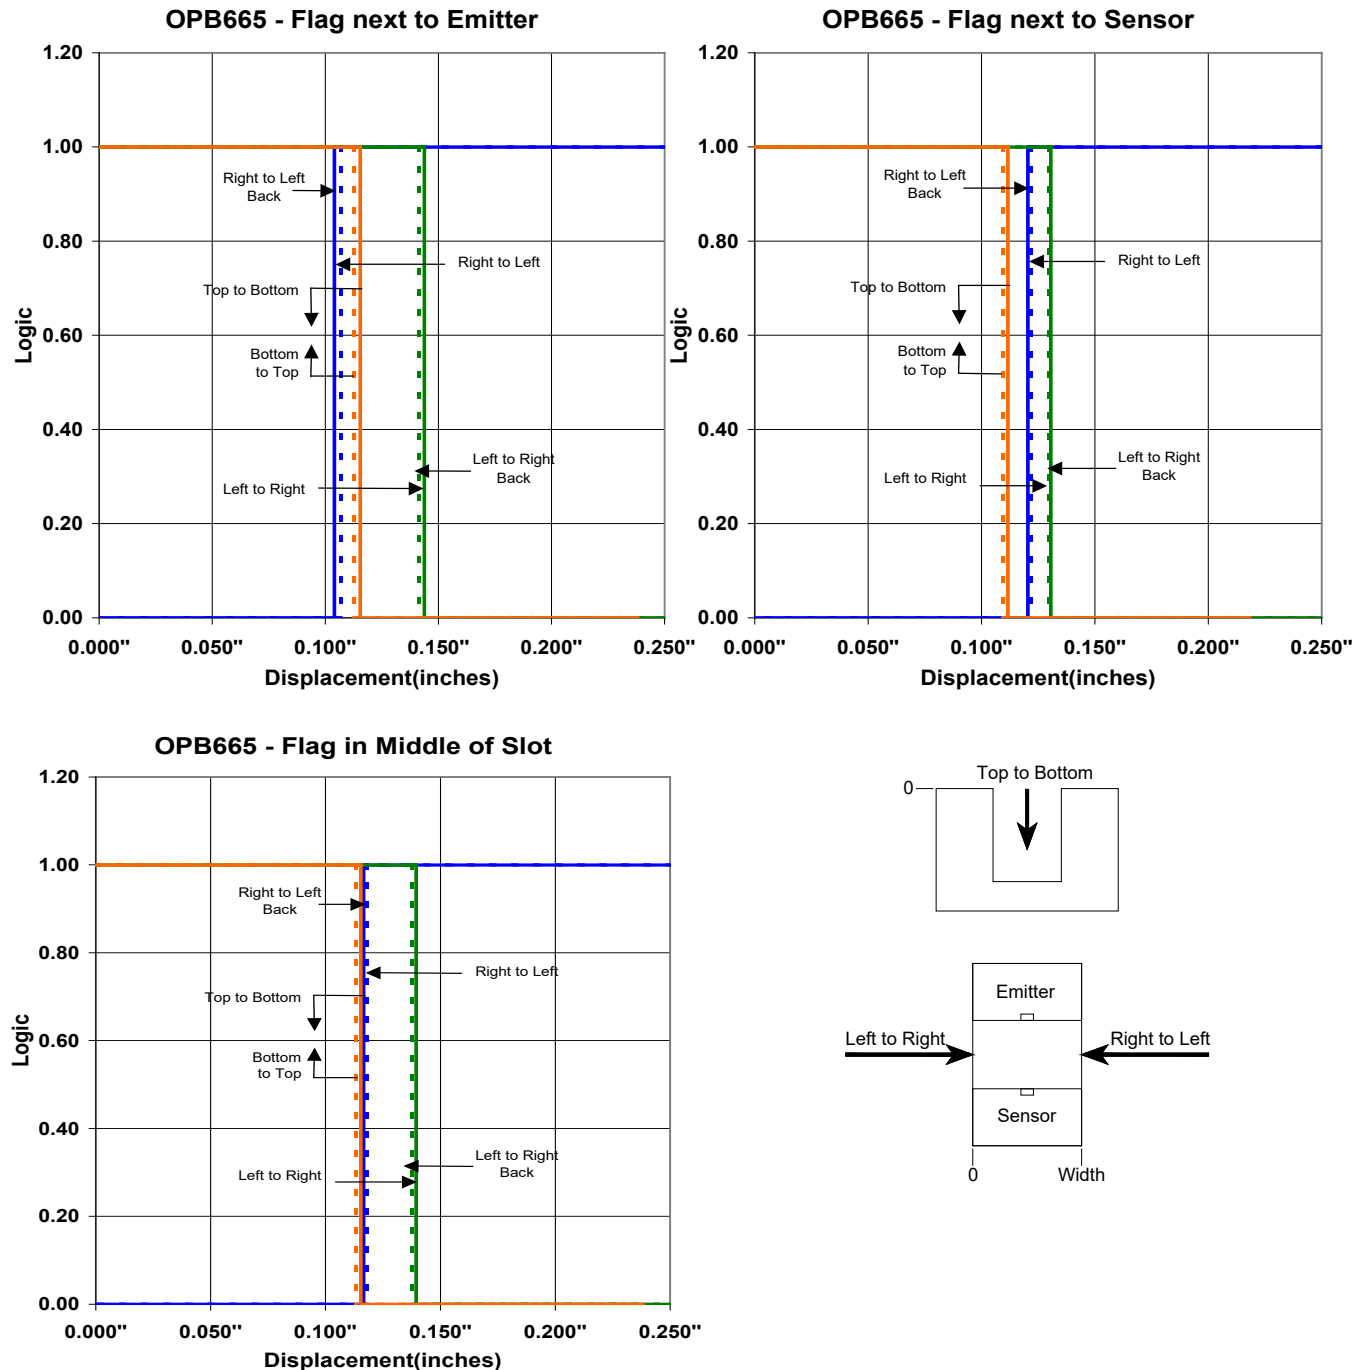

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Photologic® Slotted Optical Switch

OPB615, OPB616, OPB618 Series


OPB625, OPB626, OPB627, OPB628 Series

OPB665N, OPB666N, OPB667N Series




Typical Performance


LED Forward Voltage vs I_F vs Temp

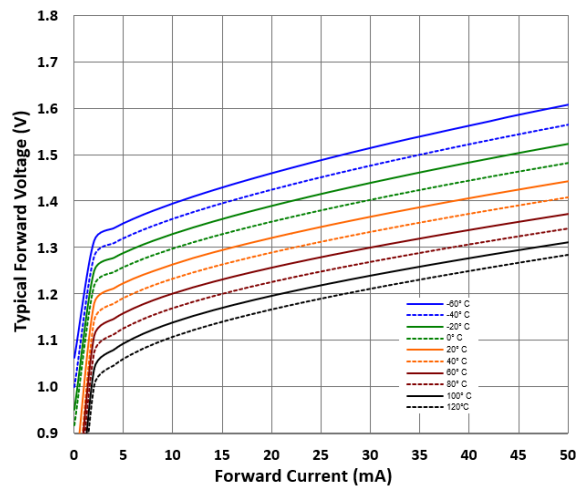

Supply Current vs Temperature

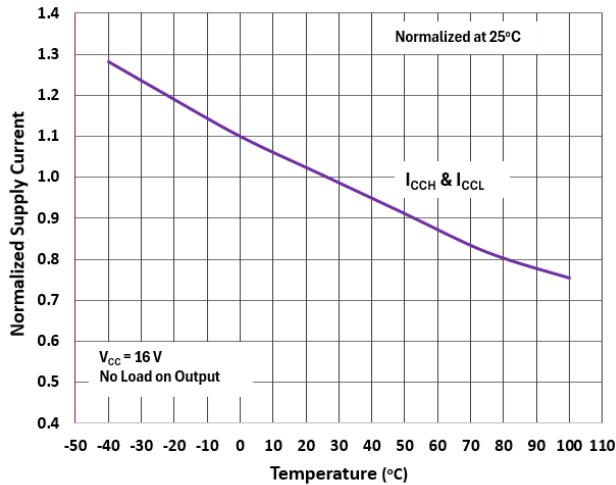

Propagation Delay vs Temperature

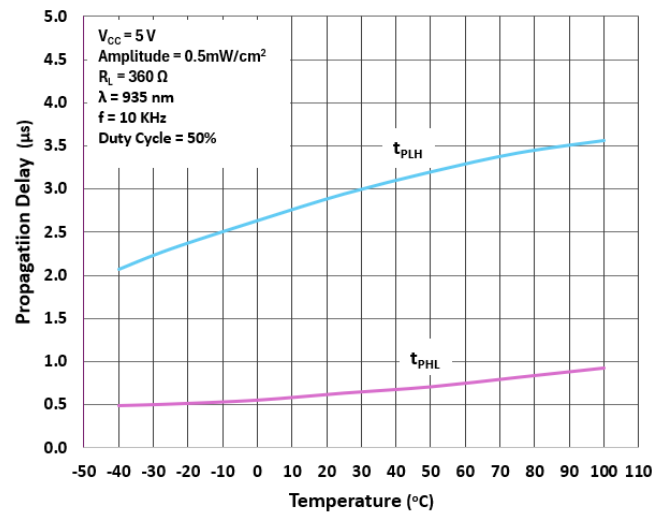

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com