"High Frequency Ceramic Solutions"


GPS, Galileo, BeiDou (BDS), and Glonass (GLNSS), Quad-Band, Low Cost, Linearly Polarized, Omnidirectional Chip Antenna **P/N 1575AT43A0040**

Detail Specification: 9/3/2019

Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services

General Specifications

Part Number	1575AT43A0040		
Frequency (MHz)	1561	1575	1602
Ave. Radiated Efficiency[1]	50%	50%	50%
Peak Gain (dBi typ.)	0.5 (XZ-Total)	0.5 (XZ-Total)	1.0 (XZ-Total)
Average Gain (dBi typ.)	-2.0 (XZ-Total)	-2.0 (XZ-Total)	-2.0 (XZ-Total)
Return Loss (min.)	9.5 dB	9.5 dB	9.5 dB
Input Power	3W max. (CW)		
Reel Quantity	1,000		
Storage Period	18 months max.		

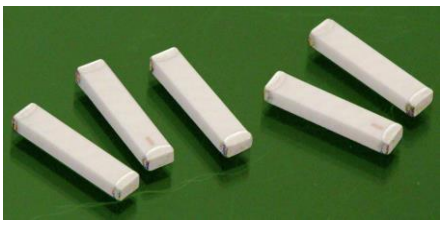

Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Recommended Storage Conditions of unused product on T&R	+5 to +35°C, Humidity 45~75%RH


[1]On test board 1575AT43A0040-EB2SMA

Part Number Explanation

P/N Suffix	**Packing Style**	Bulk (loose)	Suffix = S	e.g.. 1575AT43A0040S
		T & R	Suffix = E	e.g.. 1575AT43A0040E
		100% Tin	Suffix = E or S	e.g.. 1575AT43A0040(E or S)


Mechanical Dimensions

	In	mm
L	0.276 ± 0.008	7.00 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.031 ± +.004/-.008	0.80 ± +0.1/-0.2
a	0.020 ± 0.012	0.50 ± 0.30




Terminal Configuration

No.	Function
1	Feeding Point
2	NC (must still be soldered on pad)



Layout Recommendations

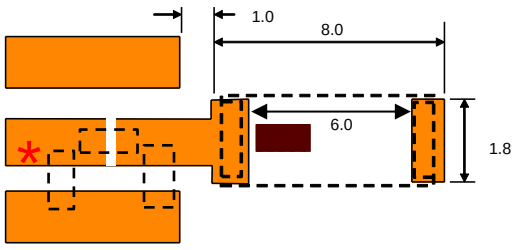

Go to the next page for more layout details/guidelines and

Orderable EVB for evaluation, it comes with a female SMA connector. Go to: http://www.johansontechnology.com/request-a-samplet and ask for p/n 1575AT43A0040-EB1SMA

Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: https://www.johansontechnology.com/ask-a-question

*Line width should be designed to match 50ohm characteristic impedance, depending on your PCB material and thickness (distance to GND). CPWG (co-planar waveguide) trace type strongly suggested.

www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA USA 93012 • TEL 805.389.1166 FAX 805.389.1821

 2019 Johanson Technology, Inc. All Rights Reserved


Downloaded from Arrow.com.

Quad-Band GPS, Galileo (GNSS), BeiDou (BDS), and Glonass (GLNSS), Low Cost, Linearly Polarized, Omnidirectional Chip Antenna **P/N 1575AT43A0040**

Detail Specification: 9/3/2019

Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services

Mounting Considerations, End Mount, GPS/Galileo/BDS/GLNSS 1.559/1.561/1.575/1.602GHz

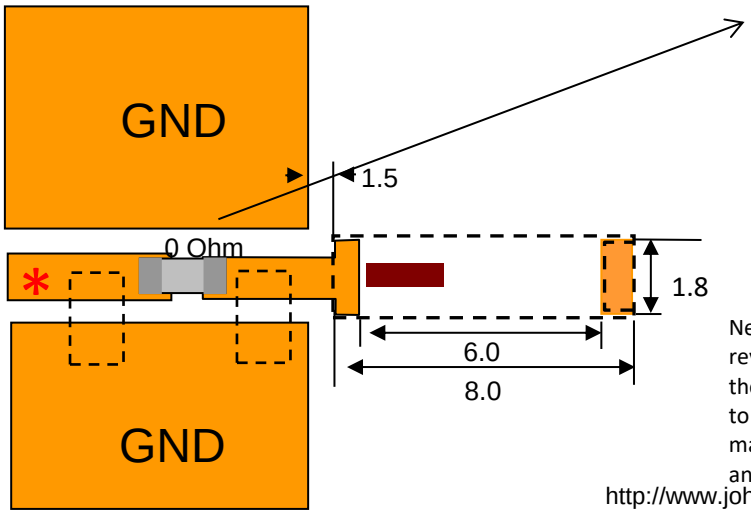


Note: Matching circuits and component values will be different on the client's design, depending on PCB layout, geometry, encasement, etc. It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values you see here are used when antenna is mounted on Johanson's evaluation board.

Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to measure your board, come up with the matching values, and validate on our anechoic chamber (fee may apply) go to: http://www.johansontechnology.com/ask-a-question

*Line width should be designed to match 50ohm characteristic impedance, depending on your PCB material and thickness (distance to GND)

Mounting Considerations, Corner Mount, GPS 1.575GHz Only (smaller total area)

For GPS/Galileo/BDS/GLNSS 1.559/1.561/1.575/1.602GHz corner mount layout, go to page: 5

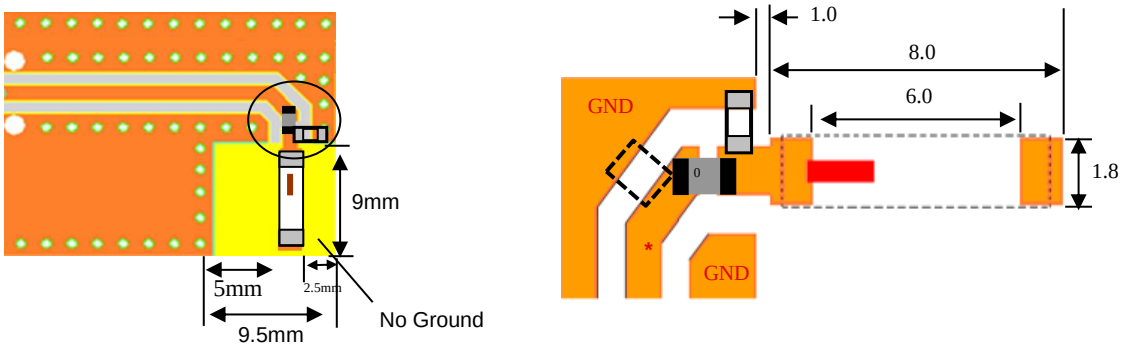

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.


www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA USA 93012 • TEL 805.389.1166 FAX 805.389.1821

 2019 Johanson Technology, Inc. All Rights Reserved

Downloaded from Arrow.com.

Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services


EVB 1, End Mount, GPS/Galileo/BDS/GLNSS 1.559/1.561/1.575/1.602GHz

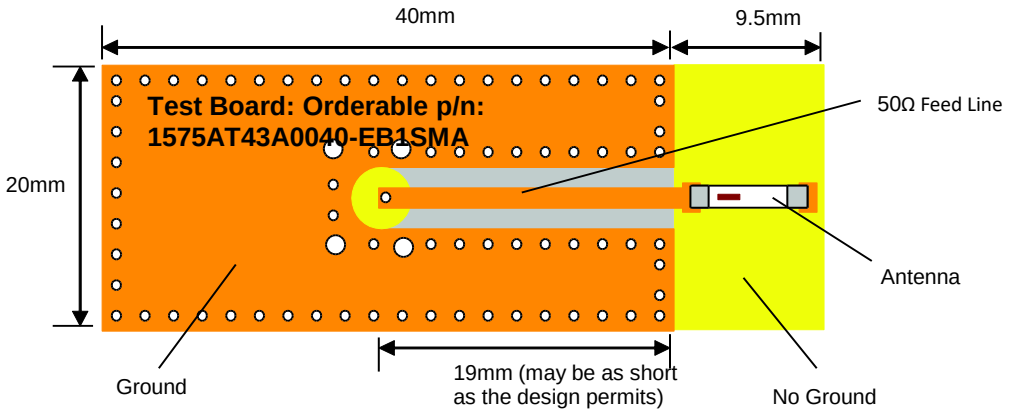


This board has a female SMA connector on the opposite side
Would you like the layout files? Send us a message at:
http://www.johansontechnology.com/ask-a-question/

Order it here:
http://www.johansontechnology.com/request-a-sample

Return Loss and Impedance

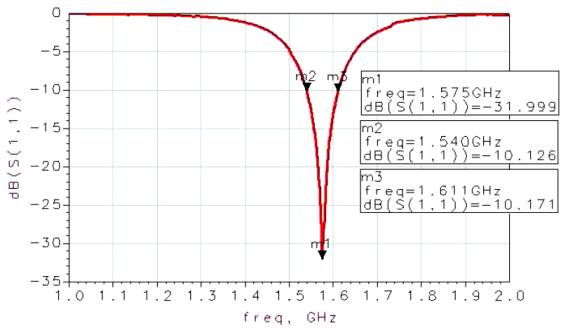

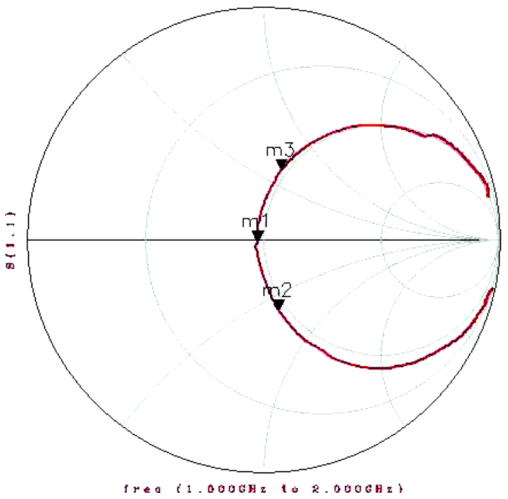

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA USA 93012 • TEL 805.389.1166 FAX 805.389.1821


 2019 Johanson Technology, Inc. All Rights Reserved


Downloaded from Arrow.com.


Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services


Typical Radiation Patterns on EVB 1, End Mount


Typical Radiation Patterns

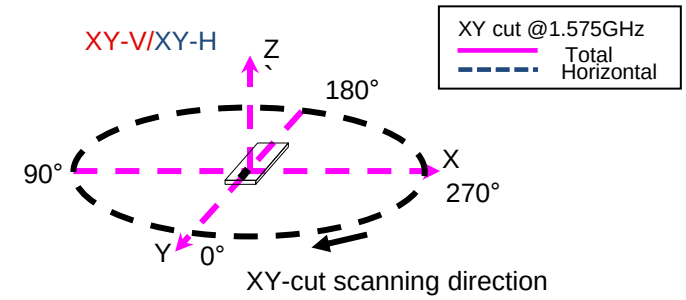


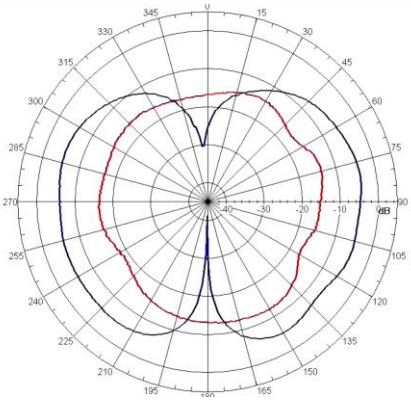


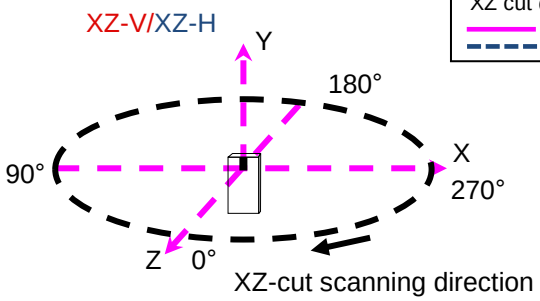




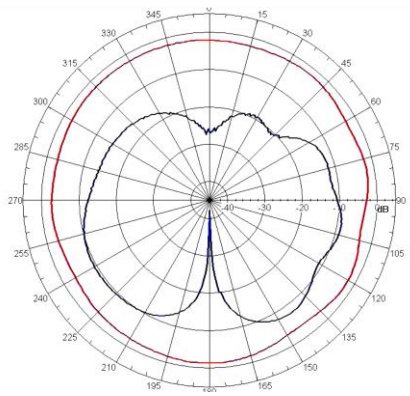

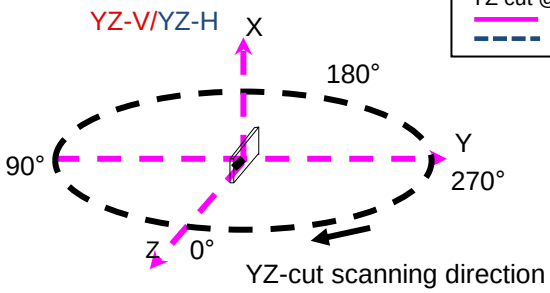



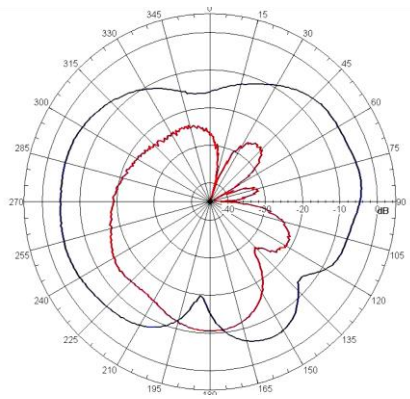

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

2019 Johanson Technology, Inc. All Rights Reserved


Downloaded from Arrow.com.

Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services


Mounting Considerations, Corner Mount, GPS/Galileo/BDS/GLNSS 1.559/1.561/1.575/1.602GHz

Orderable EVB p/n: 1575AT43A0040-EB2SMA

It is required that the designer leave available slots for a "pi" (or shunt-series-shunt) network. We can help you get those final tuning values by contacting us at the link below:
https://www.johansontechnology.com/ipc-antenna-services

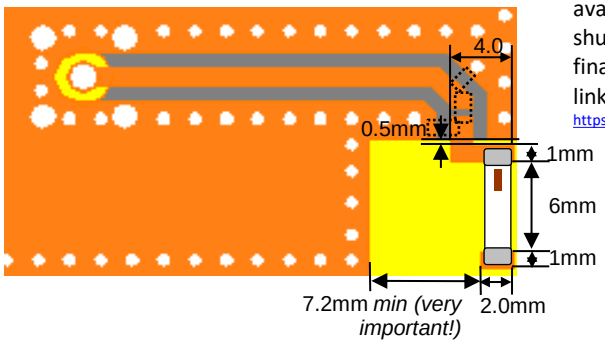

Matching circuit and component values will be different, depending on PCB layout.
Line width should be designed to match 50ohm characteristic impedance, depending on PCB material and thickness. CPWG (co-panar waveguide) type trace strongly recommended.

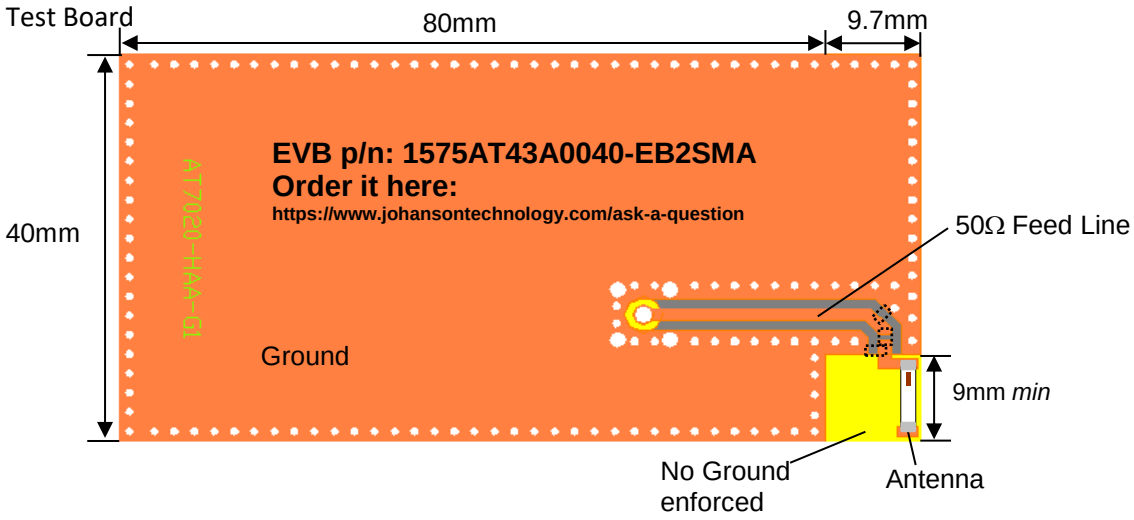

Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to:
https://www.johansontechnology.com/ask-a-question/

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

2019 Johanson Technology, Inc. All Rights Reserved

Downloaded from Arrow.com.


Quad-Band GPS, Galileo (GNSS), BeiDou (BDS), and Glonass (GLNSS), Low Cost, Linearly Polarized, Omnidirectional Chip Antenna **P/N 1575AT43A0040**

Detail Specification: 9/3/2019

Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services

Electrical Characteristics (T=25°C)

❖ Return Loss

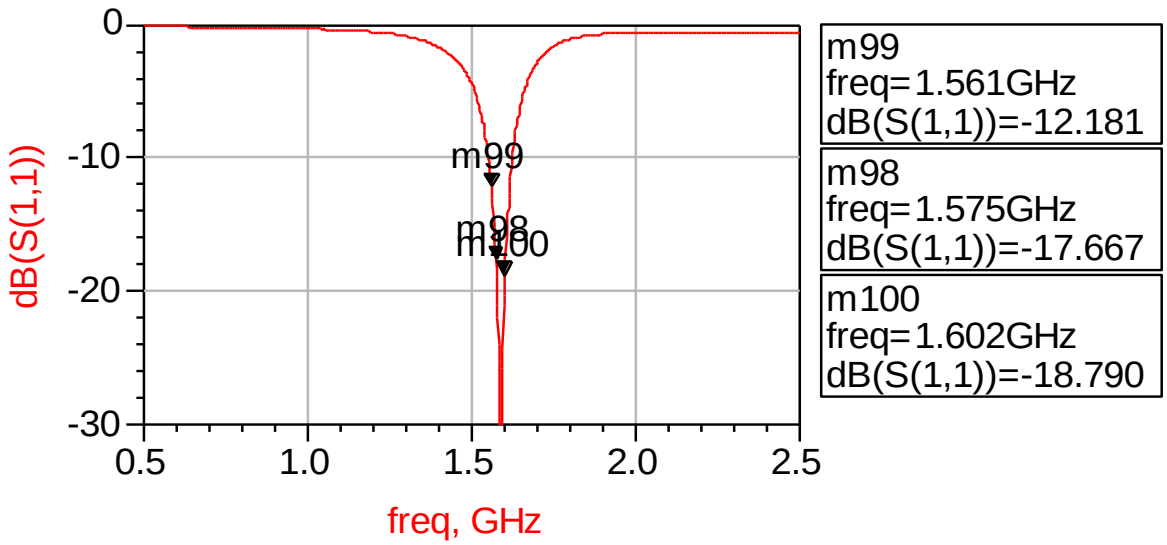

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA USA 93012 • TEL 805.389.1166 FAX 805.389.1821


 2019 Johanson Technology, Inc. All Rights Reserved

Downloaded from Arrow.com.


Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services

Typical Radiation Patterns on EVB 2, Corner Mount


❖Radiation Patterns @ 1.561GHz

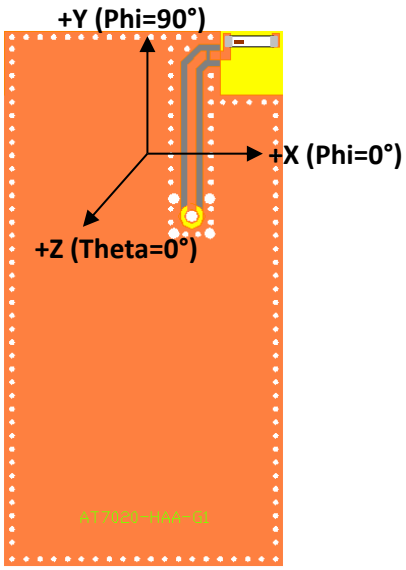


YZ-Plane

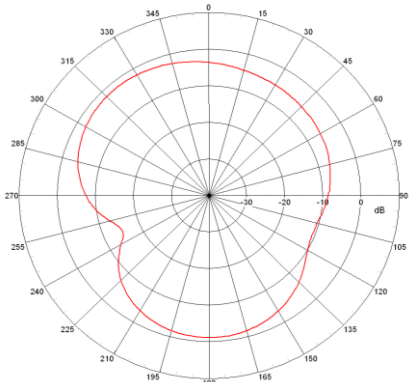

YZ-Plane

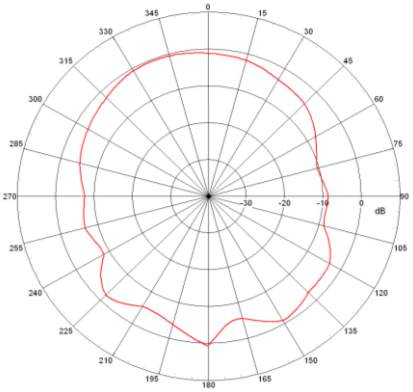

XZ-Plane

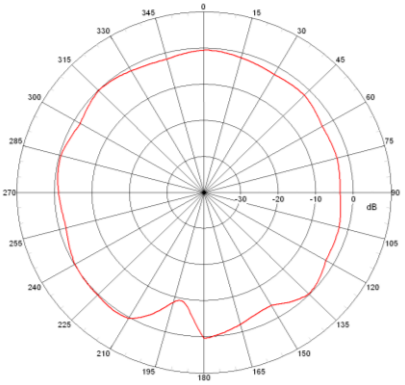


Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

2019 Johanson Technology, Inc. All Rights Reserved


Downloaded from Arrow.com.

Typical Radiation Patterns on EVB 2, Corner Mount


❖Radiation Patterns @ 1.575GHz

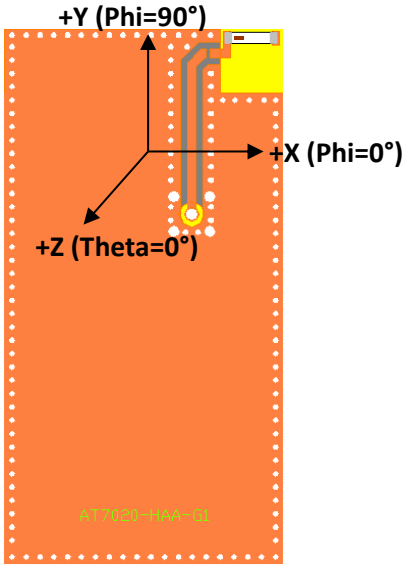


XY-Plane

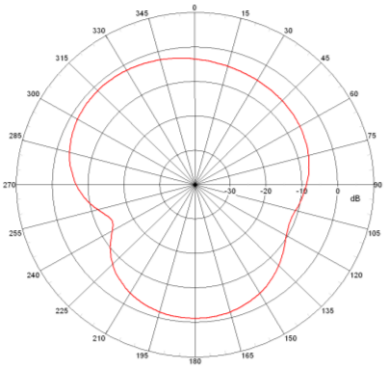

YZ-Plane

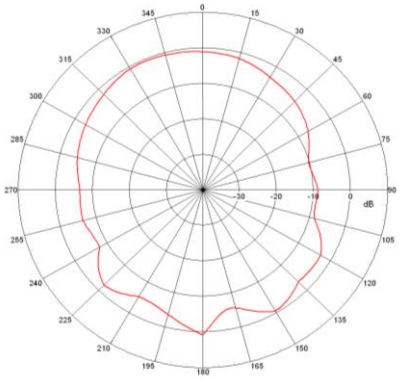

XZ-Plane

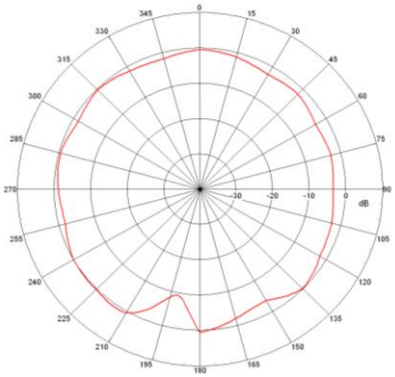

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

2019 Johanson Technology, Inc. All Rights Reserved

Downloaded from Arrow.com.


Quad-Band GPS, Galileo (GNSS), BeiDou (BDS), and Glonass (GLNSS), Low Cost, Linearly Polarized, Omnidirectional Chip Antenna **P/N 1575AT43A0040**

Detail Specification: 9/3/2019


Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services

Typical Radiation Patterns on EVB 2, Corner Mount


❖Radiation Patterns @ 1.602GHz

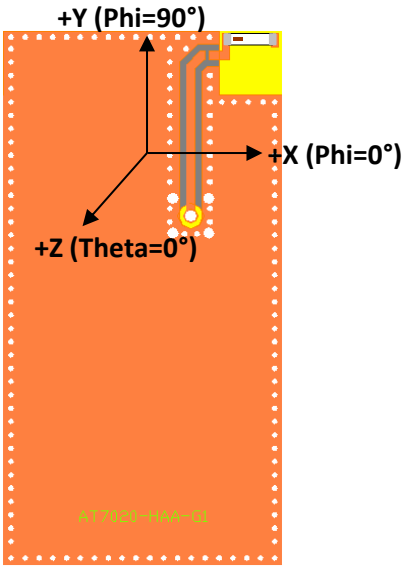


XY-Plane

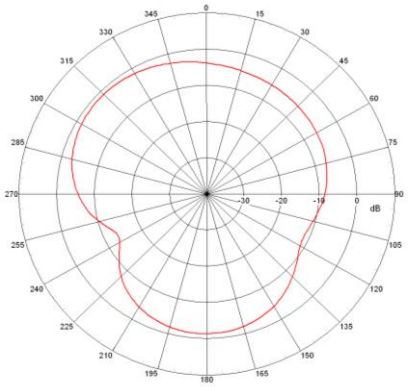

YZ-Plane

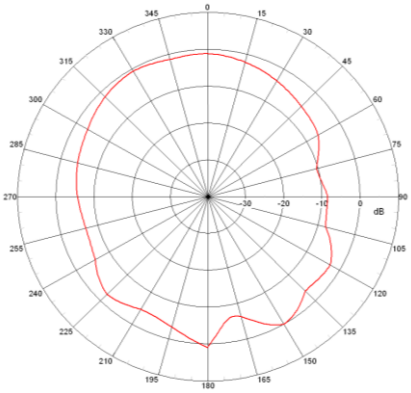

XZ-Plane

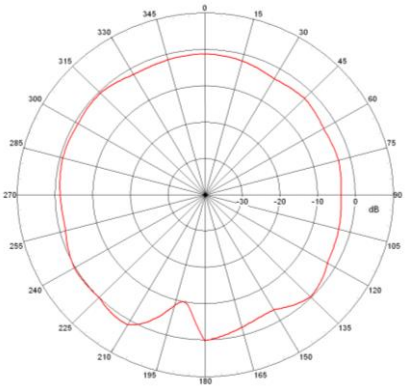

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

2019 Johanson Technology, Inc. All Rights Reserved

Downloaded from Arrow.com.

Let us help tune and validate this antenna to your PCB, go to: https://www.johansontechnology.com/ipc-antenna-services

Antenna tuning, optimization, and validation services:
https://www.johansontechnology.com/ipc-antenna-services

For more antennas and to download measured S-parameters, go to:
https://www.johansontechnology.com/antennas

Soldering Information
https://www.johansontechnology.com/ipcsoldering-profile

MSL Info
https://www.johansontechnology.com/index.php/msl-rating

Packaging information
https://www.johansontechnology.com/tape-reel-packaging

For layout review contact our Applications Team at:
https://www.johansontechnology.com/ask-a-question

RoHS Compliance
https://www.johansontechnology.com/rohs-compliance

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA USA 93012 • TEL 805.389.1166 FAX 805.389.1821

2019 Johanson Technology, Inc. All Rights Reserved

Downloaded from Arrow.com.