

Datamate J-Tek Connectors

Male Crimp Kit


- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Jackscrews are assembled where specified.
- Crimp contacts supplied loose.
- Crimp contacts are rear insertable and replaceable.
- Spare contacts are available.

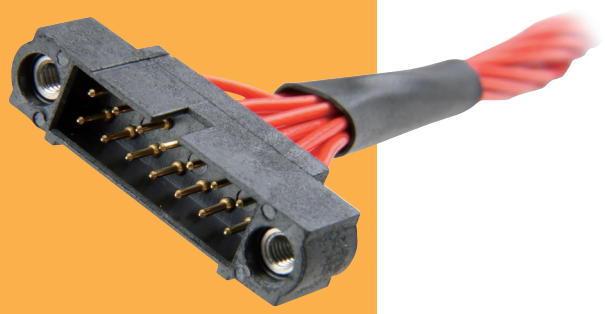

WITHOUT JACKSCREWS

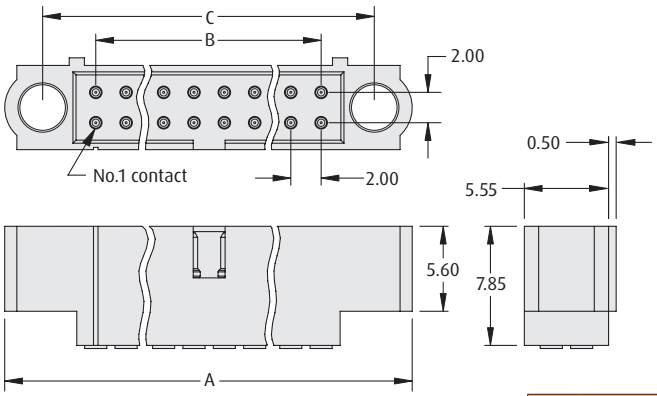

WITH JACKSCREWS

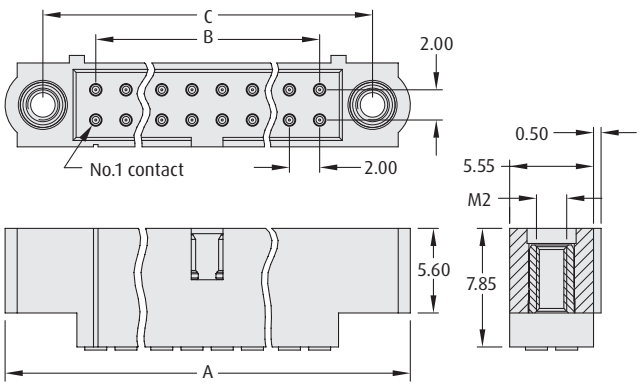

CALCULATION	
A	B + 12
B	Total no. of contacts - 2
C	B + 7

TOOLS


Recommended Crimp Tool – M22520/2-01

Positioner – Z80-193

Contact Insertion/Removal Tool – Z80-280

- Spare contacts shown on following pages.
- Instruction sheets available at **www.harwin.com/instructions.**

WIRE STRIPPING DETAILS



HOW TO ORDER

M80 - 5XX XX 05

SERIES CODE

TYPE	
570	Large Bore (22 AWG), without Jackscrews
571	Small Bore (24-28 AWG), without Jackscrews
560	Large Bore (22 AWG), with Jackscrews
561	Small Bore (24-28 AWG), with Jackscrews

FINISH	
05	Gold

TOTAL NO. OF CONTACTS

04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50

All dimensions in mm.

Downloaded from Arrow.com.