

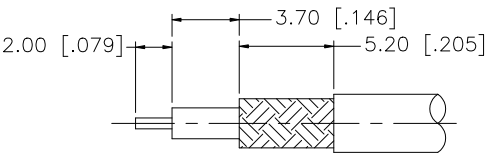



REV.	DATE	DESCRIPTION
A	07/11/00	REVISE CRIMP NOTE
B	07/31/02	REVISE CRIMP NOTE
C	08/09/05	REVISE CABLE DESCRIPTION TO 179/U
D	01/28/08	REMOVE REFERENCE TO SPECIFIC CRIMP TOOL MANUFACTURE IN NOTES



RECOMMENDED CABLE STRIPPING DIMENSIONS

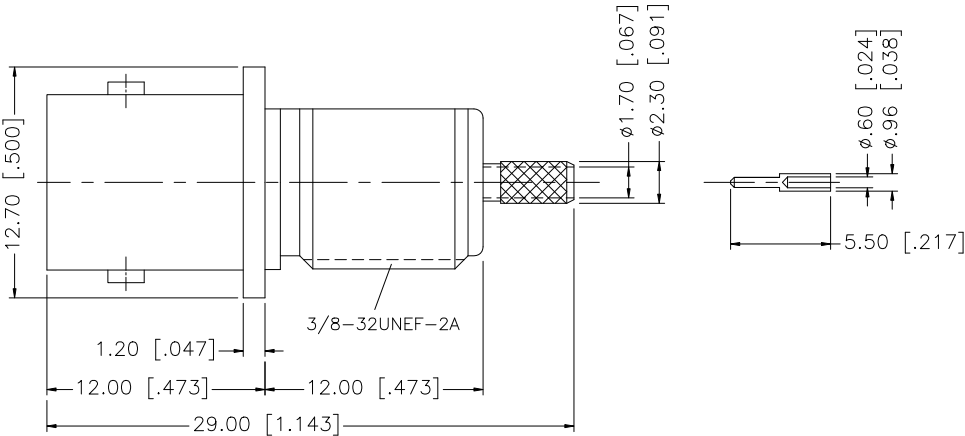

RECOMMENDED MOUNTING HOLE

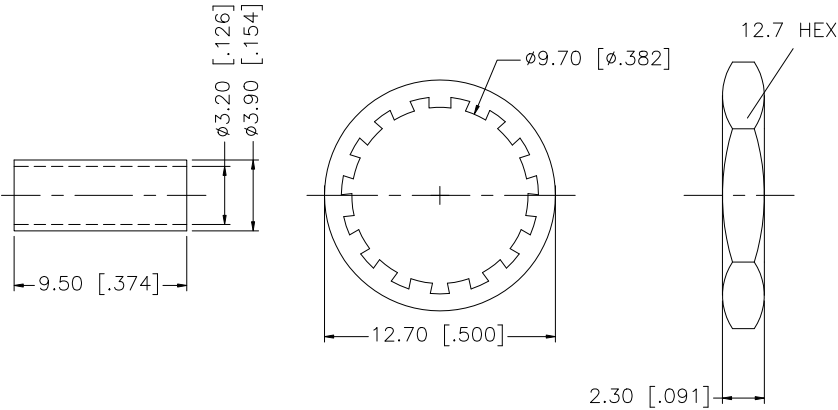

NOTE:
1- USE .128" HEX CRIMP DIE SET
TO TERMINATE OUTER FERRULE

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
7						DRAWN	G.R.S.						01/28/08			
6	HEX NUT	BRASS	NICKEL	1		CHECKED								PART DESCRIPTION		
5	LOCK WASHER	BRASS	NICKEL	1					BNC BULKHEAD CRIMP JACK (front mount) (FOR 179/U 75ohm CABLE)							
4	FERRULE	BRASS	NICKEL	1					ISSUED							
3	CONTACT PIN	BER. COPPER	GOLD	1					SHEET							
2	INSULATOR	TEFLON	NATURAL	1					1 OF 1							
1	BODY	BRASS	NICKEL	1					PART NO.							
DESCRIPTION		MATERIAL	FINISH	QTY					112654							
									DWG. NO.		112654.DWG	REV.	D	SIZE	A	SCALE