


## Data Sheet | Item Number: 787-821

Switched-mode power supply; Pro; 1-phase; 12 VDC output voltage; 10 A output current;  
TopBoost + PowerBoost; DC OK contact

<https://www.wago.com/787-821>

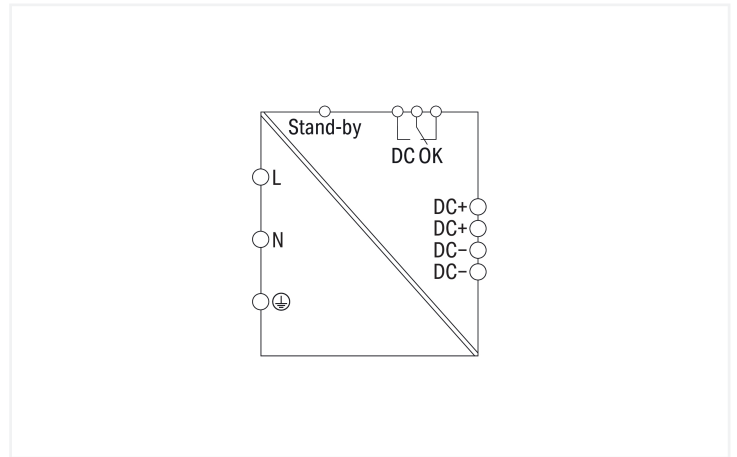

### Features:

- Switched-mode power supply with PowerBoost and TopBoost
- Switch off the output and minimize power consumption via stand-by input
- Output monitoring via DC OK contact
- Suitable for both parallel and series operation
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204

### Technical data

Input	
Phases	1
Nominal input voltage $U_{i, \text{nom}}$	1 x 100 ... 240 VAC
Input voltage range	1 x 85 ... 264 VAC; 120 ... 300 VDC
Input voltage derating	-5 %/V (< 95 VAC)
Nominal mains frequency range	50 ... 60 Hz; 0 Hz
Input current $I_i$	$\leq 0.97$ A (240 VAC; 10 ADC)
Discharge current	$\leq 1$ mA
Inrush current	$\leq 30$ A (peak)
Power factor correction (PFC)	Passive
Mains failure hold-up time	$\geq 35$ ms (230 VAC)

Output	
Nominal output voltage $U_{o, \text{nom}}$	12 VDC (SELV)
Output voltage range	11 ... 18 VDC (adjustable)
Default Setting	12 VDC
Nominal output current $I_{o, \text{nom}}$	10 A (12 VDC)
Nominal output power	120 W
Deviation	$\leq 1$ %
Residual ripple	$\leq 70$ mV (peak-to-peak)
Current limitation	$1.1 \times I_{o, \text{nom}}$ (typ.)
Overload behavior	TopBoost/PowerBoost/Constant current mode
PowerBoost	20 ADC (4 s); 15 ADC (8 s)
TopBoost	60 ADC (25 ms); 40 ADC (25 ms; $U_i$ )

### Signaling and Communication

Signaling	1 x DC OK LED (green) 1 x Error LED (red) 1 x Stand-by input 1 x DC OK relay contact (changeover contact)
Operation status indicator	Green LED (DC OK) Red LED (error)

### Efficiency/Power Losses

Power loss $P_i$	$\leq 0.5$ W (standby); $\leq 5$ W (no load); $\leq 14.6$ W (nominal load)
Efficiency (typ.)	87.8 %

### Circuit Protection

Internal fuse	T 4 A / 250 VAC
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	Circuit breaker: 6 A, 10 A, 16 A; Tripping characteristic: B or C

### Safety and protection

Isolation voltage (pri.-sec.)	4.242 kVDC
Isolation voltage (pri.-PE)	2.2 kVDC
Isolation voltage (sec.-PE)	0.7 kVDC
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ 25 VDC
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

### Connection Data

#### Connection 1

Connection type	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 231 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

#### Connection 2

Connection type	Signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 733 Series
Solid conductor	0.08 ... 0.5 mm <sup>2</sup> / 28 ... 20 AWG
Fine-stranded conductor	0.08 ... 0.5 mm <sup>2</sup> / 28 ... 20 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

### Physical data

Width	57 mm / 2.244 inches
Height	163 mm / 6.417 inches
Depth from upper-edge of DIN-rail	163 mm / 6.417 inches
Note (dimensions)	Height with connector

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Weight	1295 g
--------	--------

### Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-3 %/K (> 50 °C)
Climatic category	3K3 (per EN 60721)

### Standards and Specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 EN 61558-2-16 UL 60950 UL 508

### Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821226482
Customs tariff number	85044083900

### Product Classification

UNSPSC	39121004
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc.	UL 508	E255817

#### General approvals

UR Underwriters Laboratories Inc.	UL 60950-1	E255815
---	------------	---------

**Declarations of conformity and manufacturer's declarations**

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

Compliance Search
Environmental Product Compliance 787-821 <a href="#">↓</a>

**Documentation**

Bid Text			
787-821	04.07.2019	docx 20.39 KB	<a href="#">↓</a>
787-821	04.07.2019	xml 7.53 KB	<a href="#">↓</a>

Instruction Leaflet		
Primär getaktete Stromversorgungen PRO	pdf 247.20 KB	<a href="#">↓</a>

**CAD/CAE-Data**

CAD data
2D/3D Models 787-821 <a href="#">↓</a>

CAE data
EPLAN Data Portal 787-821 <a href="#">↓</a>
WSCAD Universe 787-821 <a href="#">↓</a>
ZUKEN Portal 787-821 <a href="#">↓</a>

**Engineering-Software**

Configuration and Commissioning Software			
WAGO Line Length Calculation	1.3.5 09.12.2019	exe 329.50 KB	<a href="#">↓</a>

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Marking

##### 1.1.1.1 Marking strip



**Item No.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white



**Item No.: 210-831**

Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white



**Item No.: 210-832**

Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

#### 1.1.2 Mounting adapter

##### 1.1.2.1 DIN-rail adapter



**Item No.: 787-897**

Carrier rail adapter made of zinc die-cast; for mounting 787-8xx devices to a DIN 35 rail; gray



**Item No.: 787-896**

Carrier rail adapter; for mounting 787-8xx devices to a DIN 35 rail; gray

##### 1.1.2.2 Wall-mount adapter



**Item No.: 787-895**

Mounting carrier; for screw fixing of 787-8xx devices on mounting plate or wall without DIN 35 rail; gray

#### 1.1.3 Tool

##### 1.1.3.1 Operating tool



**Item No.: 210-719**

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft



**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



**Item No.: 210-769**

SCREWDRIVER; green