ON Semiconductor

Is Now



To learn more about onsemi™, please visit our website at
www.onsemi.com

onsemi and onsemi and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

Downloaded from Arrow.com.

ON Semiconductor®

FGB3040CS

EcoSPARKÈ 300mJ, 400V, N-Channel Current Sensing Ignition IGBT

General Description

The FGB3040CS is an Ignition IGBT that offers outstanding SCIS capability along with a ratiometric emitter current sensing capability. This sensing is based on a emitter active area ratio of 200:1. The output is provided through a fourth (sense) lead. This signal provides a current level that is proportional to the main collector to emitter current. The effective ratio as measured on the sense lead is a function of the sense output, the collector current and the gate to emitter drive voltage.


Applications

- Smart Automotive Ignition Coil Driver Circuits
- ECU Based Systems
- Distributorless Based Systems
- Coil on Plug Based Systems


Features

- SCIS Energy = 300mJ at T_J = 25°C
- Logic Level Gate Drive
- Qualified to AEC Q101
- RoHS Compliant

Package

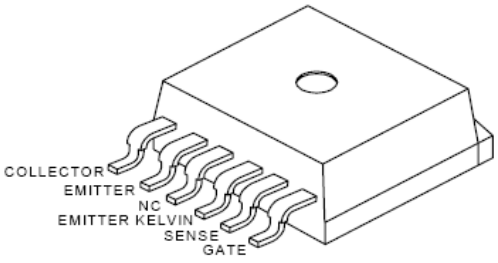

Symbol

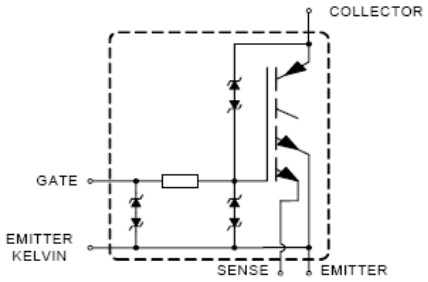

Device Maximum Ratings T_A = 25°C unless otherwise noted

Symbol	Parameter	Ratings	Units
BV_{CER}	Collector to Emitter Breakdown Voltage (I_C = 2mA)	430	V
BV_{ECS}	Emitter to Collector Breakdown Voltage (I_C = 1mA) (Reverse Battery Condition)	24	V
E_{SCIS25}	Self Clamping Inductive Switching Energy (at starting T_J = 25°C)	300	mJ
$E_{SCIS150}$	Self Clamping Inductive Switching Energy (at starting T_J = 150°C)	170	mJ
I_{C25}	Continuous Collector Current, at V_{GE} = 4.0V, T_C = 25°C	21	A
I_{C110}	Continuous Collector Current, at V_{GE} = 4.0V, T_C = 110°C	19	A
V_{GEM}	Maximum Continuous Gate to Emitter Voltage	±10	V
P_D	Power Dissipation, at T_C = 25°C	150	W
	Power Dissipation Derating, for T_C > 25°C	1	W/°C
T_J	Operating Junction Temperature Range	-40 to 175	°C
T_{STG}	Storage Junction Temperature Range	-40 to 175	°C
T_L	Max. Lead Temp. for Soldering (at 1.6mm from case for 10sec)	300	°C
T_{PKG}	Max. Package Temp. for Soldering (Package Body for 10 sec)	260	°C
ESD	Electrostatic Discharge Voltage, HBM model (100pfd, 1500 ohms)	4	kV

@2012 Semiconductor Components Industries, LLC.
October-2017,Rev.3

Publication Order Number:
FGB3040CS/D

Downloaded from Arrow.com.

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
3040CS	FGB3040CS	TO-263 6 Lead	300mm	24mm	800
3040CS	FGB3040CS	TO-263 6 Lead	Tube	N/A	50

Electrical Characteristics T_A = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions		Min	Typ	Max	Units
Off State Characteristics							
BV_{CER}	Collector to Emitter Breakdown Voltage	I_{CE} = 2mA, V_{GE} = 0, R_{GE} = 1KΩ, See Fig. 17 T_J = -40 to 150°C		370	410	430	V
BV_{CES}	Collector to Emitter Breakdown Voltage	I_{CE} = 10mA, V_{GE} = 0V R_{GE} = 0, See Fig. 17 T_J = -40 to 150°C		390	430	450	V
BV_{ECS}	Emitter to Collector Breakdown Voltage	I_{CE} = -75mA, V_{GE} = 0V, T_C = 25°C		30	-	-	V
BV_{GES}	Gate to Emitter Breakdown Voltage	I_{GES} = ±2mA		±12	±14	-	V
I_{GEO}	Gate to Emitter Leakage Current	V_{GE} = ±10V		-	-	±9	µA
I_{CES}	Collector to Emitter Leakage Current	V_{CES} = 250V, See Fig. 13	T_C = 25°C	-	-	25	µA
			T_C = 150°C	-	-	1	mA
I_{ECS}	Emitter to Collector Leakage Current	V_{EC} = 24V, See Fig. 13	T_C = 25°C	-	-	1	mA
			T_C = 150°C	-	-	40	
R_1	Series Gate Resistance			-	100	-	Ω
On State Characteristics							
$V_{CE(SAT)}$	Collector to Emitter Saturation Voltage	I_{CE} = 6A, V_{GE} = 4V	T_C = 25°C See Fig. 5	-	1.3	1.6	V
$V_{CE(SAT)}$	Collector to Emitter Saturation Voltage	I_{CE} = 10A, V_{GE} = 4.5V	T_C = 150°C See Fig. 6	-	1.6	1.85	V
$V_{CE(SAT)}$	Collector to Emitter Saturation Voltage	I_{CE} = 15A, V_{GE} = 4.5V	T_C = 150°C	-	1.8	2.35	V
$I_{CE(ON)}$	Collector to Emitter On State Current	V_{CE} = 5V, V_{GE} = 5V		-	37	-	A
Dynamic Characteristics							
$Q_{G(ON)}$	Gate Charge	I_{CE} = 10A, V_{CE} = 12V, V_{GE} = 5V, See Fig. 16		-	15	-	nC
$V_{GE(TH)}$	Gate to Emitter Threshold Voltage	I_{CE} = 1mA, V_{CE} = V_{GE} See Fig. 12	T_C = 25°C	1.3	1.6	2.2	V
			T_C = 150°C	0.75	1.1	1.8	
V_{GEP}	Gate to Emitter Plateau Voltage	I_{CE} = 10A, V_{CE} = 12V		-	3.0	-	V
β_{AREA}	Emitter Sense Area Ratio	Sense Area/Total Area		-	1/200	-	-
$\beta_{5\Omega}$	Emitter Current Sense Ratio	I_{CE} = 8.0A, V_{GE} = 5V, R_{SENSE} = 5 Ω		-	230	-	-
$\beta_{20\Omega}$	Emitter Current Sense Ratio	I_{CE} = 9.0A, V_{GE} = 5V, R_{SENSE} = 20 Ω		550	640	765	-

Switching Characteristics

$t_{d(ON)R}$	Current Turn-On Delay Time-Resistive	V_{CE} = 14V, R_L = 1Ω	-	0.6	4	µs
t_{rR}	Current Rise Time-Resistive	V_{GE} = 5V, R_G = 1KΩ T_J = 25°C, See Fig. 14	-	1.5	7	µs
$t_{d(OFF)L}$	Current Turn-Off Delay Time-Inductive	V_{CE} = 300V, L = 500µHy,	-	4.7	15	µs
t_{fL}	Current Fall Time-Inductive	V_{GE} = 5V, R_G = 1KΩ T_J = 25°C, See Fig. 14	-	2.6	15	µs
SCIS	Self Clamped inductive Switching	T_J = 25°C, L = 3.0mHy, I_{CE} = 14.2A, R_G = 1k Ω, V_{GE} = 5V, See Fig. 3&4	-	-	300	mJ

Thermal Characteristics

$R_{\theta JC}$	Thermal Resistance Junction to Case	All Packages	-	-	1.0	°C/W

Downloaded from Arrow.com.

Typical Performance Curves

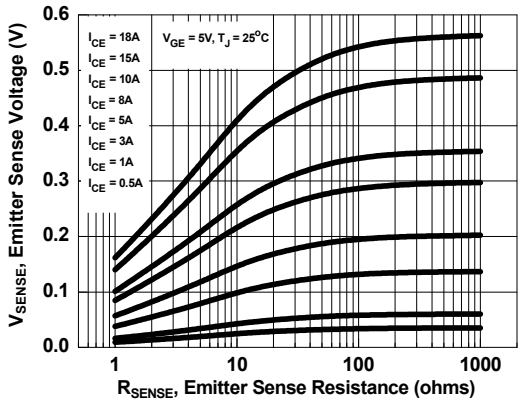


Figure 1. Emitter Sense Voltage vs. Emitter Sense Resistance

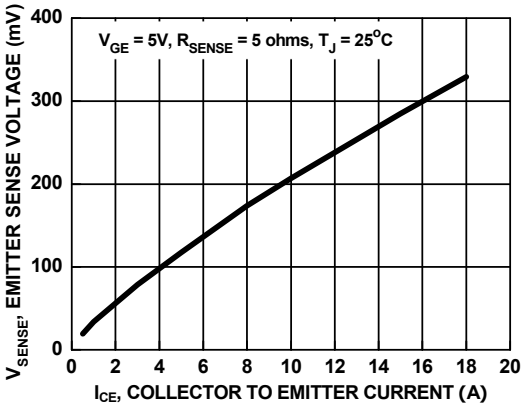


Figure 2. Emitter Sense Voltage vs. Collector to Emitter Current

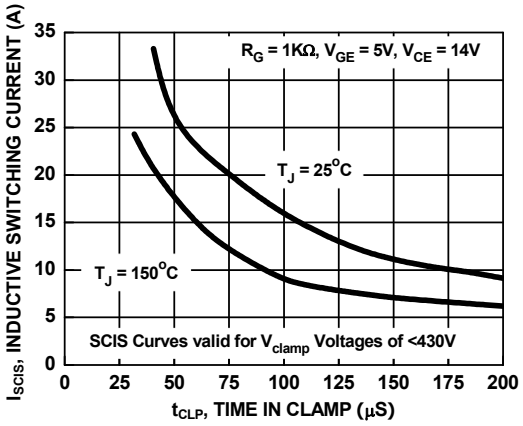


Figure 3. Self Clamped Inductive Switching Current vs. Time in Clamp

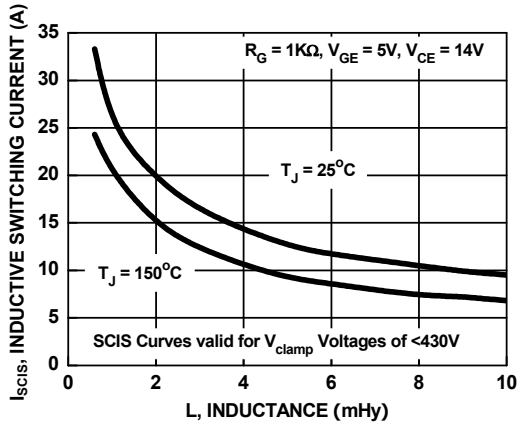


Figure 4. Self Clamped Inductive Switching Current vs. Inductance

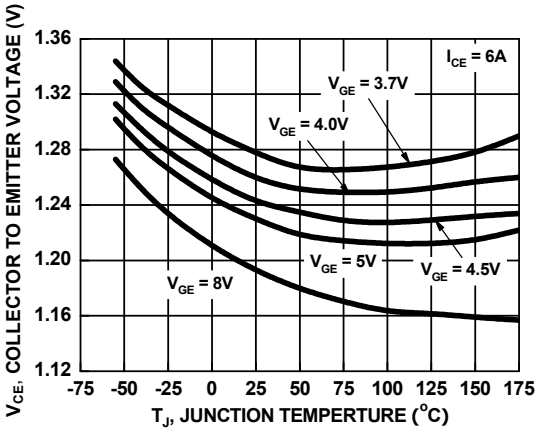


Figure 5. Collector to Emitter On-State Voltage vs. Junction Temperature

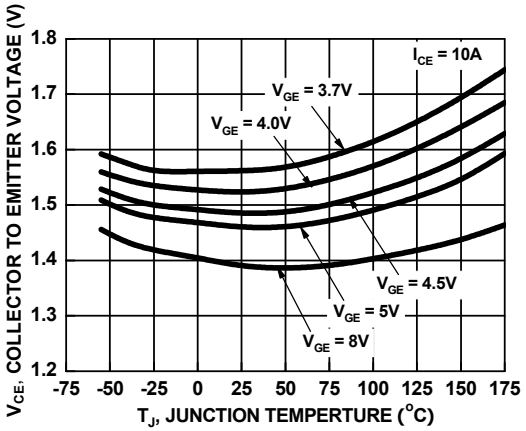


Figure 6. Collector to Emitter On-State Voltage vs. Junction Temperature

Downloaded from Arrow.com.

Typical Performance Curves (Continued)

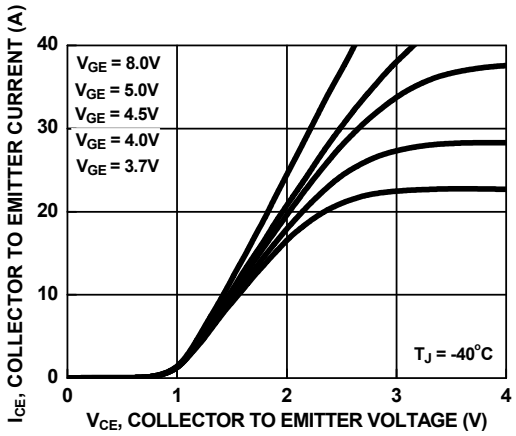


Figure 7. Collector to Emitter On-State Voltage vs. Collector Current

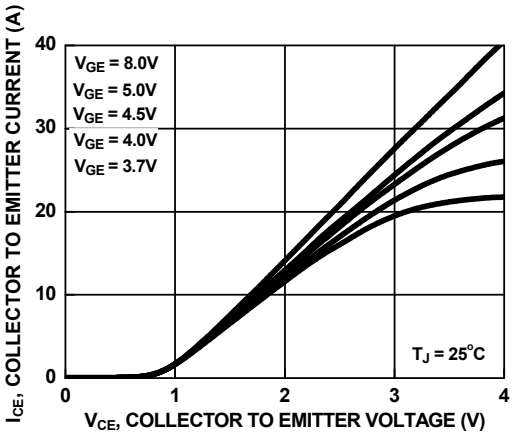


Figure 8. Collector to Emitter On-State Voltage vs. Collector Current

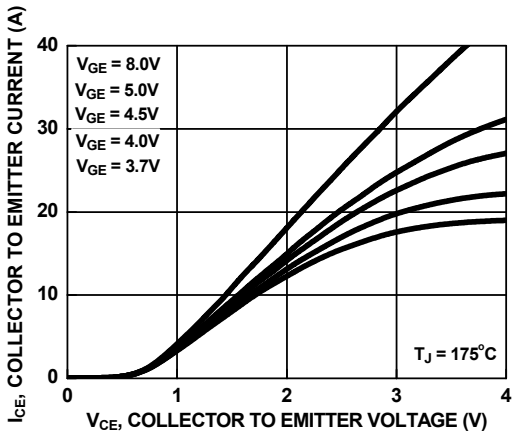


Figure 9. Collector to Emitter On-State Voltage vs. Collector Current

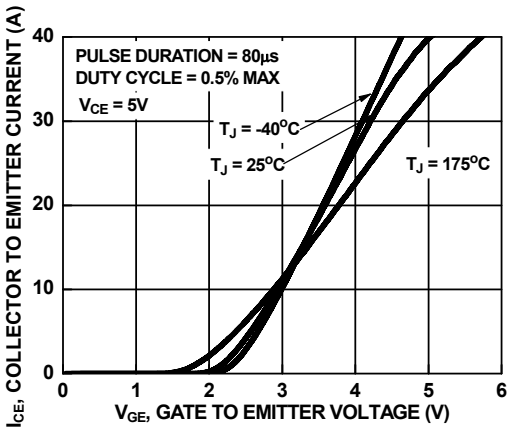


Figure 10. Transfer Characteristics

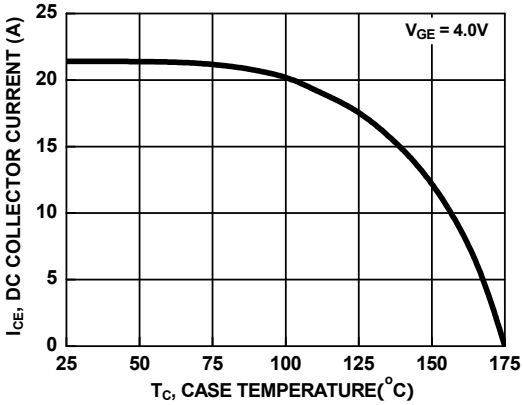


Figure 11. DC Collector Current vs. Case Temperature

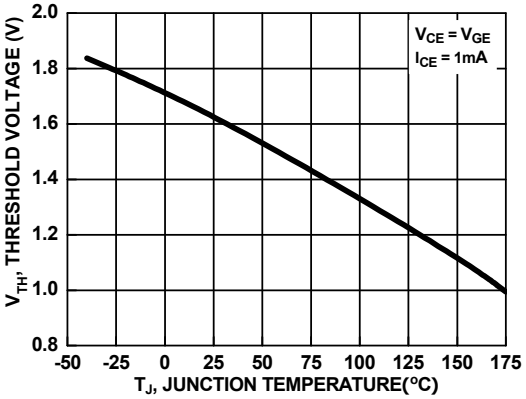


Figure 12. Threshold Voltage vs. Junction Temperature

Downloaded from Arrow.com.

Typical Performance Curves (Continued)

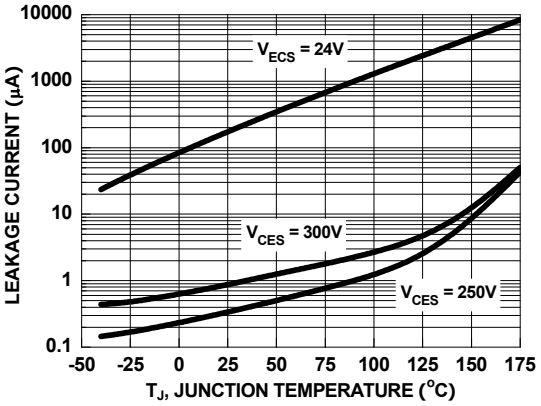


Figure 13. Leakage Current vs. Junction Temperature

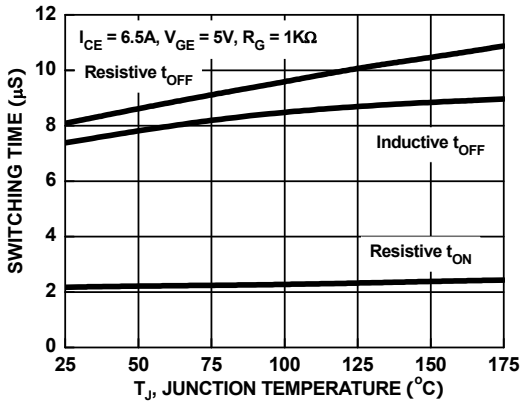


Figure 14. Switching Time vs. Junction Temperature

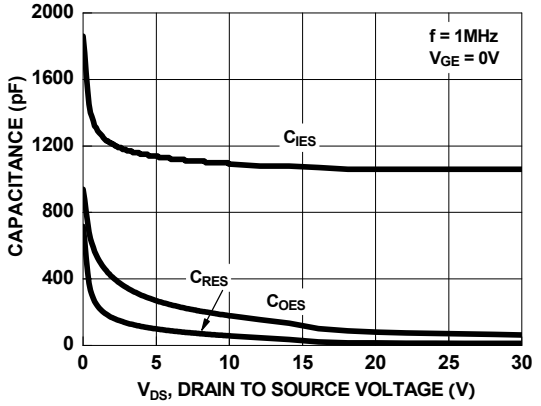


Figure 15. Capacitance vs. Collector to Emitter Voltage

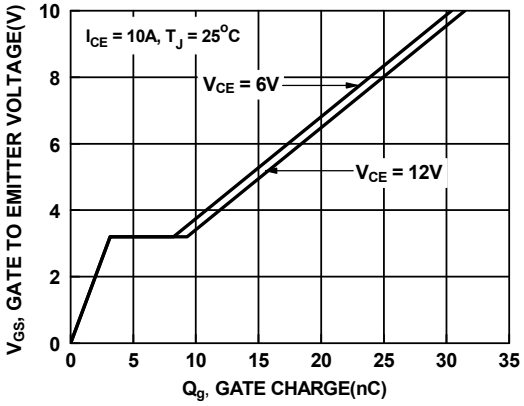


Figure 16. Gate Charge

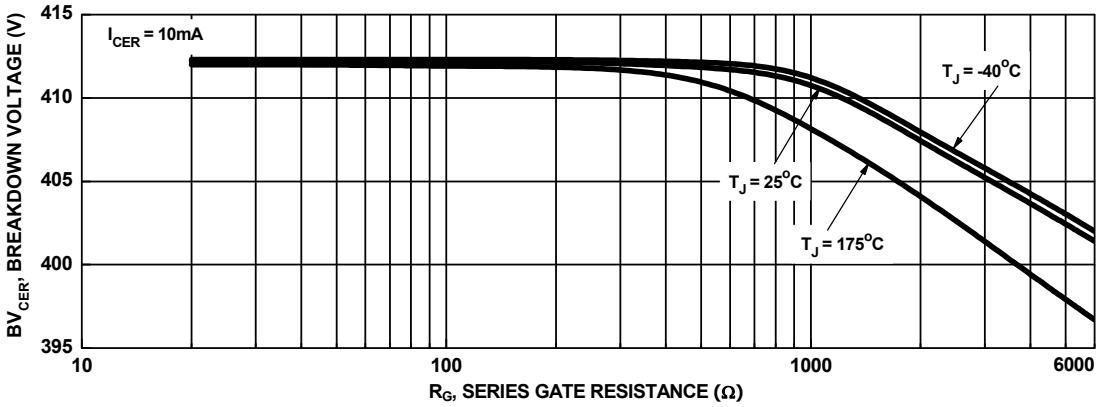


Figure 17. Break Down Voltage vs. Series Gate Resistance

Downloaded from Arrow.com.

Typical Performance Curves

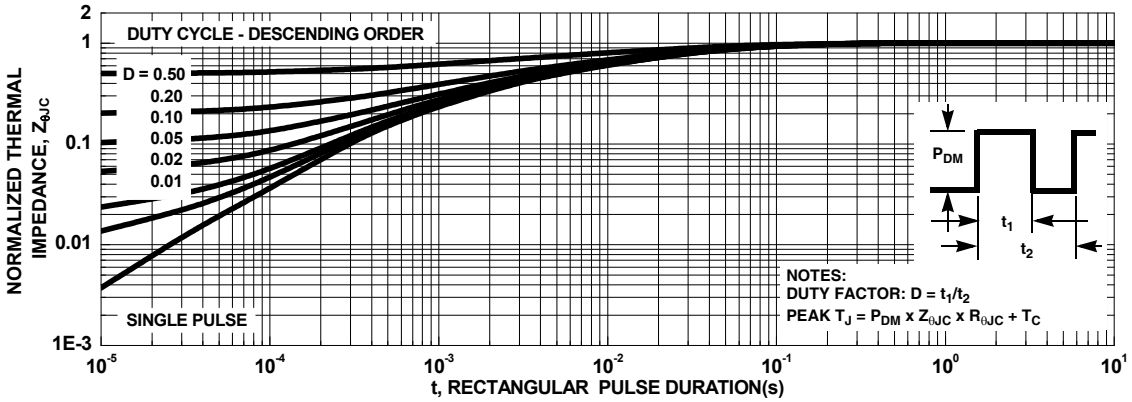


Figure 18. IGBT Normalized Transient Thermal Impedance, Junction to Case

Downloaded from Arrow.com.

Test Circuit and Waveforms

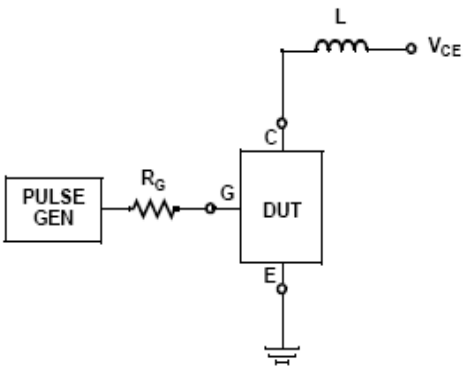


Figure 19. Inductive Switching Test Circuit

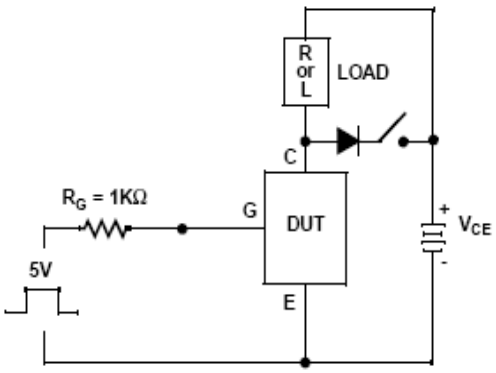


Figure 20. t_{ON} and t_{OFF} Switching Test Circuit

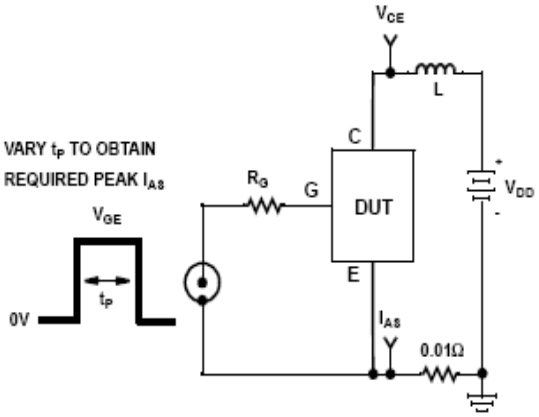


Figure 21. Energy Test Circuit



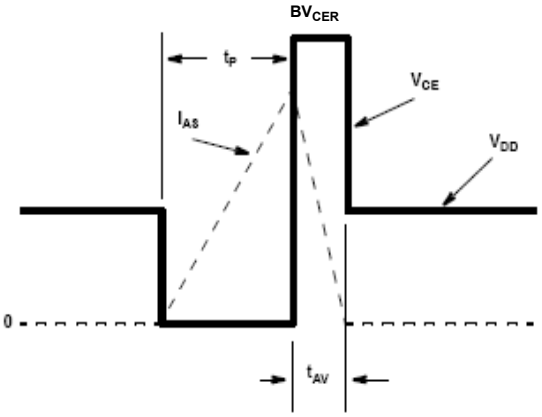



Figure 22. Energy Waveforms

Downloaded from Arrow.com.

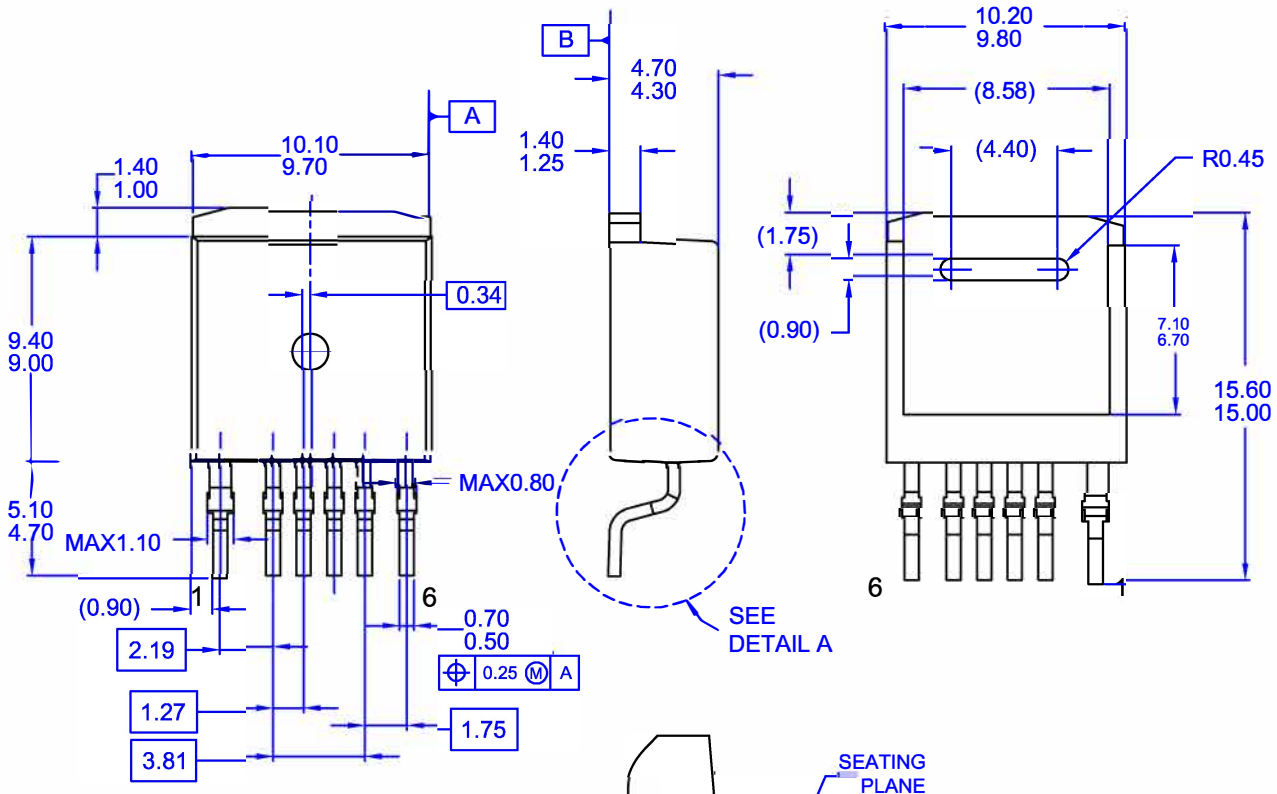

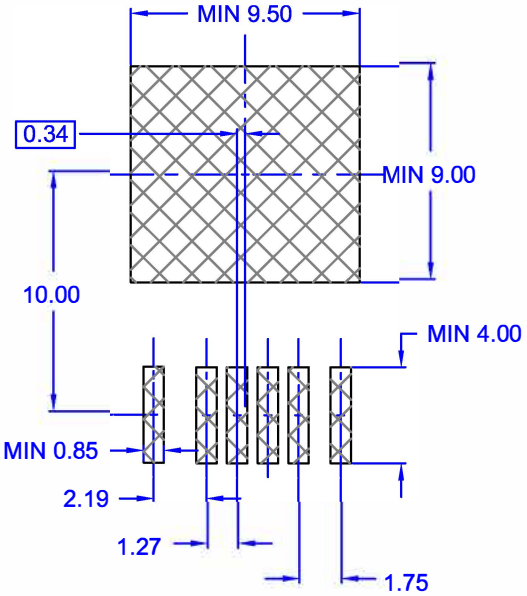

LAND PATTERN RECOMMENDATION

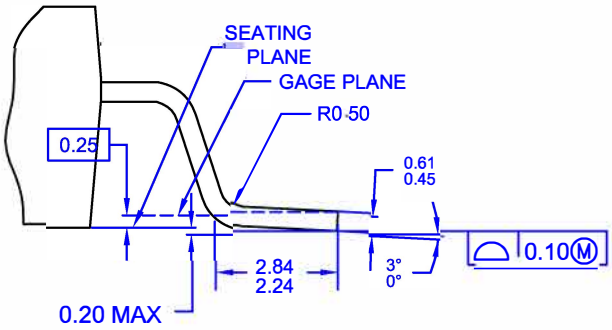

DETAIL A, ROTATED 90°
SCALE: 2X

NOTES: UNLESS OTHERWISE SPECIFIED
A) THIS PACKAGE DOES NOT COMPLY TO ANY CURRENT PACKAGING STANDARD.
B) ALL DIMENSIONS ARE IN MILLIMETERS.
C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
D) DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994
E) DRAWING FILENAME AND REVISION: MKT-TO263A06REV6

Downloaded from Arrow.com.

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

Downloaded from Arrow.com.