

Chassis Mount

ECO Series

EcoTran Standard Series Transformer

International CE Transformers


Signal's ECO Transformers utilize split bobbin construction that provides superior isolation with no exposed metallic surfaces. Touch Safe terminal design eliminates potential shock hazards.

General Specifications

- Power 105, 140, 170, 200, 330, 450 VA Ratings
- Dielectric Strength: 4000 V
- Primaries: 115/230 V 50/60 Hz
- CEE Compliant Reinforced Insulation
- Dual Secondary Outputs for Series / Parallel Connection
- Insulation System: UL 1446 Class F 155°C
- Leakage Current: <30 μ A
- Touch Safe Terminals (IP20 type) offer a screw/binding clamp for hard wiring with optional 1/4" Fast-On
- Exterior Surfaces Rated UL 94 V2

Agency Certifications

- The EcoTran Series are CEE compliant: IEC 61558-1, parts 2-4, 2-6
- Insulation System: UL 1446 Class F insulation 155°C
- UL Listed to UL 5085-1, UL5085-2, CSA C22.2 No. 66.1-06, CSA C22.2 No. 66.2-06
- CEE compliant, EU/EC Declaration of Conformity / TUV Rheinland

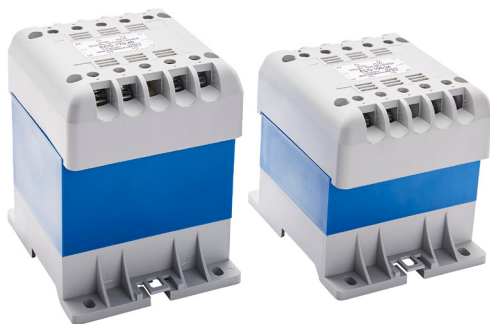

belfuse.com/signal



Please read our datasheet & drawing disclaimer [here](#).

Mechanical Selection

VA			Dimensions			Mounting Screw	Weight
	L	W	H	ML	MW		
	inches (mm)						lbs (kg)
105	3.54 (90)	4.17 (106)	3.78 (96)	2.69 (68.5)	3.54 (90)	#10	3.7 (1.68)
140	3.54 (90)	4.17 (106)	4.17 (106)	2.69 (68.5)	3.54 (90)	#10	4.6 (2.08)
170	3.54 (90)	4.17 (106)	4.57 (116)	2.69 (68.5)	3.54 (90)	#10	5.4 (2.45)
200	3.54 (90)	4.17 (106)	4.57 (116)	2.69 (68.5)	3.54 (90)	#10	5.6 (2.54)
330	4.96 (126)	5.35 (136)	4.50 (114.3)	3.78 (96)	4.76 (121)	#10*	9.1 (4.13)
450	4.96 (126)	5.35 (136)	4.90 (124.5)	3.78 (96)	4.76 (121)	#10*	11.5 (5.21)

Part Number Specification

Part Number	Secondary Series	Secondary Parallel
ECO-105-24	24 VCT @ 4.3 A	12 V @ 8.7 A
ECO-140-24	24 VCT @ 5.8 A	12 V @ 11.6 A
ECO-170-24	24 VCT @ 7.0 A	12 V @ 14.0 A
ECO-200-24	24 VCT @ 8.3 A	12 V @ 16.6 A
ECO-330-24	24 VCT @ 13.7 A	12 V @ 27.5 A
ECO-450-24	24 VCT @ 18.7 A	12 V @ 37.5 A
ECO-105-28	28 VCT @ 3.7 A	14 V @ 7.4 A
ECO-140-28	28 VCT @ 5.0 A	14 V @ 10.0 A
ECO-170-28	28 VCT @ 6.0 A	14 V @ 12.0 A
ECO-200-28	28 VCT @ 7.1 A	14 V @ 14.2 A
ECO-330-28	28 VCT @ 11.7 A	14 V @ 23.4 A
ECO-450-28	28 VCT @ 16.0 A	14 V @ 32.0 A
ECO-105-40	40 VCT @ 2.6 A	20 V @ 5.2 A
ECO-140-40	40 VCT @ 3.5 A	20 V @ 7.0 A
ECO-170-40	40 VCT @ 4.2 A	20 V @ 8.4 A
ECO-200-40	40 VCT @ 5.0 A	20 V @ 10.0 A
ECO-330-40	40 VCT @ 8.2 A	20 V @ 16.4 A
ECO-450-40	40 VCT @ 11.3 A	20 V @ 22.6 A
ECO-105-48	48 VCT @ 2.2 A	24 V @ 4.4 A
ECO-140-48	48 VCT @ 2.9 A	24 V @ 5.8 A
ECO-170-48	48 VCT @ 3.5 A	24 V @ 7.0 A
ECO-200-48	48 VCT @ 4.1 A	24 V @ 8.2 A
ECO-330-48	48 VCT @ 6.8 A	24 V @ 13.7 A
ECO-450-48	48 VCT @ 9.4 A	24 V @ 18.8 A
ECO-105-230	230 VCT @ 0.45 A	115 V @ 0.91 A
ECO-140-230	230 VCT @ 0.61 A	115 V @ 1.2 A
ECO-170-230	230 VCT @ 0.74 A	115 V @ 1.5 A
ECO-200-230	230 VCT @ 0.87 A	115 V @ 1.7 A
ECO-330-230	230 VCT @ 1.40 A	115 V @ 2.8 A
ECO-450-230	230 VCT @ 2.00 A	115 V @ 4.0 A

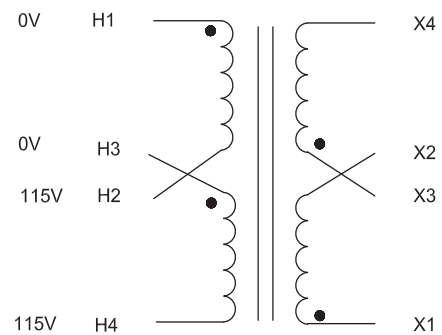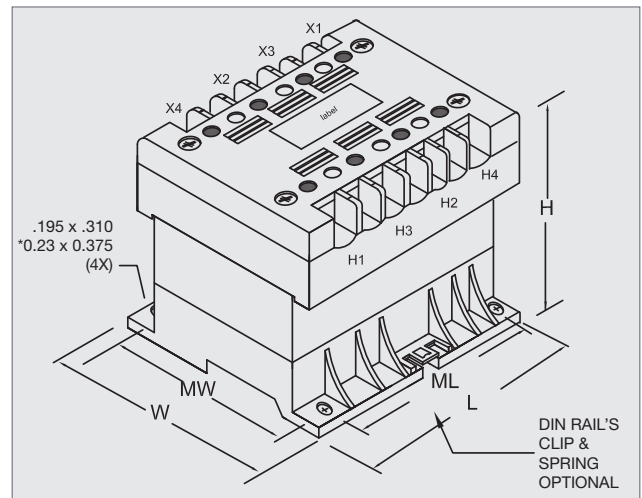

Custom versions available upon request.

128 Atlantic Avenue, Lynbrook, NY 11563

Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208

sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal

