



Is Now Part of



**ON Semiconductor®**

To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at [www.onsemi.com](http://www.onsemi.com). Please email any questions regarding the system integration to [Fairchild\\_questions@onsemi.com](mailto:Fairchild_questions@onsemi.com).

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## MM74HC4316

### Quad Analog Switch with Level Translator

#### General Description

The MM74HC4316 devices are digitally controlled analog switches implemented in advanced silicon-gate CMOS technology. These switches have low "ON" resistance and low "OFF" leakages. They are bidirectional switches, thus any analog input may be used as an output and vice-versa. Three supply pins are provided on the MM74HC4316 to implement a level translator which enables this circuit to operate with 0–6V logic levels and up to  $\pm 6V$  analog switch levels. The MM74HC4316 also has a common enable input in addition to each switch's control which when HIGH will disable all switches to their OFF state. All analog inputs and outputs and digital inputs are protected from electrostatic damage by diodes to  $V_{CC}$  and ground.

#### Features


- Typical switch enable time: 20 ns
- Wide analog input voltage range:  $\pm 6V$
- Low "ON" resistance:  
50 typ. ( $V_{CC}-V_{EE} = 4.5V$ ) 30 typ. ( $V_{CC}-V_{EE} = 9V$ )
- Low quiescent current: 80  $\mu A$  maximum (74HC)
- Matched switch characteristics
- Individual switch controls plus a common enable

#### Ordering Code:


| Order Number  | Package Number | Package Description                                                         |
|---------------|----------------|-----------------------------------------------------------------------------|
| MM74HC4316M   | M16A           | 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow |
| MM74HC4316SJ  | M16D           | 16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide               |
| MM74HC4316MTC | MTC16          | 16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide |
| MM74HC4316N   | N16E           | 16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide       |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### Logic Diagram

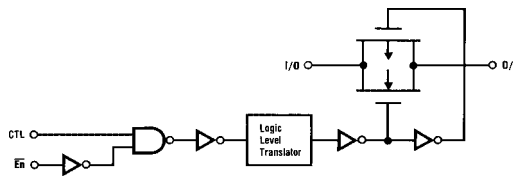

#### Connection Diagram

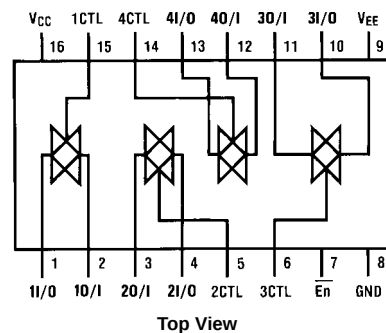

#### Truth Table

| Inputs          |     | Switch  |
|-----------------|-----|---------|
| $\overline{En}$ | CTL | I/O–O/I |
| H               | X   | "OFF"   |
| L               | L   | "OFF"   |
| L               | H   | "ON"    |

**Absolute Maximum Ratings** (Note 1)

(Note 2)

|                                                  |                                 |
|--------------------------------------------------|---------------------------------|
| Supply Voltage ( $V_{CC}$ )                      | -0.5 to +7.5V                   |
| Supply Voltage ( $V_{EE}$ )                      | +0.5 to -7.5V                   |
| DC Control Input Voltage ( $V_{IN}$ )            | -1.5 to $V_{CC}$ +1.5V          |
| DC Switch I/O Voltage ( $V_{IO}$ )               | $V_{EE}$ -0.5 to $V_{CC}$ +0.5V |
| Clamp Diode Current ( $I_{IK}$ , $I_{OK}$ )      | ±20 mA                          |
| DC Output Current, per pin ( $I_{OUT}$ )         | ±25 mA                          |
| DC $V_{CC}$ or GND Current, per pin ( $I_{CC}$ ) | ±50 mA                          |
| Storage Temperature Range ( $T_{STG}$ )          | -65°C to +150°C                 |
| Power Dissipation ( $P_D$ )                      |                                 |
| (Note 3)                                         | 600 mW                          |
| S.O. Package only                                | 500 mW                          |
| Lead Temperature ( $T_L$ )                       |                                 |
| (Soldering 10 seconds)                           | 260°C                           |

**Recommended Operating Conditions**

|                                       | Min | Max      | Units |
|---------------------------------------|-----|----------|-------|
| Supply Voltage ( $V_{CC}$ )           | 2   | 6        | V     |
| Supply Voltage ( $V_{EE}$ )           | 0   | -6       | V     |
| DC Input or Output Voltage            |     |          |       |
| ( $V_{IN}$ , $V_{OUT}$ )              | 0   | $V_{CC}$ | V     |
| Operating Temperature Range ( $T_A$ ) | -40 | +85      | °C    |
| Input Rise or Fall Times              |     |          |       |
| ( $t_r$ , $t_f$ ) $V_{CC}$ = 2.0V     |     | 1000     | ns    |
| $V_{CC}$ = 4.5V                       |     | 500      | ns    |
| $V_{CC}$ = 6.0V                       |     | 400      | ns    |
| $V_{CC}$ = 12.0V                      |     | 250      | ns    |

**Note 1:** Absolute Maximum Ratings are those values beyond which damage to the device may occur.

**Note 2:** Unless otherwise specified all voltages are referenced to ground.

**Note 3:** Power Dissipation temperature derating — plastic "N" package: — 12 mW/°C from 65°C to 85°C.

**DC Electrical Characteristics** (Note 4)

| Symbol          | Parameter                            | Conditions                                                                                                                                                    | V <sub>EE</sub> | V <sub>CC</sub>                  | T <sub>A</sub> = 25°C                                                                      |                   | T <sub>A</sub> = −40 to 85°C | T <sub>A</sub> = −55 to 125°C | Units |    |   |
|-----------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------------|--------------------------------------------------------------------------------------------|-------------------|------------------------------|-------------------------------|-------|----|---|
|                 |                                      |                                                                                                                                                               |                 |                                  | Typ                                                                                        | Guaranteed Limits |                              |                               |       |    |   |
| V <sub>IH</sub> | Minimum HIGH Level Input Voltage     |                                                                                                                                                               |                 | 2.0V                             |                                                                                            | 1.5               | 1.5                          | 1.5                           | V     |    |   |
|                 |                                      |                                                                                                                                                               |                 | 4.5V                             |                                                                                            | 3.15              | 3.15                         | 3.15                          | V     |    |   |
|                 |                                      |                                                                                                                                                               |                 | 6.0V                             |                                                                                            | 4.2               | 4.2                          | 4.2                           | V     |    |   |
| V <sub>IL</sub> | Maximum LOW Level Input Voltage      |                                                                                                                                                               |                 | 2.0V                             |                                                                                            | 0.5               | 0.5                          | 0.5                           | V     |    |   |
|                 |                                      |                                                                                                                                                               |                 | 4.5V                             |                                                                                            | 1.35              | 1.35                         | 1.35                          | V     |    |   |
|                 |                                      |                                                                                                                                                               |                 | 6.0V                             |                                                                                            | 1.8               | 1.8                          | 1.8                           | V     |    |   |
| R <sub>ON</sub> | Minimum "ON" Resistance (Note 5)     | V <sub>CTL</sub> = V <sub>IH</sub> , I <sub>S</sub> = 2.0 mA<br>V <sub>IS</sub> = V <sub>CC</sub> to V <sub>EE</sub><br>(Figure 1)                            | GND             | 4.5V                             | 100                                                                                        | 170               | 200                          | 220                           | Ω     |    |   |
|                 |                                      |                                                                                                                                                               | −4.5V           | 4.5V                             | 40                                                                                         | 85                | 105                          | 110                           | Ω     |    |   |
|                 |                                      |                                                                                                                                                               | −6.0V           | 6.0V                             | 30                                                                                         | 70                | 85                           | 90                            | Ω     |    |   |
|                 |                                      | V <sub>CTL</sub> = V <sub>IH</sub> , I <sub>S</sub> = 2.0 mA<br>V <sub>IS</sub> = V <sub>CC</sub> or V <sub>EE</sub><br>(Figure 1)                            | GND             | 2.0V                             | 100                                                                                        | 180               | 215                          | 240                           | Ω     |    |   |
|                 |                                      |                                                                                                                                                               | GND             | 4.5V                             | 40                                                                                         | 80                | 100                          | 120                           | Ω     |    |   |
|                 |                                      |                                                                                                                                                               | −4.5V           | 4.5V                             | 50                                                                                         | 60                | 75                           | 80                            | Ω     |    |   |
|                 |                                      |                                                                                                                                                               | −6.0V           | 6.0V                             | 20                                                                                         | 40                | 60                           | 70                            | Ω     |    |   |
|                 |                                      |                                                                                                                                                               | R <sub>ON</sub> | Maximum "ON" Resistance Matching | V <sub>CTL</sub> = V <sub>IH</sub><br>V <sub>IS</sub> = V <sub>CC</sub> to V <sub>EE</sub> | GND               | 4.5V                         | 10                            | 15    | 20 | Ω |
|                 |                                      |                                                                                                                                                               |                 |                                  |                                                                                            | −4.5V             | 4.5V                         | 5                             | 10    | 15 | Ω |
| −6.0V           | 6.0V                                 | 5                                                                                                                                                             |                 |                                  |                                                                                            | 10                | 15                           | Ω                             |       |    |   |
| I <sub>IN</sub> | Maximum Control Input Current        | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                                                                                      | GND             | 6.0V                             |                                                                                            | ±0.1              | ±1.0                         | ±1.0                          | μA    |    |   |
| I <sub>IZ</sub> | Maximum Switch "OFF" Leakage Current | V <sub>OS</sub> = V <sub>CC</sub> or V <sub>EE</sub><br>V <sub>IS</sub> = V <sub>EE</sub> or V <sub>CC</sub><br>V <sub>CTL</sub> = V <sub>IL</sub> (Figure 2) | GND             | 6.0V                             |                                                                                            | ±60               | ±600                         | ±600                          | nA    |    |   |
|                 |                                      |                                                                                                                                                               | −6.0V           | 6.0V                             |                                                                                            | ±100              | ±1000                        | ±1000                         | nA    |    |   |
| I <sub>IZ</sub> | Maximum Switch "ON" Leakage Current  | V <sub>IS</sub> = V <sub>CC</sub> to V <sub>EE</sub><br>V <sub>CTL</sub> = V <sub>IH</sub> , V <sub>OS</sub> = OPEN<br>(Figure 3)                             | GND             | 6.0V                             |                                                                                            | ±40               | ±150                         | ±150                          | nA    |    |   |
|                 |                                      |                                                                                                                                                               | −6.0V           | 6.0V                             |                                                                                            | ±60               | ±300                         | ±300                          | nA    |    |   |
| I <sub>CC</sub> | Maximum Quiescent Supply Current     | V <sub>IN</sub> = V <sub>CC</sub> or GND<br>I <sub>OUT</sub> = 0 μA                                                                                           | GND             | 6.0V                             |                                                                                            | 2.0               | 20                           | 40                            | μA    |    |   |
|                 |                                      |                                                                                                                                                               | −6.0V           | 6.0V                             |                                                                                            | 8.0               | 80                           | 160                           | μA    |    |   |

**Note 4:** For a power supply of 5V ±10% the worst case on resistances ( $R_{ON}$ ) occurs for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case  $V_{IH}$  and  $V_{IL}$  occur at  $V_{CC} = 5.5\text{V}$  and 4.5V respectively. (The  $V_{IH}$  value at 5.5V is 3.85V.) The worst case leakage current occurs for CMOS at the higher voltage and so the 5.5V values should be used.

**Note 5:** At supply voltages ( $V_{CC}-V_{EE}$ ) approaching 2V the analog switch on resistance becomes extremely non-linear. Therefore it is recommended that these devices be used to transmit digital only when using these supply voltages.

## AC Electrical Characteristics

$V_{CC} = 2.0V-6.0V$ ,  $V_{EE} = 0V-6V$ ,  $C_L = 50$  pF (unless otherwise specified)

| Symbol           | Parameter                                           | Conditions                                                                                                                            | V <sub>EE</sub> | V <sub>CC</sub> | T <sub>A</sub> = +25°C |                   | T <sub>A</sub> = -40°C to +85°C |     | T <sub>A</sub> = -55°C to +125°C |  | Units |
|------------------|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|------------------------|-------------------|---------------------------------|-----|----------------------------------|--|-------|
|                  |                                                     |                                                                                                                                       |                 |                 | Typ                    | Guaranteed Limits |                                 |     |                                  |  |       |
| t <sub>PHL</sub> | Maximum Propagation Delay Switch In to Out          |                                                                                                                                       | GND             | 2.0V            | 25                     | 50                | 63                              | 75  | ns                               |  |       |
| t <sub>PLH</sub> |                                                     |                                                                                                                                       | GND             | 4.5V            | 5                      | 10                | 13                              | 15  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | 4                      | 8                 | 12                              | 14  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -6.0V           | 6.0V            | 3                      | 7                 | 11                              | 13  | ns                               |  |       |
| t <sub>PZL</sub> | Maximum Switch Turn "ON" Delay (Control)            | R <sub>L</sub> = 1 kΩ                                                                                                                 | GND             | 2.0V            | 30                     | 165               | 206                             | 250 | ns                               |  |       |
| t <sub>PZH</sub> |                                                     |                                                                                                                                       | GND             | 4.5V            | 20                     | 35                | 43                              | 53  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | 15                     | 32                | 39                              | 48  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -6.0V           | 6.0V            | 14                     | 30                | 37                              | 45  | ns                               |  |       |
| t <sub>PHZ</sub> | Maximum Switch Turn "OFF" Delay (Control)           | R <sub>L</sub> = 1 kΩ                                                                                                                 | GND             | 2.0V            | 45                     | 250               | 312                             | 375 | ns                               |  |       |
| t <sub>PLZ</sub> |                                                     |                                                                                                                                       | GND             | 4.5V            | 25                     | 50                | 63                              | 75  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | 20                     | 44                | 55                              | 66  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -6.0V           | 6.0V            | 20                     | 44                | 55                              | 66  | ns                               |  |       |
| t <sub>PZL</sub> | Maximum Switch Turn "ON" Delay (Enable)             |                                                                                                                                       | GND             | 2.0V            | 35                     | 205               | 256                             | 308 | ns                               |  |       |
| t <sub>PZH</sub> |                                                     |                                                                                                                                       | GND             | 4.5V            | 20                     | 41                | 52                              | 62  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | 19                     | 38                | 48                              | 57  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -6.0V           | 6.0V            | 18                     | 36                | 45                              | 54  | ns                               |  |       |
| t <sub>PLZ</sub> | Maximum Switch Turn "OFF" Delay (Enable)            |                                                                                                                                       | GND             | 2.0V            | 58                     | 265               | 330                             | 400 | ns                               |  |       |
| t <sub>PHZ</sub> |                                                     |                                                                                                                                       | GND             | 4.5V            | 28                     | 53                | 67                              | 79  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | 23                     | 47                | 59                              | 70  | ns                               |  |       |
|                  |                                                     |                                                                                                                                       | -6.0V           | 6.0V            | 21                     | 47                | 59                              | 70  | ns                               |  |       |
| f <sub>MAX</sub> | Minimum Frequency Response (Figure 7)               | R <sub>L</sub> = 600Ω, V <sub>IS</sub> = 2V <sub>PP</sub> at (V <sub>CC</sub> -V <sub>EE</sub> /2)                                    | 0V              | 4.5             | 40                     |                   |                                 |     | MHz                              |  |       |
|                  | 20 log (V <sub>OS</sub> /V <sub>IS</sub> ) = -3 dB  | (Note 6) (Note 7)                                                                                                                     | -4.5V           | 4.5V            | 100                    |                   |                                 |     | MHz                              |  |       |
|                  | Control to Switch Feedthrough Noise (Figure 8)      | R <sub>L</sub> = 600Ω, F = 1 MHz<br>C <sub>L</sub> = 50 pF (Note 7) (Note 8)                                                          | 0V              | 4.5V            | 100                    |                   |                                 |     | mV                               |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | 250                    |                   |                                 |     | mV                               |  |       |
|                  | Crosstalk Between any Two Switches (Figure 9)       | R <sub>L</sub> = 600Ω, F = 1 MHz                                                                                                      | 0V              | 4.5V            | -52                    |                   |                                 |     | dB                               |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | -50                    |                   |                                 |     | dB                               |  |       |
|                  | Switch OFF Signal Feedthrough Isolation (Figure 10) | R <sub>L</sub> = 600Ω, F = 1 MHz<br>V <sub>CTL</sub> = V <sub>IL</sub> (Note 7) (Note 8)                                              | 0V              | 4.5V            | -42                    |                   |                                 |     | dB                               |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | -44                    |                   |                                 |     | dB                               |  |       |
| THD              | Sinewave Harmonic Distortion (Figure 11)            | R <sub>L</sub> = 10 KΩ, C <sub>L</sub> = 50 pF, F = 1 KHz<br>V <sub>IS</sub> = 4V <sub>PP</sub><br>V <sub>IS</sub> = 8V <sub>PP</sub> | 0V              | 4.5V            | 0.013                  |                   |                                 |     | %                                |  |       |
|                  |                                                     |                                                                                                                                       | -4.5V           | 4.5V            | 0.008                  |                   |                                 |     | %                                |  |       |
| C <sub>IN</sub>  | Maximum Control Input Capacitance                   |                                                                                                                                       |                 |                 | 5                      |                   |                                 |     | pF                               |  |       |
| C <sub>IN</sub>  | Maximum Switch Input Capacitance                    |                                                                                                                                       |                 |                 | 35                     |                   |                                 |     | pF                               |  |       |
| C <sub>IN</sub>  | Maximum Feedthrough Capacitance                     | V <sub>CTL</sub> = GND                                                                                                                |                 |                 | 0.5                    |                   |                                 |     | pF                               |  |       |
| C <sub>PD</sub>  | Power Dissipation Capacitance                       |                                                                                                                                       |                 |                 | 15                     |                   |                                 |     | pF                               |  |       |

**Note 6:** Adjust 0 dBm for  $F = 1$  KHz (Null  $R_L/R_{on}$  Attenuation).

**Note 7:**  $V_{IS}$  is centered at  $V_{CC}-V_{EE}/2$ .

**Note 8:** Adjust for 0 dBm.

## AC Test Circuits and Switching Time Waveforms

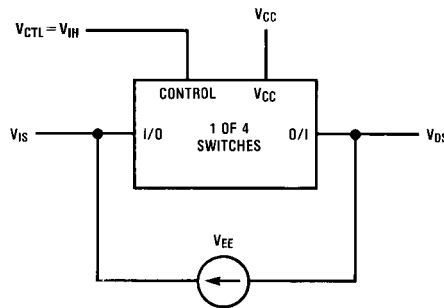


FIGURE 1. "ON" Resistance

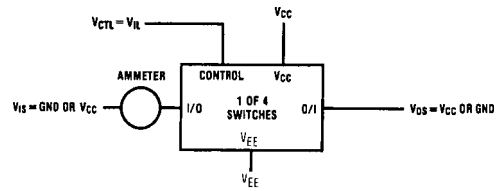


FIGURE 2. "OFF" Channel Leakage Current

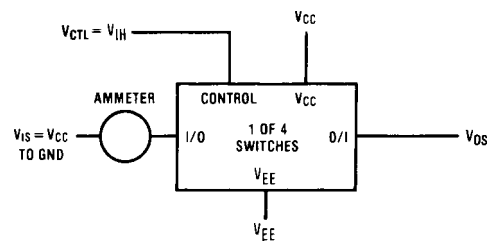
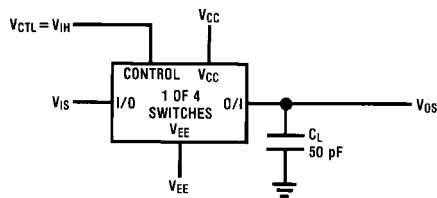

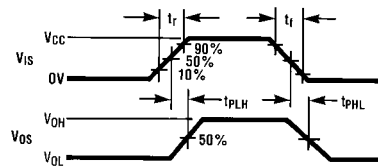
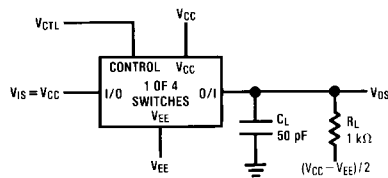
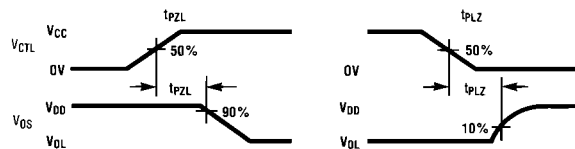
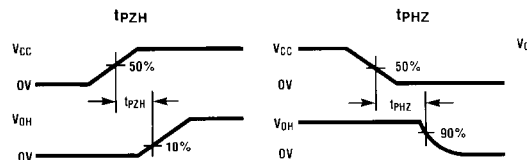


FIGURE 3. "ON" Channel Leakage Current

FIGURE 4.  $t_{PHL}$ ,  $t_{PLH}$  Propagation Delay Time Signal Input to Signal OutputFIGURE 5.  $t_{PZL}$ ,  $t_{PLZ}$  Propagation Delay Time Control to Signal OutputFIGURE 6.  $t_{PZH}$ ,  $t_{PHZ}$  Propagation Delay Time Control to Signal Output

## AC Test Circuits and Switching Time Waveforms (Continued)

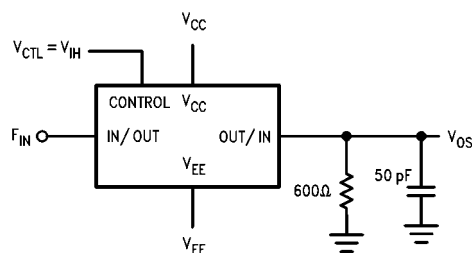


FIGURE 7. Frequency Response

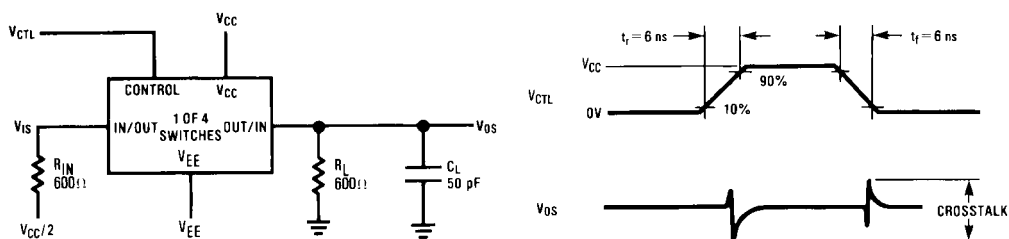


FIGURE 8. Crosstalk: Control Input to Signal Output

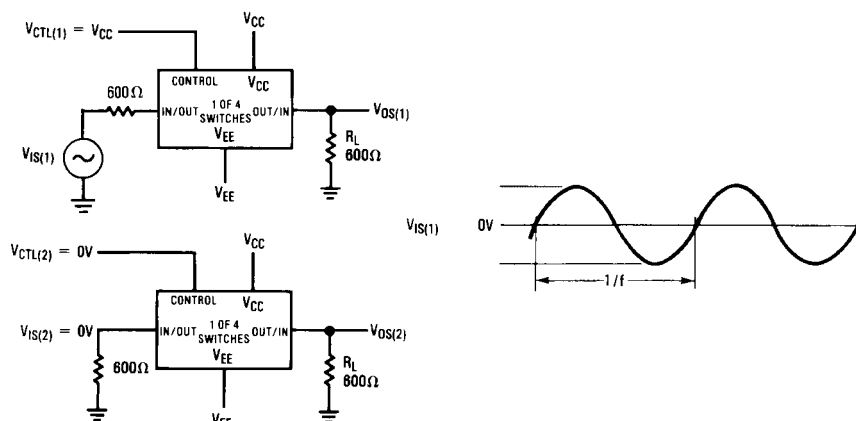


FIGURE 9. : Crosstalk Between Any Two Switches

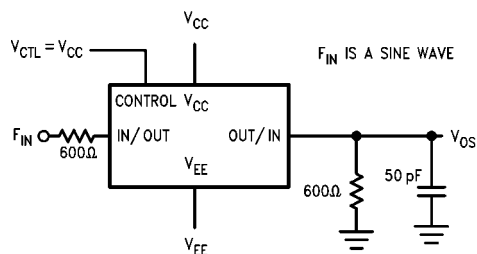


FIGURE 10. Switch OFF Signal Feedthrough Isolation


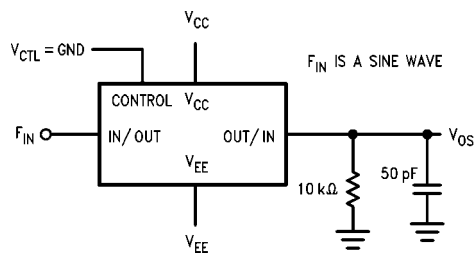



FIGURE 11. Sinewave Distortion

## Typical Performance Characteristics


Typical "ON" Resistance

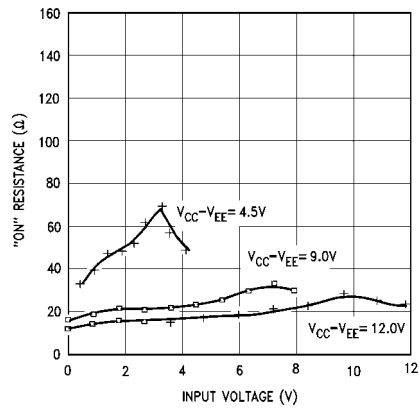

Typical Crosstalk Between Any Two Switches

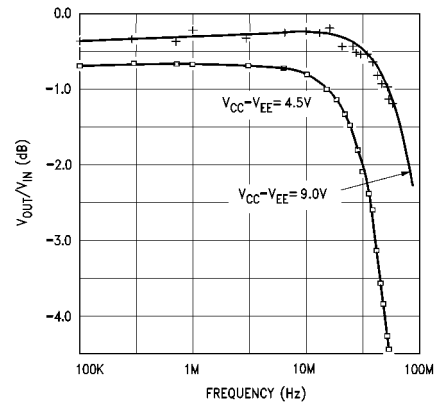

Typical Frequency Response

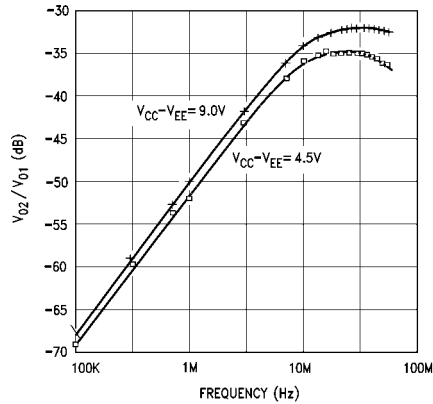


## Special Considerations

In certain applications the external load-resistor current may include both  $V_{CC}$  and signal line components. To avoid drawing  $V_{CC}$  current when switch current flows into



the analog switch input pins, the voltage drop across the switch must not exceed 0.6V (calculated from the On Resistance).

**Physical Dimensions** inches (millimeters) unless otherwise noted

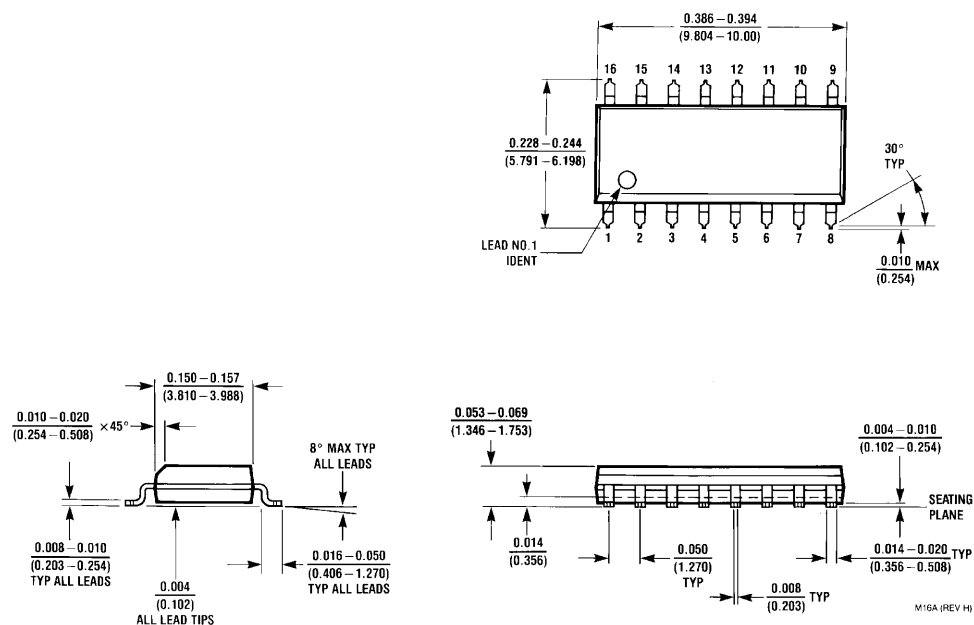


**16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow  
Package Number M16A**

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

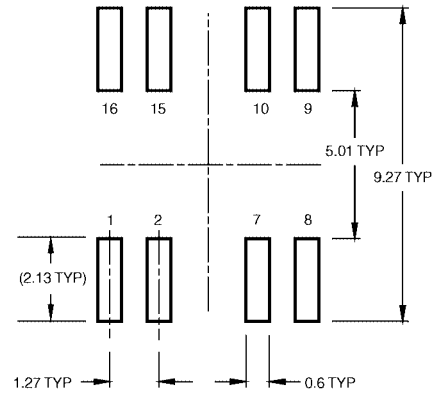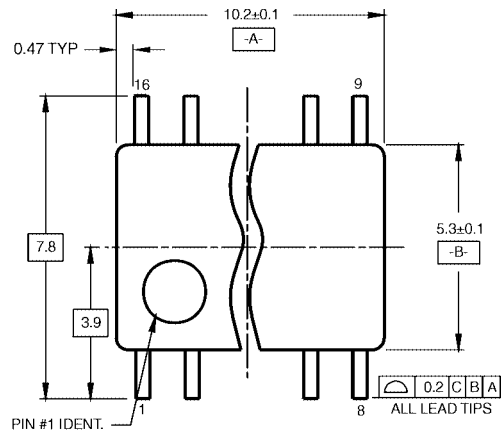

LAND PATTERN RECOMMENDATION


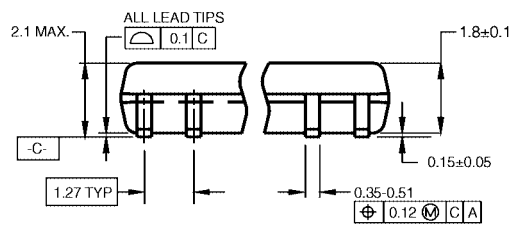


DIMENSIONS ARE IN MILLIMETERS

## NOTES:


- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.

M16DRevB1

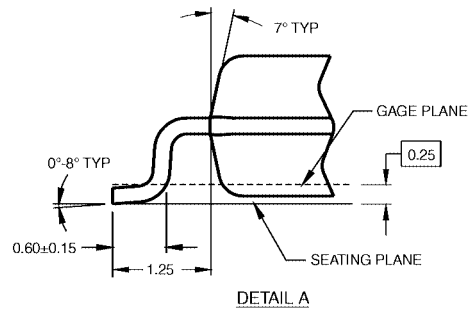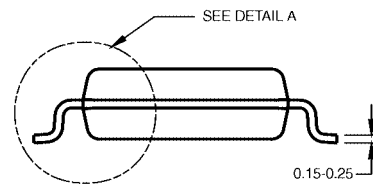


DETAIL A

**16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide  
Package Number M16D**

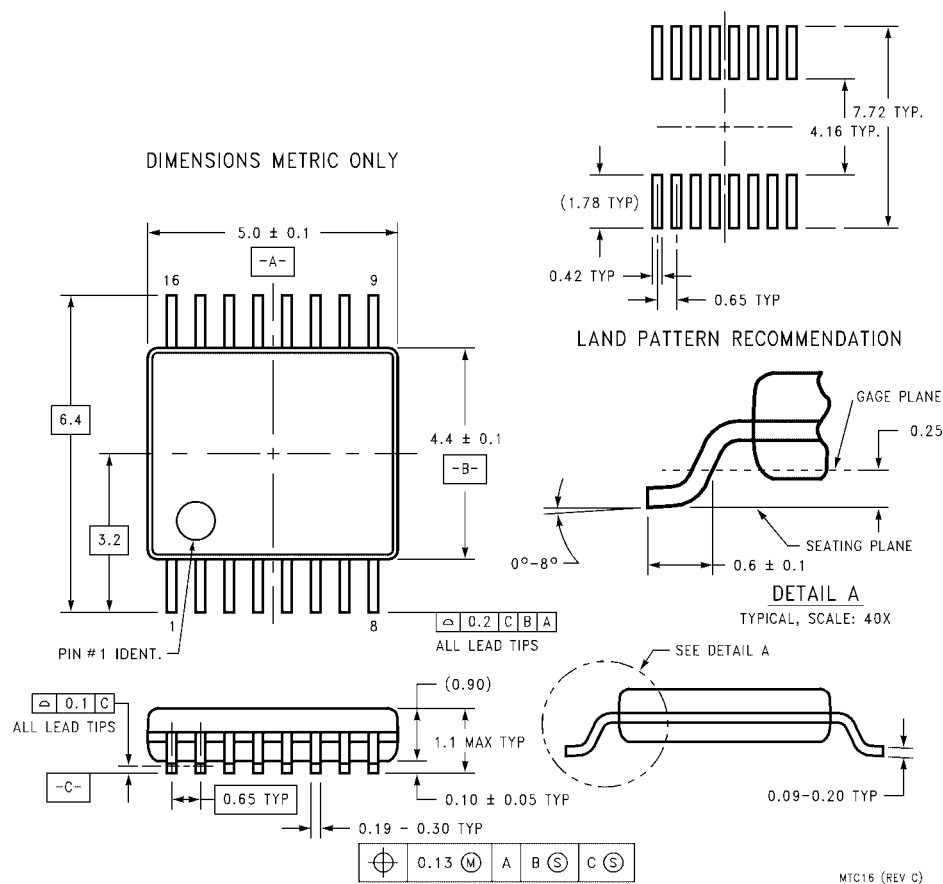**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)


**16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  
Package Number MTC16**

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

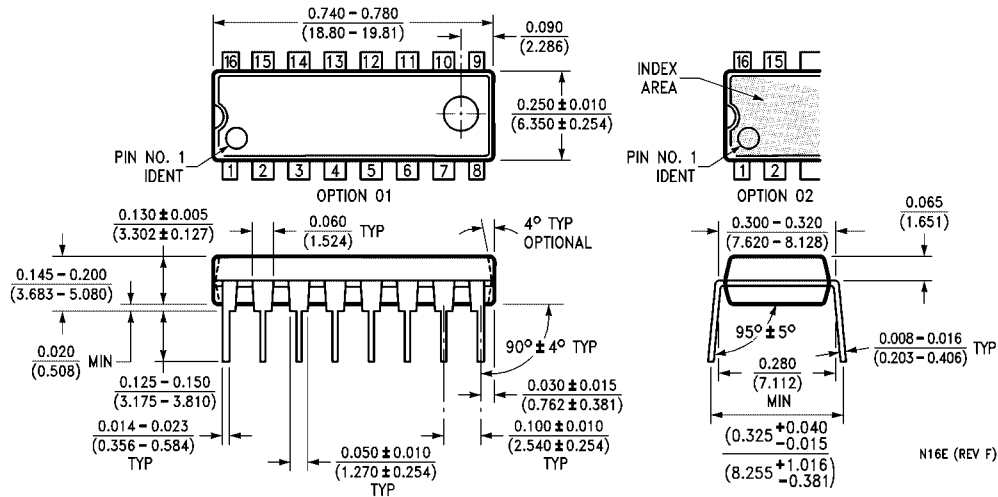

16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide  
Package Number N16E

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative