


Filter for low leakage current application




- Low leakage EMC filter with high performance options
- Improvement of system reliability
- Tight packaged EMC filter
- Industry standard form factor



Performance indicators

Attenuation performance

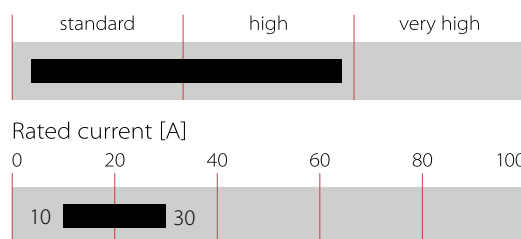

Technical Specifications

Maximum continuous operating voltage	530 / 305 VAC
Nominal operating voltage	480 VAC
Rated currents	10 - 30 A @ 50°C
Overload capability	1.5 x rated current for 1 minute once per hour
Operating frequency	DC to 60 Hz
High potential test voltage	2.28 kV DC 2s, phase to phase 2.26 kV DC 2s Repetition with max. 80% of the HV test voltage
Operating voltage	530 / 305 VAC
Overvoltage category	III (acc. IEC 60664-1)
Pollution degree	PD2 (acc. IEC60664-1)
Surge withstand	2 kV, phase to phase (acc. to IEC 61000-4-5) 4 kV, phase to protected earth (acc. to IEC 61000-4-5)
Temperature range (operation and storage)	-40°C to +100°C (with derating >50°C)
Climatic category	40/100/21 (acc. IEC 60068-1)
Altitude	2000 m, current and voltage derating above
Protection category	IP 00 (acc. IEC 60529-1)
Flammability corresponding to	UL 94 V0
Vibration and shock	3M4 (cc. IEC60721-3-3) Vibration: 10 to 55Hz, 2G, 3min, 1h each direction Shock: 20G, 11ms once each axial
Design corresponding to	UL/IEC 60939-3 CSA C22.2 No. 8-13
MTBF (Mil-HB-217F)	>300,000 h @ 50°C/480V

Approvals & Compliances




Features and Benefits

- A plastic housing combined with a metal ground plate achieve the lowest possible product weight without compromising EMC behaviour
- The embedded terminals from Schaffner guarantee user-friendly handling and reliable, long-lasting electrical connection
- Fixed, hinged terminal covers contribute to overall safety by providing protection against unintended contact with live conductors. They are included in the standard scope of delivery without any extra cost
- Very low leakage current values make the filters suitable for grids with very tough requirements and for applications which set value on safety and reliability
- FN3040 feature an ecologically conscious construction without the use of potting compound or banned substances (RoHS). Used raw materials can be easily separated at the end of the product life time for proper and environmentally safe disposal

Typical Applications

- Electrical and electronic equipment
- Test and measurement devices
- Medical devices & Industrial automation
- Small machines

Typical electrical schematic

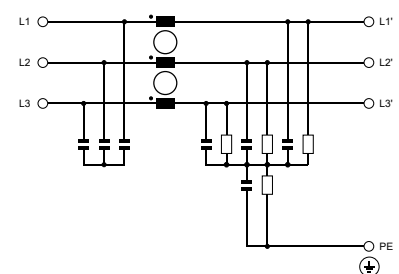

Filter Selection Table

Filter	Core*	Rated current @ 50°C	Leakage current** 530 V/50 Hz	Typical Power loss*** @ 25°C	Weight [kg]	Input/ Output connections
		[A]	[mA]	[W]		
Standard Housing						
FN3040-10-61-C19-R65	MnZn	10	0.19	6.0	0.45	-61
FN3040-10-61-C20-R65	MnZn	10	0.28	6.0	0.45	-61
FN3040-10-61-C21-R65	MnZn	10	0.40	6.0	0.45	-61
FN3040-20-61-C19-R65	MnZn	20	0.19	8.4	0.45	-61
FN3040-20-61-C20-R65	MnZn	20	0.28	8.4	0.45	-61
FN3040-20-61-C21-R65	MnZn	20	0.40	8.4	0.45	-61
FN3040-30-61-C19-R65	MnZn	30	0.19	9.5	0.45	-61
FN3040-30-61-C20-R65	MnZn	30	0.28	9.5	0.45	-61
FN3040-30-61-C21-R65	MnZn	30	0.40	9.5	0.45	-61
FN3041-10-61-C21-R65	Nano	10	0.40	6.0	0.43	-61
FN3041-20-61-C21-R65	Nano	20	0.40	8.4	0.43	-61
FN3041-30-61-C21-R65	Nano	30	0.40	9.5	0.43	-61
DIN Rail Housing						
FN3042-10-61-C19-R65	MnZn	10	0.19	6.0	0.50	-61
FN3042-10-61-C20-R65	MnZn	10	0.28	6.0	0.50	-61
FN3042-10-61-C21-R65	MnZn	10	0.40	6.0	0.50	-61
FN3042-20-61-C19-R65	MnZn	20	0.19	8.4	0.50	-61
FN3042-20-61-C20-R65	MnZn	20	0.28	8.4	0.50	-61
FN3042-20-61-C21-R65	MnZn	20	0.40	8.4	0.50	-61
FN3042-30-61-C19-R65	MnZn	30	0.19	9.5	0.50	-61
FN3042-30-61-C20-R65	MnZn	30	0.28	9.5	0.50	-61
FN3042-30-61-C21-R65	MnZn	30	0.40	9.5	0.50	-61
FN3043-10-61-C21-R65	Nano	10	0.40	6.0	0.45	-61
FN3043-20-61-C21-R65	Nano	20	0.40	8.4	0.45	-61
FN3043-30-61-C21-R65	Nano	30	0.40	9.5	0.45	-61

* Core material: MnZn: Ferrite core material / nano: Nanocrystalline core material
** Maximum leakage current under normal operating conditions (acc. to IEC60939-3).
*** Power Loss [W] calculated: 3*RatedCurrent²*Max.DCRes

Product Selector

FN304x-yy-Czz-R65

zz – Y-capacitor Option

19: 100 nF

20: 150 nF

21: 220 nF

yy – Rated Current

10: 10 A

20: 20 A

30: 30 A

x – Core technology / Mechanical Mounting Version

0: Ferrite core / standard housing (recommended for most applications)

1: Nanocrystalline core / Standard housing (increased performance at ~150 kHz)


2: Ferrite core / DIN-rail mounting

3: Nanocrystalline core / DIN-rail mounting


Typical Filter Attenuation

Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym


FN3040-10-61-C19 and FN3042-10-61-C19

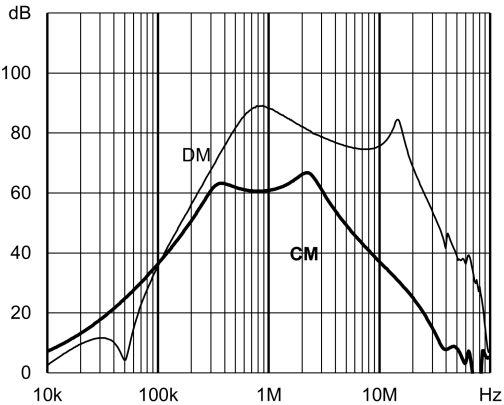


FN3040-10-61-C20 and FN3042-10-61-C20

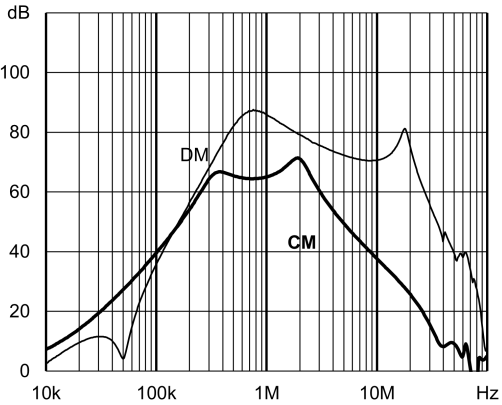


FN3040-10-61-C21 and FN3042-10-61-C21

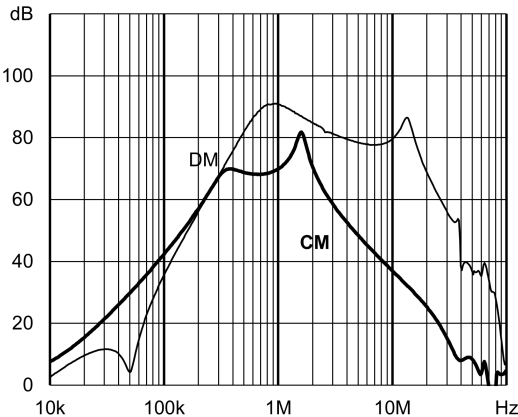


FN3040-20-61-C19 and FN3042-20-61-C19

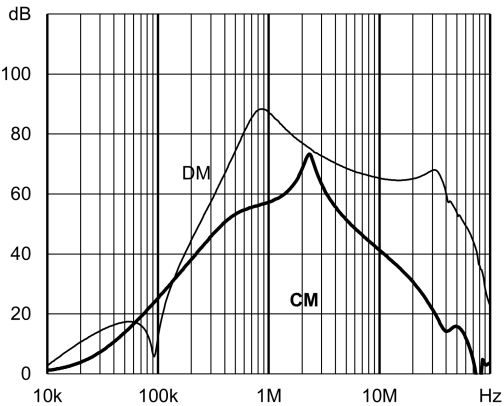


FN3040-20-61-C20 and FN3042-20-61-C20

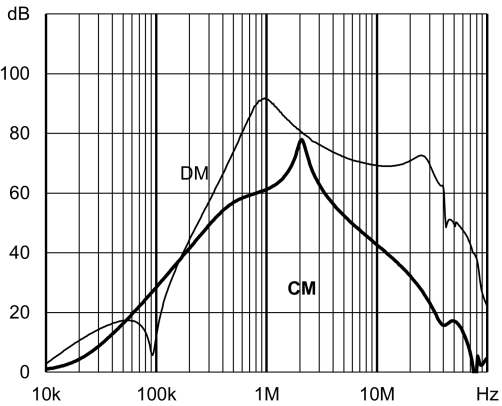


FN3040-20-61-C21 and FN3042-20-61-C21

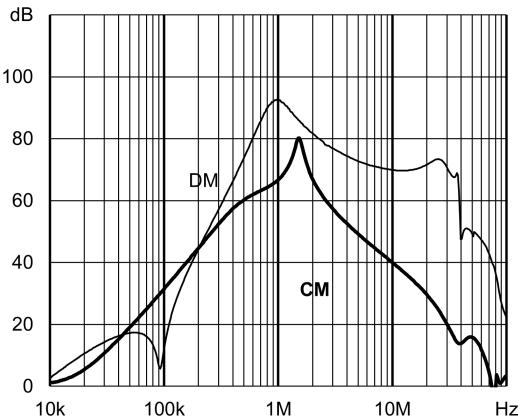


FN3040-30-61-C19 and FN3042-30-61-C19

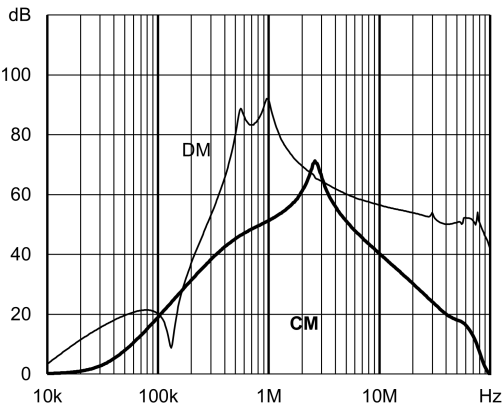


FN3040-30-61-C20 and FN3042-30-61-C20

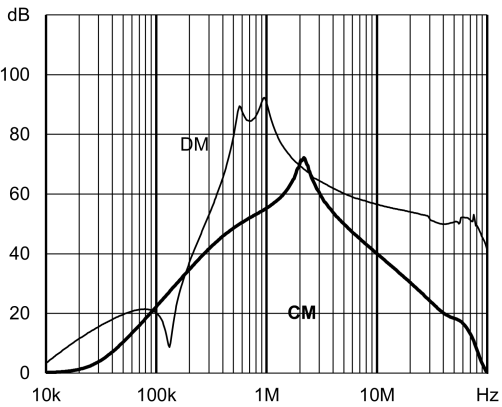


FN3040-30-61-C21 and FN3042-30-61-C21

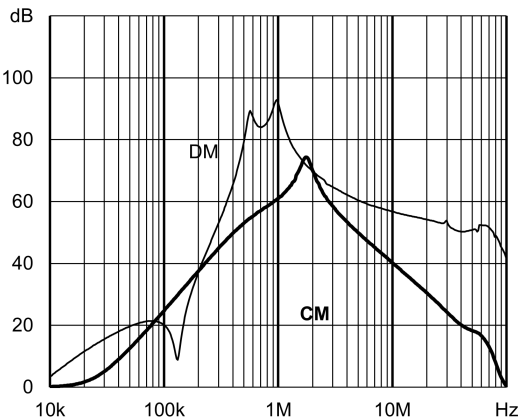


FN3041-10-61-C21 and FN3043-10-61-C21

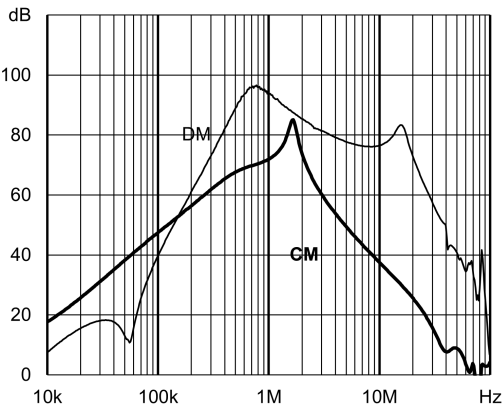

FN3041-20-61-C21 and FN3043-20-61-C21

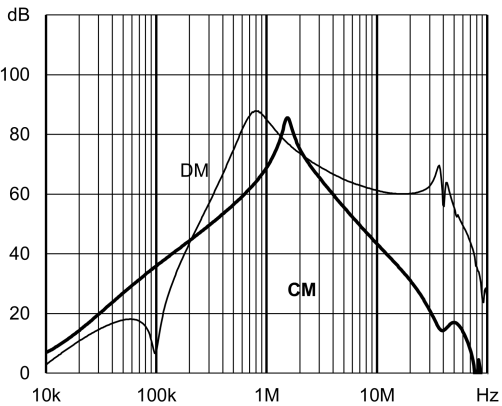

FN3041-30-61-C21 and FN3043-30-61-C21

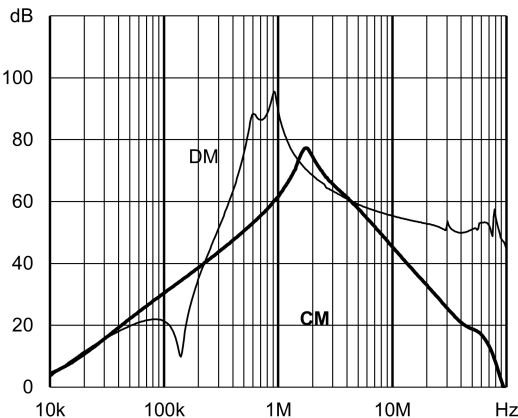

We are here to help



Read more insights from TE’s experts:

Schaffner is now part of TE Connectivity

→

Learn more about Corcom products

→

Connect With Us

We make it easier to connect with our experts and are ready to provide the support you need. Visit te.com/support to chat with a Product Information Specialist.

Contact a TE expert today

→

te.com

©2025 TE Connectivity plc. All Rights Reserved.

TE Connectivity, TE, TE connectivity (logo), and EVERY CONNECTION COUNTS, ECOSine, Schaffner are trademarks owned or licensed by TE Connectivity plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.