


MX45/46

Family of Low-Jitter Crystal Oscillators

Summary

Meet the MX45/46 any-rate crystal oscillators that offer unparalleled performance, flexibility and reliability making them ideal for high-frequency and low-jitter applications such as networking equipment, data centers, cloud computing and medical applications. The programmable oscillator utilizes a high-performance and low-power fractional PLL to generate any frequency between 2.5 MHz to 450 MHz to meet your application needs.

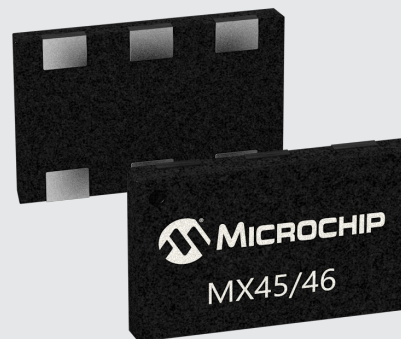


Key Features


- Low-phase noise: 650 fs typical/1 ps max (12 kHz–20 MHz)
- Supports any frequency between 2.5 MHz to 450 MHz
- Excellent frequency stability: ± 20 ppm over voltage and temperature
- Available in CMOS, LVPECL, LVDS and HCSL output format
- 2.25V to 3.63V supply voltage
- -40° to $+85^{\circ}\text{C}$ operating temperature range
- Industry standard 6-pin 5.0 x 3.2 mm package
- Short production lead time
- Four programmable output drive strength
- Up to two output frequencies with Frequency Select (FS) input
- 50% lower-power consumption than competition:
30 mA–50 mA (typ)

Target Applications

- 10/100G ethernet
- SONET/SDH
- PCIe gen 1/2/3/4
- Data center/high-performance computing
- HD video broadcasting/processing

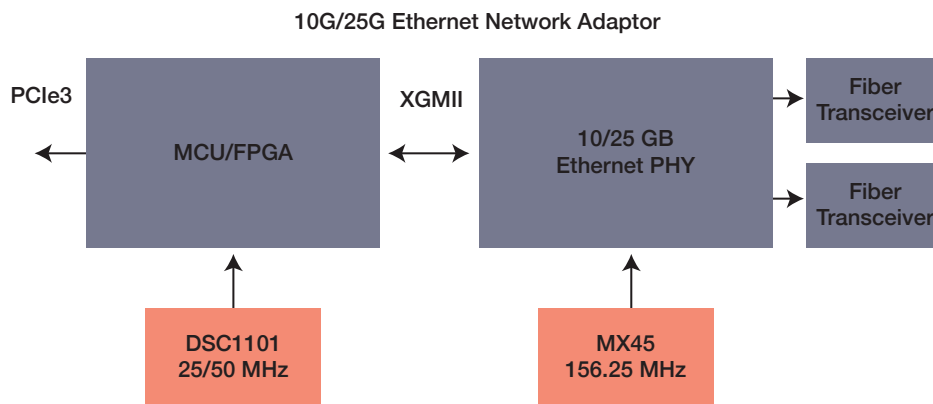

Phase Noise Plot

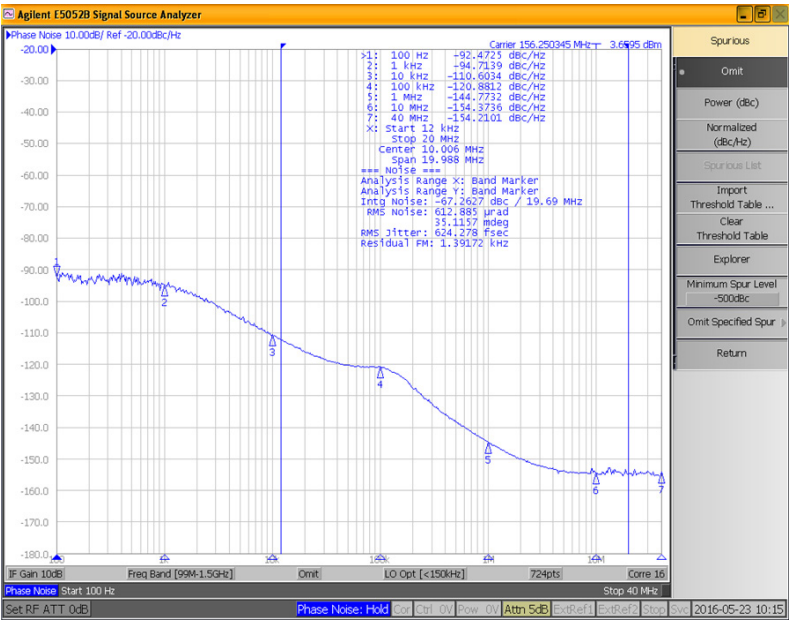

156.25 MHz LVPECL output Phase Noise: 624 fs (12 kHz–20 MHz)

Configure and Sample

With ClockWorks® Configurator online tool, you can customize the MX45/46 instantly and receive datasheets and samples within a few days. Go to www.clockworks.microchip.com/timing and order samples now.



Product Variants

Product	Output Frequency (MHz)	Output Logic	Input Function	Frequency Stability (ppm)	Temperature Range (°C)	Supply Voltage (V)	Phase Noise (ps RMS)	Package (mm)
MX45	2.5–450	LVC MOS, LVPECL, LVDS, HCSL	OE/STDBY/FS on pin 1	±20/25/50	–40 to +85	2.25–3.63	0.7	5.0 x 3.2
MX46	2.5–450	LVC MOS, LVPECL, LVDS, HCSL	OE/STDBY/FS on pin 2	±20/25/50	–40 to +85	2.25–3.63	0.7	5.0 x 3.2

To order samples and create an orderable part number, go to www.clockworks.microchip.com/timing.

The Microchip name and logo, the Microchip logo and Clockworks are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies. © 2017, Microchip Technology Incorporated. All Rights Reserved. 8/17 DS00002525A

