

2703981

https://www.phoenixcontact.com/us/products/2703981

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline, Bus coupler, Modbus/TCP (UDP), RJ45 jack, Digital inputs: 8, 24 V DC, connection technology: 3-conductor, Digital outputs: 4, 24 V DC, 500 mA, connection technology: 3-conductor, transmission speed in the local bus: 500 kbps / 2 Mbps, degree of protection: IP20, including Inline connectors and marking fields

Product description

The bus coupler with integrated I/Os is intended for use within a Modbus/TCP (UDP) network and represents the link to the Inline I/O system. Up to 61 Inline devices can be connected to the bus coupler. The bus coupler supports a maximum of 16 PCP devices.

Your advantages

- · 2 Ethernet ports (with integrated switch)
- · Auto negotiation
- Autocrossing
- Transmission speed of 10 Mbps and 100 Mbps
- Automatic detection of the transmission speed in the local bus (500 kbps or 2 Mbps)
- 8 digital inputs, 4 digital outputs (on-board)
- · Data exchange via OPC server supported
- Software interface for access via TCP/IP: Device Driver Interface (DDI)
- · Web-based management

Commercial data

Item number	2703981
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR01
Product key	DRI11B
GTIN	4046356041157
Weight per piece (including packing)	331.3 g
Weight per piece (excluding packing)	341.14 g
Customs tariff number	85176200
Country of origin	DE



2703981

https://www.phoenixcontact.com/us/products/2703981

Technical data

Dimensions

Dimensional drawing	90 71,5
Width	80 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

Notes

Note on application

Note on application	Only for industrial use
Utilization restriction	
CCCex note	Use in potentially explosive areas is not permitted in China.

Interfaces

Modbus/TCP (UDP)

Number of interfaces	2
Connection method	RJ45 jack
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	10/100 Mbps
Transmission physics	Ethernet in RJ45 twisted pair

Inline local bus

Number of interfaces	1
Connection method	Inline data jumper
Transmission speed	500 kbps / 2 Mbps (automatic detection, no combined system)

System properties

System limits

Number of supported devices	max. 63 (per station)
Number of local bus devices that can be connected	max. 61 (The on-board I/Os are two devices)
Number of devices with parameter channel	max. 16
Number of supported branch terminals with remote bus branch	0

Module	
ID code (hex)	none



2703981

https://www.phoenixcontact.com/us/products/2703981

Input address area	8 bit
Output address area	4 bit
Register length	16 bit

Input data

Digital:

0	
Input name	Digital inputs
Description of the input	EN 61131-2 type 1
Number of inputs	8
Connection method	Inline connector
Connection technology	3-conductor
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC 5 V DC
Input voltage range "1" signal	15 V DC 30 V DC
Nominal input voltage U _{IN}	24 V DC
Nominal input current at U _{IN}	typ. 3 mA
Typical input current per channel	typ. 3 mA
Typical response time	арргох. 500 µs
Delay at signal change from 0 to 1	1.2 ms
Delay at signal change from 1 to 0	1.2 ms

Output data

Digital:

Output name	Digital outputs
Connection method	Inline connector
Connection technology	3-conductor
Number of outputs	4
Protective circuit	Short-circuit and overload protection; Freewheeling circuit in the output driver
Output voltage	24 V DC -1 V (At nominal current)
Maximum output current per module	max. 2 A
Nominal output voltage	24 V DC
Output current when switched off	max. 10 μ A (When not loaded, a voltage can be measured even at an output that is not set.)
Nominal load, inductive	12 VA (1.2 H, 48 Ω)
Nominal load, lamp	12 W
Nominal load, ohmic	12 W
Reverse voltage resistance to short pulses	Reverse voltage proof
Behavior with overload	Auto restart
Behavior with inductive overload	Output can be destroyed
Behavior at voltage switch-off	The output follows the power supply without delay
Signal delay	typ. 1.2 ms
Overcurrent shut-down	min. 0.7 A



2703981

https://www.phoenixcontact.com/us/products/2703981

Product properties

Product type	I/O component
Product family	Inline
Туре	modular
Mounting position	any
Scope of supply	including Inline connectors and marking fields
No. of channels	12
Diagnostics messages	Short-circuit or overload of the digital outputs yes
	Sensor supply failure yes
	Failure of the actuator supply yes
Insulation characteristics	
Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)
ectrical properties	
Maximum power dissipation for nominal condition	6.3 W
Potentials	
Protective circuit	
	Surge protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC
Protective circuit	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus
Protective circuit	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC
Protective circuit	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector)
Protective circuit Potentials: Bus coupler supply U_{BK} ; Communications power U_{L} coupler supply. Supply voltage	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple)
Protective circuit Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple)
Protective circuit Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L)	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks) min. 80 mA (without connected I/O terminal blocks)
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA})	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks) 7.5 V DC
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA}) Supply voltage	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks) 7.5 V DC 24 V DC
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA})	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks) 7.5 V DC 24 V DC
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA}) Supply voltage	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks) 7.5 V DC 24 V DC
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA}) Supply voltage Supply voltage Supply voltage range	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks) 7.5 V DC 24 V DC
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA}) Supply voltage Supply voltage Supply voltage range	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks) 7.5 V DC 24 V DC 19.2 V DC 30 V DC (including all tolerances, including ripple)
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA}) Supply voltage Supply voltage Supply voltage Supply voltage range Potentials: Main circuit supply (U _M) Supply voltage	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks) 7.5 V DC 24 V DC 19.2 V DC 30 V DC (including all tolerances, including ripple)
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA}) Supply voltage Supply voltage Supply voltage range Potentials: Main circuit supply (U _M) Supply voltage Supply voltage Supply voltage Supply voltage Supply voltage Supply voltage	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks min. 80 mA (without connected I/O terminal blocks) 7.5 V DC 24 V DC 19.2 V DC 30 V DC (including all tolerances, including ripple) 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple)
Protective circuit Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA}) Supply voltage Supply voltage range Potentials: Main circuit supply (U _M) Supply voltage Supply voltage Supply voltage Current draw	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks min. 80 mA (without connected I/O terminal blocks) 7.5 V DC 24 V DC 19.2 V DC 30 V DC (including all tolerances, including ripple) 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 8 A DC
Potentials: Bus coupler supply U _{BK} ; Communications power U _L coupler supply. Supply voltage Supply voltage range Current draw Potentials: Communications power (U _L) Supply voltage Potentials: Supply of analog modules (U _{ANA}) Supply voltage Supply voltage Supply voltage range Potentials: Main circuit supply (U _M) Supply voltage Supply voltage Supply voltage Supply voltage Supply voltage Supply voltage	supply); Suppressor diode, 35 V DC Reverse polarity protection (segment supply, main supply, bus coupler supply); Suppressor diode, 35 V DC (7.5 V) and the analog supply U _{ANA} (24 V) are generated from the bus 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 0.98 A (with max. number of connected I/O terminal blocks min. 80 mA (without connected I/O terminal blocks) 7.5 V DC 24 V DC 19.2 V DC 30 V DC (including all tolerances, including ripple) 24 V DC (via Inline connector) 19.2 V DC 30 V DC (including all tolerances, including ripple) max. 8 A DC



2703981

https://www.phoenixcontact.com/us/products/2703981

Current draw	max. 8 A DC
	min. 3 mA (without connected peripherals)
Electrical isolation/isolation of the voltage ranges	
Test voltage: Ethernet interface 1 / Ethernet interface 2	500 V AC, 50 Hz, 1 min
Test voltage: Ethernet interface 1 / logic (U _{BK} , U _L , U _{ANA})	500 V AC, 50 Hz, 1 min
Test voltage: Ethernet interface 1 / I/O ($\mathrm{U_{M}},\mathrm{U_{S}}$)	500 V AC, 50 Hz, 1 min
Test voltage: Ethernet interface 1 / functional ground	500 V AC, 50 Hz, 1 min
Test voltage: Ethernet interface 2 / logic (U _{BK} , U _L , U _{ANA})	500 V AC, 50 Hz, 1 min
Test voltage: Ethernet interface 2 / I/O ($\mathrm{U_{M}},\mathrm{U_{S}}$)	500 V AC, 50 Hz, 1 min
Test voltage: Ethernet interface 2 / functional ground	500 V AC, 50 Hz, 1 min
Test voltage: Communications power (U $_{\rm BK},$ U $_{\rm L},$ U $_{\rm ANA})$ / I/O (U $_{\rm M},$ U $_{\rm S})$	500 V AC, 50 Hz, 1 min
Test voltage: Communications power ($\mathbf{U}_{\mathrm{BK}},\mathbf{U}_{\mathrm{L}},\mathbf{U}_{\mathrm{ANA}}$) / functional ground	500 V AC, 50 Hz, 1 min
Test voltage: I/O (U_M , U_S) / functional ground	500 V AC, 50 Hz, 1 min

Connection data

Connection technology

Connection name	Inline connector
Conductor connection	
Connection method	Spring-cage connection
Conductor cross section rigid	0.08 mm ² 1.5 mm ²
Conductor cross section flexible	0.08 mm ² 1.5 mm ²
Conductor cross section AWG	28 16
Stripping length	8 mm
Inline connector	

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² 1.5 mm ²
Conductor cross section, flexible	0.08 mm² 1.5 mm²
Conductor cross section AWG	28 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C 55 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-40 °C 85 °C
Permissible humidity (operation)	10 % 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % 95 % (non-condensing)



2703981

https://www.phoenixcontact.com/us/products/2703981

Standards and regulations

	Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
Мс	punting	
	Mounting type	DIN rail mounting
	Mounting position	any





2703981

https://www.phoenixcontact.com/us/products/2703981

Drawings

Dimensional drawing

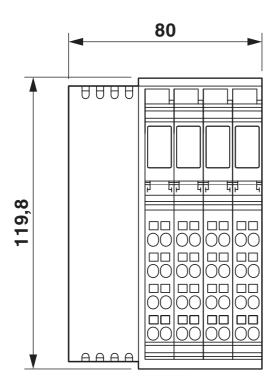

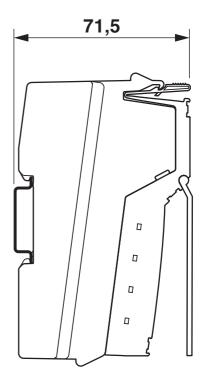




2703981

https://www.phoenixcontact.com/us/products/2703981

Dimensional drawing

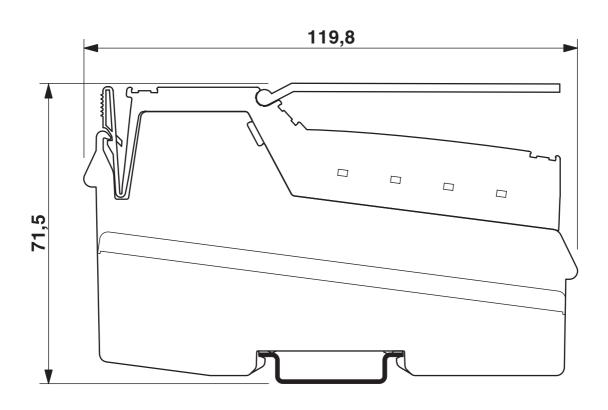

PWRDO4DI4 DI4 1 2 3 4 IN6 (Us) 24 V DC (Us) 24 V DC (Us) 24 V DC (Us) MODBUS/TCP(UDP) (UM)



2703981

https://www.phoenixcontact.com/us/products/2703981

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2703981



EAC

Approval ID: TR TS_S_03508-21



BV

Approval ID: 20977/C1 BV



RINA

Approval ID: ELE121121XG



Approval ID: TAA00002CU



cULus Recognized





вν

Approval ID: 21725/C1 BV



cULus Listed

Approval ID: E199827



2703981

https://www.phoenixcontact.com/us/products/2703981

Classifications

_	\sim	$\Lambda \cap \cap$
		A. 7. 7

	ECLASS-13.0	27242608
E	ГІМ	
	ETIM 9.0	EC001604
UNSPSC		
	UNSPSC 21.0	32151600



2703981

https://www.phoenixcontact.com/us/products/2703981

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-l
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	2fb1615a-a168-44ad-947e-20c70d64c7a5
EF3.0 Climate Change	
CO2e kg	10.21 kg CO2e

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com