

# Plastic Medium-Power Silicon PNP Darlington

**BD676G, BD676AG,  
BD678G, BD678AG,  
BD680G, BD680AG,  
BD682G, BD682TG**

This series of plastic, medium-power silicon PNP Darlington transistors can be used as output devices in complementary general-purpose amplifier applications.

## Features

- High DC Current Gain
- Monolithic Construction
- BD676, 676A, 678, 678A, 680, 680A, 682 are complementary with BD675, 675A, 677, 677A, 679, 679A, 681
- BD678, 678A, 680, 680A are equivalent to MJE 700, 701, 702, 703
- These Devices are Pb-Free and are RoHS Compliant\*

## MAXIMUM RATINGS

| Rating                                                                                                | Symbol         | Value                 | Unit                     |
|-------------------------------------------------------------------------------------------------------|----------------|-----------------------|--------------------------|
| Collector-Emitter Voltage<br>BD676G, BD676AG<br>BD678G, BD678AG<br>BD680G, BD680AG<br>BD682G, BD682TG | $V_{CEO}$      | 45<br>60<br>80<br>100 | Vdc                      |
| Collector-Base Voltage<br>BD676G, BD676AG<br>BD678G, BD678AG<br>BD680G, BD680AG<br>BD682G, BD682TG    | $V_{CB}$       | 45<br>60<br>80<br>100 | Vdc                      |
| Emitter-Base Voltage                                                                                  | $V_{EB}$       | 5.0                   | Vdc                      |
| Collector Current                                                                                     | $I_C$          | 4.0                   | Adc                      |
| Base Current                                                                                          | $I_B$          | 0.1                   | Adc                      |
| Total Device Dissipation<br>@ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$             | $P_D$          | 40<br>0.32            | W<br>W/ $^\circ\text{C}$ |
| Operating and Storage Junction Temperature Range                                                      | $T_J, T_{stg}$ | -55 to +150           | $^\circ\text{C}$         |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



## THERMAL CHARACTERISTICS

| Characteristic                       | Symbol          | Max  | Unit                      |
|--------------------------------------|-----------------|------|---------------------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 3.13 | $^\circ\text{C}/\text{W}$ |

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, [SOLDERRM/D](#).


## 4.0 AMP DARLINGTON POWER TRANSISTORS PNP SILICON

45, 60, 80, 100 VOLT, 40 WATT



TO-225  
CASE 77-09  
STYLE 1

## MARKING DIAGRAMS



Y = Year  
WW = Work Week  
BD6xx = Device Code  
xx = 76, 78, 80, 82, or 82T  
G = Pb-Free Package

## ORDERING INFORMATION

See detailed ordering and shipping information on page 3 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 3.

# BD676G, BD676AG, BD678G, BD678AG, BD680G, BD680AG, BD682G, BD682TG

## ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic                                                                                                                                                                                                     | Symbol        | Min                   | Max              | Unit            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|------------------|-----------------|
| <b>OFF CHARACTERISTICS</b>                                                                                                                                                                                         |               |                       |                  |                 |
| Collector-Emitter Breakdown Voltage (Note 1)<br>( $I_C = 50\text{ mAdc}$ , $I_B = 0$ )<br>BD676G, BD676AG<br>BD678G, BD678AG<br>BD680G, BD680AG<br>BD682G, BD682TG                                                 | $BV_{CEO}$    | 45<br>60<br>80<br>100 | –<br>–<br>–<br>– | Vdc             |
| Collector Cutoff Current<br>( $V_{CE} = \text{Half Rated } BV_{CEO}$ , $I_B = 0$ )                                                                                                                                 | $I_{CEO}$     | –                     | 500              | $\mu\text{Adc}$ |
| Collector Cutoff Current<br>( $V_{CB} = \text{Rated } BV_{CEO}$ , $I_E = 0$ )<br>( $V_{CB} = \text{Rated } BV_{CEO}$ , $I_E = 0$ , $T_C = 100^\circ\text{C}$ )                                                     | $I_{CBO}$     | –<br>–                | 0.2<br>2.0       | mAdc            |
| Emitter Cutoff Current<br>( $V_{BE} = 5.0\text{ Vdc}$ , $I_C = 0$ )                                                                                                                                                | $I_{EBO}$     | –                     | 2.0              | mAdc            |
| <b>ON CHARACTERISTICS</b>                                                                                                                                                                                          |               |                       |                  |                 |
| DC Current Gain (Note 1)<br>( $I_C = 1.5\text{ Adc}$ , $V_{CE} = 3.0\text{ Vdc}$ )<br>BD676G, BD678G, BD680G, BD682G<br>( $I_C = 2.0\text{ Adc}$ , $V_{CE} = 3.0\text{ Vdc}$ )<br>BD676AG, BD678AG, BD680AG        | $h_{FE}$      | 750<br>750            | –<br>–           | –               |
| Collector-Emitter Saturation Voltage (Note 1)<br>( $I_C = 1.5\text{ Adc}$ , $I_B = 30\text{ mAdc}$ )<br>BD678G, BD680G, BD682G<br>( $I_C = 2.0\text{ Adc}$ , $I_B = 40\text{ mAdc}$ )<br>BD676AG, BD678AG, BD680AG | $V_{CE(sat)}$ | –<br>–                | 2.5<br>2.8       | Vdc             |
| Base-Emitter On Voltage (Note 1)<br>( $I_C = 1.5\text{ Adc}$ , $V_{CE} = 3.0\text{ Vdc}$ )<br>BD678G, BD680G, BD682G<br>( $I_C = 2.0\text{ Adc}$ , $V_{CE} = 3.0\text{ Vdc}$ )<br>BD676AG, BD678AG, BD680AG        | $V_{BE(on)}$  | –<br>–                | 2.5<br>2.5       | Vdc             |
| <b>DYNAMIC CHARACTERISTICS</b>                                                                                                                                                                                     |               |                       |                  |                 |
| Small-Signal Current Gain<br>( $I_C = 1.5\text{ Adc}$ , $V_{CE} = 3.0\text{ Vdc}$ , $f = 1.0\text{ MHz}$ )                                                                                                         | $h_{fe}$      | 1.0                   | –                | –               |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. Pulse Test: Pulse Width  $\leq 300\text{ }\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

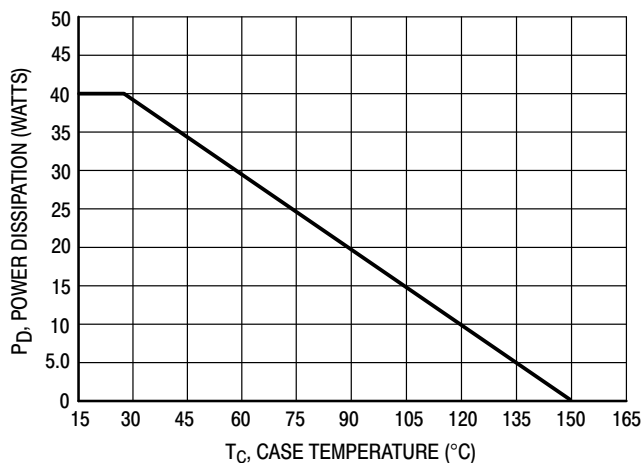


Figure 1. Power Temperature Derating

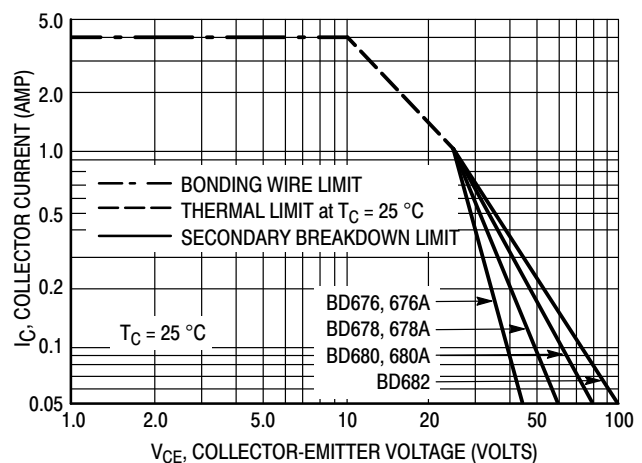


Figure 2. DC Safe Operating Area

## BD676G, BD676AG, BD678G, BD678AG, BD680G, BD680AG, BD682G, BD682TG

There are two limitations on the power handling ability of a transistor average junction temperature and secondary breakdown. Safe operating area curves indicate  $I_C - V_{CE}$  limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

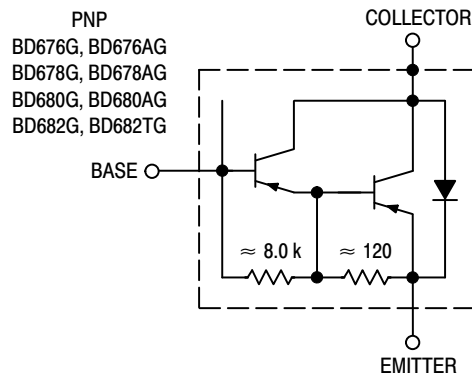


Figure 3. Darlington Circuit Schematic


### ORDERING INFORMATION

| Device | Package             | Shipping        |
|--------|---------------------|-----------------|
| BD682G | TO-225<br>(Pb-Free) | 500 Units / Box |

### DISCONTINUED (Note 2)


|         |                     |                 |
|---------|---------------------|-----------------|
| BD676G  | TO-225<br>(Pb-Free) | 500 Units / Box |
| BD676AG | TO-225<br>(Pb-Free) | 500 Units / Box |
| BD678G  | TO-225<br>(Pb-Free) | 500 Units / Box |
| BD678AG | TO-225<br>(Pb-Free) | 500 Units / Box |
| BD680G  | TO-225<br>(Pb-Free) | 500 Units / Box |
| BD680AG | TO-225<br>(Pb-Free) | 500 Units / Box |
| BD682TG | TO-225<br>(Pb-Free) | 50 Units / Rail |

2. **DISCONTINUED:** These devices are not recommended for new design. Please contact your **onsemi** representative for information. The most current information on these devices may be available on [www.onsemi.com](http://www.onsemi.com).

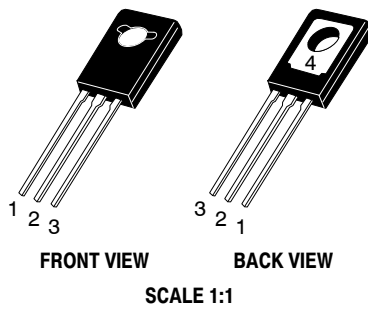

TO-225  
CASE 77-09  
ISSUE AD

DATE 25 MAR 2015

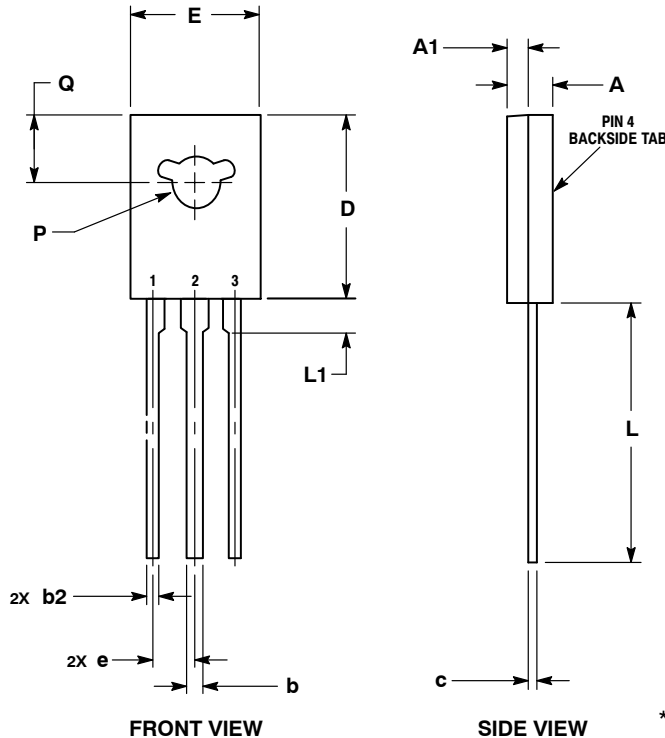


NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. NUMBER AND SHAPE OF LUGS OPTIONAL.

| MILLIMETERS |       |       |
|-------------|-------|-------|
| DIM         | MIN   | MAX   |
| A           | 2.40  | 3.00  |
| A1          | 1.00  | 1.50  |
| b           | 0.60  | 0.90  |
| b2          | 0.51  | 0.88  |
| c           | 0.39  | 0.63  |
| D           | 10.60 | 11.10 |
| E           | 7.40  | 7.80  |
| e           | 2.04  | 2.54  |
| L           | 14.50 | 16.63 |
| L1          | 1.27  | 2.54  |
| P           | 2.90  | 3.30  |
| Q           | 3.80  | 4.20  |

GENERIC  
MARKING DIAGRAM\*



Y = Year  
WW = Work Week  
XXXXX = Device Code  
G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

|                                                           |                                                       |                                                           |                                                         |                                                       |
|-----------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------|
| STYLE 1:<br>PIN 1. EMITTER<br>2., 4. COLLECTOR<br>3. BASE | STYLE 2:<br>PIN 1. CATHODE<br>2., 4. ANODE<br>3. GATE | STYLE 3:<br>PIN 1. BASE<br>2., 4. COLLECTOR<br>3. EMITTER | STYLE 4:<br>PIN 1. ANODE 1<br>2., 4. ANODE 2<br>3. GATE | STYLE 5:<br>PIN 1. MT 1<br>2., 4. MT 2<br>3. GATE     |
| STYLE 6:<br>PIN 1. CATHODE<br>2., 4. GATE<br>3. ANODE     | STYLE 7:<br>PIN 1. MT 1<br>2., 4. GATE<br>3. MT 2     | STYLE 8:<br>PIN 1. SOURCE<br>2., 4. GATE<br>3. DRAIN      | STYLE 9:<br>PIN 1. GATE<br>2., 4. DRAIN<br>3. SOURCE    | STYLE 10:<br>PIN 1. SOURCE<br>2., 4. DRAIN<br>3. GATE |

|                  |             |                                                                                                                                                                                     |
|------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42049B | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | TO-225      | PAGE 1 OF 1                                                                                                                                                                         |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

