Powered-off Protection, 6 Ω, 1.8 V to 5.5 V, SPDT Analog Switch (2:1 Multiplexer)

DESCRIPTION

The DG9411E is a high performance single-pole, double-throw (SPDT) analog switch designed for 1.8 V to 5.5 V operation with a single power rail.

Fabricated with high density CMOS technology, the device achieves low on resistance of 6 Ω and switch off capacitance of 7 pF at a 5 V power supply and low power consumption, and fast switching speeds.

The DG9411E can handle both analog and digital signals and permits signals with amplitudes of up to V+ to be transmitted in either direction. Its control logic inputs can go over V+ up to 5.5 V. It features break before make switching performance.

A powered-off protection circuit is built into the switch to prevent an abnormal current flow from COM pin to V+ during the power-down condition. Each output pin can withstand greater than 7 kV (human body model).

Operation temperature is specified from -40 °C to +85 °C. The DG9411E is available in the compact SC-70-6L package.

FEATURES

Pb-free Available

RoHS* Available

- Low switch on-resistance (6 Ω)
- 1.8 V to 5.5 V single supply operation
- Powered-off protection
- Control logic inputs can go over V+ up to 5.5 V
- Low parasitic capacitance, 7 pF at switch off
- Low charge injection, 1 pC
- Break before make switching
- Latch-up performance exceeds 200 mA per JESD 78
- ESD tested
  - 7000 V human body model (JS-001)
  - 1000 V charge device model (JS-002)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Note


* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details

APPLICATIONS

- Battery powered devices
- Smartphones and tablets
- Consumer and computing
- Portable instrumentation
- Medical equipment

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

SC-70

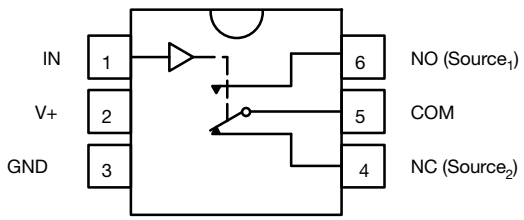

Top view

Device marking

● H7

TRUTH TABLE		
LOGIC	NC	NO
0	On	Off
1	Off	On

Notes

- Logic “0” ≤ 0.8 V
- Logic “1” ≥ 2.4 V

ORDERING INFORMATION		
TEMP. RANGE	PACKAGE	PART NUMBER
-40 °C to +85 °C	SC-70-6	DG9411EDL-T1-GE3

For technical questions, contact: analogswitchtechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

ABSOLUTE MAXIMUM RATINGS

PARAMETER		LIMIT	UNIT
V+, COM, NC, NO, IN reference to GND		-0.3 to 6	V
Continuous current (any terminal)		± 50	mA
Peak current (pulsed at 1 ms, 10 % duty cycle)		± 200	
Storage temperature		-65 to +150	°C
Power dissipation (packages) [a]	6-pin SC-70 [b]	250	mW
ESD / HBM	JS-001	7000	V
ESD / CDM	JS-002	1000	
Latch up	Per JESD78 with 1.5 x voltage clamp	200	mA

Notes
a. All leads welded or soldered to PC board
b. Derate 3.1 mW/°C above 70 °C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

SPECIFICATIONS (V+ = 5 V)

PARAMETER	SYMBOL	TEST CONDITIONS UNLESS OTHERWISE SPECIFIED V+ = 5 V, ± 10 % V_{IN} = 0.8 V or 2.4 V [e]	TEMP.[a]	LIMITS -40 °C to +85 °C MIN. [b]	TYP. [c]	MAX. [b]	UNIT
Analog Switch							
Analog signal range [d]	V_{NO}, V_{NC} V_{COM}		Full	0	-	V+	V
Drain-source on-resistance [d]	$R_{DS(on)}$	V+ = 4.5 V, V_{COM} = 3 V, I_{NO}, I_{NC} = 10 mA	Room	-	6	9	Ω
			Full	-	8	11	
$R_{DS(on)}$ flatness [d]	$R_{DS(on)}$ flatness	V+ = 5 V, V_{COM} = 1.5 V, 3.5 V, I_{NO}, I_{NC} = 10 mA	Room	-	0.4	-	
$R_{DS(on)}$ match [d]	$\Delta R_{DS(on)}$	V+ = 4.5 V, V_{COM} = 3 V, I_{NO}, I_{NC} = 10 mA	Room	-	0.04	0.2	
Switch-off leakage current [f]	$I_{NO(off)}$, $I_{NC(off)}$	V+ = 5.5 V, V_{NO}, V_{NC} = 1 V / 4.5 V, V_{COM} = 4.5 V / 1 V	Room	-1.5	-	1.5	nA
			Full	-4	-	4	
	$I_{COM(off)}$		Room	-1	-	1	
			Full	-4	-	4	
Channel-on leakage current [f]	$I_{COM(on)}$	V+ = 5.5 V, V_{NO}, V_{NC} = V_{COM} = 1 V / 4.5 V	Room	-1	-	1	
			Full	-4	-	4	
Power-down leakage	I_{PD}	V+ = 0 V, V_{COM} = 5 V, NO/NC open, V_{IN} = GND	Full	-	-	2	µA
		V+ = 0 V, V_{NO}, V_{NC} = 5 V, COM open, V_{IN} = GND	Full	-	-	2	
Digital Control							
Input high voltage	V_{INH}		Full	2.4	-	-	V
Input low voltage	V_{INL}		Full	-	-	0.8	
Input capacitance [d]	C_{IN}		Full	-	6	-	pF
Input current	I_{INL} or I_{INH}	V_{IN} = 0 V or V+	Full	-1	-	1	µA
Dynamic Characteristics							
Turn-on time [d]	t_{ON}	V_{NO} or V_{NC} = 3 V, R_L = 300 Ω, C_L = 35 pF	Room	-	10	30	ns
			Full	-	-	32	
Turn-off time [d]	t_{OFF}		Room	-	8	24	
			Full	-	-	26	
Break-before-make time [d]	t_{BBM}		Room	1	-	-	
Charge injection [d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, V_{NO}, V_{NC} = 0 V, R_{GEN} = 0 Ω	Room	-	1	-	pC
Off-isolation [d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room	-	-78	-	dB
Crosstalk [d]	X_{TALK}		Room	-	-77	-	
NO, NC off capacitance [d]	$C_{NO(off)}$	V_{IN} = 0 V or V+, f = 1 MHz	Room	-	7	-	pF
	$C_{NC(off)}$		Room	-	7	-	
Channel-on capacitance [d]	C_{ON}		Room	-	13	-	
Power Supply							
Power supply current [d]	I+	V_{IN} = 0 V or V+	Full	-	0.004	1	µA

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

SPECIFICATIONS (V+ = 3 V)							
PARAMETER	**SYMBOL**	**TEST CONDITIONS UNLESS OTHERWISE SPECIFIED** V+ = 3 V, ± 10 % V_{IN} = 0.4 V or 2 V [e]	**TEMP.[a]**	**LIMITS** -40 °C to +85 °C			**UNIT**
				MIN. [b]	**TYP. [c]**	**MAX. [b]**	
Analog Switch							
Analog signal range [d]	V_{NO}, V_{NC} V_{COM}		Full	0	-	V+	V
Drain-source on-resistance [d]	$R_{DS(on)}$	V+ = 2.7 V, V_{COM} = 1.5 V, I_{NO}, I_{NC} = 10 mA	Room	-	13	22	Ω
			Full	-	15	24	
$R_{DS(on)}$ flatness [d]	$R_{DS(on)}$ flatness	V+ = 3 V, V_{COM} = 0 V to V+, I_{NO}, I_{NC} = 10 mA	Room	-	1.4	-	
$R_{DS(on)}$ match [d]	$\Delta R_{DS(on)}$	V+ = 2.7 V, V_{COM} = 1.5 V, I_{NO}, I_{NC} = 10 mA	Room	-	0.03	0.35	
Switch-off leakage current [f]	$I_{NO(off)}$, $I_{NC(off)}$	V+ = 3.3 V, V_{NO}, V_{NC} = 1 V / 3 V, V_{COM} = 3 V / 1 V	Room	-400	-	400	pA
			Full	-4	-	4	nA
	$I_{COM(off)}$		Room	-800	-	800	pA
			Full	-8	-	8	nA
Channel-on leakage current [f]	$I_{COM(on)}$	V+ = 3.3 V, V_{NO}, V_{NC} = V_{COM} = 1 V / 3 V	Room	-800	-	800	pA
			Full	-8	-	8	nA
Digital Control							
Input high voltage	V_{INH}		Full	2	-	-	V
Input low voltage	V_{INL}		Full	-	-	0.4	
Input capacitance [d]	C_{IN}		Full	-	6	-	pF
Input current	I_{INL} or I_{INH}	V_{IN} = 0 V or V+	Full	-1	-	1	µA
Dynamic Characteristics							
Turn-on time [d]	t_{ON}	V_{NO} or V_{NC} = 2 V, R_L = 300 Ω, C_L = 35 pF	Room	-	13	34	ns
			Full	-	-	37	
Turn-off time [d]	t_{OFF}		Room	-	9	20	
			Full	-	-	22	
Break-before-make time [d]	t_{BBM}		Room	1	-	-	
Charge injection [d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, V_{NO}, V_{NC} = 0 V, R_{GEN} = 0 Ω	Room	-	0.9	-	pC
Off-isolation [d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room	-	-78	-	dB
Crosstalk [d]	X_{TALK}		Room	-	-77	-	
NO, NC off capacitance [d]	$C_{NO(off)}$	V_{IN} = 0 V or V+, f = 1 MHz	Room	-	7	-	pF
	$C_{NC(off)}$		Room	-	7	-	
Channel-on capacitance [d]	C_{ON}		Room	-	14	-	
Power Supply							
Power supply current [d]	I+	V_{IN} = 0 V or V+	Full	-	0.002	1	µA

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

SPECIFICATIONS (V+ = 2.5 V)							
PARAMETER	**SYMBOL**	**TEST CONDITIONS UNLESS OTHERWISE SPECIFIED** V+ = 2.5 V, ± 10 % V_{IN} = 0.4 V or 2 V [e]	**TEMP.** [a]	**LIMITS** -40 °C to +85 °C			**UNIT**
				MIN. [b]	**TYP.** [c]	**MAX.** [b]	
Analog Switch							
Analog signal range [d]	V_{NO}, V_{NC} V_{COM}		Full	0	-	V+	V
Drain-source on-resistance [d]	$R_{DS(on)}$	V+ = 2.2 V, V_{COM} = 1 V, I_{NO}, I_{NC} = 10 mA	Room	-	23	29.5	Ω
			Full [d]	-	24	30.5	
$R_{DS(on)}$ flatness [d]	$R_{DS(on)}$ flatness	V+ = 2.5 V, V_{COM} = 0 V to V+, I_{NO}, I_{NC} = 10 mA	Room	-	1.7	-	
$R_{DS(on)}$ match [d]	$\Delta R_{DS(on)}$	V+ = 2.2 V, V_{COM} = 1.2 V, I_{NO}, I_{NC} = 10 mA	Room	-	0.1	0.5	
Switch-off leakage current [f]	$I_{NO(off)}$, $I_{NC(off)}$	V+ = 2.7 V, V_{NO}, V_{NC} = 0.5 V / 1.5 V, V_{COM} = 1.5 V / 0.5 V	Room	-200	-	200	pA
			Full [d]	-3	-	3	nA
	$I_{COM(off)}$		Room	-200	-	200	pA
			Full [d]	-3	-	3	nA
Channel-on leakage current [f]	$I_{COM(on)}$	V+ = 2.7 V, V_{NO}, V_{NC} = V_{COM} = 0.5 V / 1.5 V	Room	-200	-	200	pA
			Full [d]	-3	-	3	nA
Digital Control							
Input high voltage	V_{INH}		Full	2	-	-	V
Input low voltage	V_{INL}		Full	-	-	0.4	
Input capacitance [d]	C_{IN}		Full	-	6	-	pF
Input current	I_{INL} or I_{INH}	V_{IN} = 0 V or V+	Full	-1	-	1	µA
Dynamic Characteristics							
Turn-on time [d]	t_{ON}	V_{NO} or V_{NC} = 1.5 V, R_L = 300 Ω, C_L = 35 pF	Room	-	16	36	ns
			Full [d]	-	-	38	
Turn-off time [d]	t_{OFF}		Room	-	10	19	
			Full	-	-	21	
Break-before-make time [d]	t_{BBM}		Room [d]	1	-	-	
Charge injection [d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, V_{NO}, V_{NC} = 0 V, R_{GEN} = 0 Ω	Room	-	0.9	-	pC
Off-isolation [d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room	-	-78	-	dB
Crosstalk [d]	X_{TALK}		Room	-	-77	-	
NO, NC off capacitance [d]	$C_{NO(off)}$	V_{IN} = 0 V or V+, f = 1 MHz	Room	-	7	-	pF
	$C_{NC(off)}$		Room	-	7	-	
Channel-on capacitance [d]	C_{ON}		Room	-	14	-	
Power Supply							
Power supply current [d]	I+	V_{IN} = 0 V or V+	Full	-	-	1	µA

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.


SPECIFICATIONS (V+ = 2 V)							
PARAMETER	**SYMBOL**	**TEST CONDITIONS UNLESS OTHERWISE SPECIFIED** V+ = 2 V, ± 10 % V_{IN} = 0.4 V or 1.6 V [e]	**TEMP.**[a]	**LIMITS** -40 °C to +85 °C			**UNIT**
				MIN. [b]	**TYP.** [c]	**MAX.** [b]	
Analog Switch							
Analog signal range [d]	V_{NO}, V_{NC} V_{COM}		Full	0	-	V+	V
Drain-source on-resistance [d]	$R_{DS(on)}$	V+ = 1.8 V, V_{COM} = 1 V, I_{NO}, I_{NC} = 10 mA	Room	-	37	45	Ω
			Full [d]	-	36	47	
$R_{DS(on)}$ flatness [d]	$R_{DS(on)}$ flatness	V+ = 2 V, V_{COM} = 0 V to V+, I_{NO}, I_{NC} = 10 mA	Room	-	3	-	
$R_{DS(on)}$ match [d]	$\Delta R_{DS(on)}$	V+ = 1.8 V, V_{COM} = 1 V, I_{NO}, I_{NC} = 10 mA	Room	-	0.04	0.5	
Switch-off leakage current [f]	$I_{NO(off)}$, $I_{NC(off)}$	V+ = 2.2 V, V_{NO}, V_{NC} = 0.5 V / 1.5 V, V_{COM} = 1.5 V / 0.5 V	Room	-200	-	200	pA
			Full [d]	-3	-	3	nA
	$I_{COM(off)}$		Room	-200	-	200	pA
			Full [d]	-3	-	3	nA
Channel-on leakage current [f]	$I_{COM(on)}$	V+ = 2.2 V, V_{NO}, V_{NC} = V_{COM} = 0.5 V / 1.5 V	Room	-200	-	200	pA
			Full [d]	-3	-	3	nA
Digital Control							
Input high voltage	V_{INH}		Full	1.6	-	-	V
Input low voltage	V_{INL}		Full	-	-	0.4	
Input capacitance [d]	C_{IN}		Full	-	6	-	pF
Input current	I_{INL} or I_{INH}	V_{IN} = 0 V or V+	Full	-1	-	1	µA
Dynamic Characteristics							
Turn-on time [d]	t_{ON}	V_{NO} or V_{NC} = 1.5 V, R_L = 300 Ω, C_L = 35 pF	Room	-	21	40	ns
			Full [d]	-	-	42	
Turn-off time [d]	t_{OFF}		Room	-	13	20	
			Full [d]	-	-	21	
Break-before-make time [d]	t_{BBM}		Room	1	-	-	
Charge injection [d]	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, V_{NO}, V_{NC} = 0 V, R_{GEN} = 0 Ω	Room	-	0.8	-	pC
Off-isolation [d]	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 1 MHz	Room	-	-78	-	dB
Crosstalk [d]	X_{TALK}		Room	-	-77	-	
NO, NC off capacitance [d]	$C_{NO(off)}$	V_{IN} = 0 V or V+, f = 1 MHz	Room	-	7	-	pF
	$C_{NC(off)}$		Room	-	7	-	
Channel-on capacitance [d]	C_{ON}		Room	-	14	-	
Power Supply							
Power supply current [d]	I+	V_{IN} = 0 V or V+	Full	-	-	1	µA

Notes


a. Room = 25 °C, full = as determined by the operating suffix
b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this datasheet
c. Typical values are for design aid only, not guaranteed nor subject to production testing
d. Guarantee by design, nor subjected to production test
e. V_{IN} = input voltage to perform proper function
f. Guaranteed by 5 V leakage testing, not production tested

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

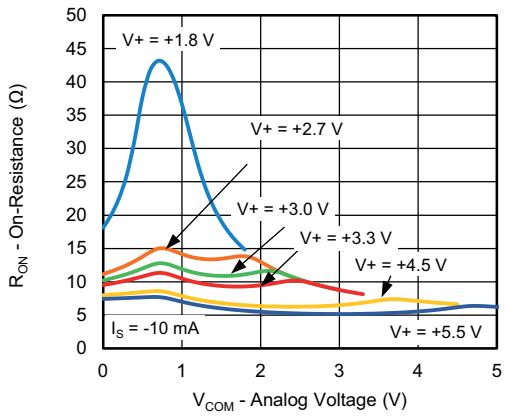


$R_{DS(on)}$ vs. V_{COM} and Supply Voltage

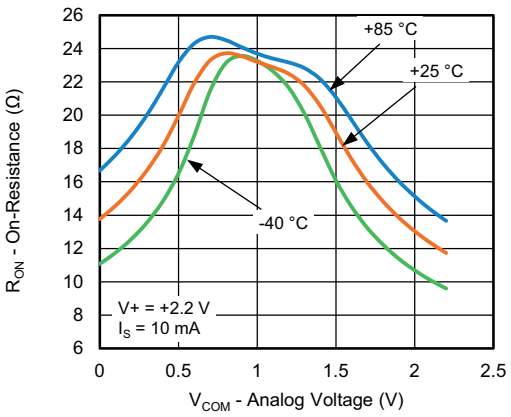


$R_{DS(on)}$ vs. Analog Voltage and Temperature

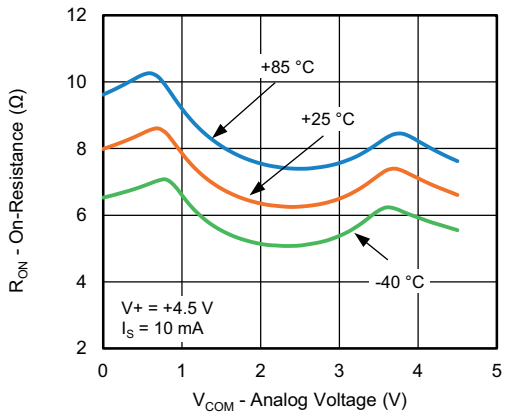


$R_{DS(on)}$ vs. Analog Voltage and Temperature

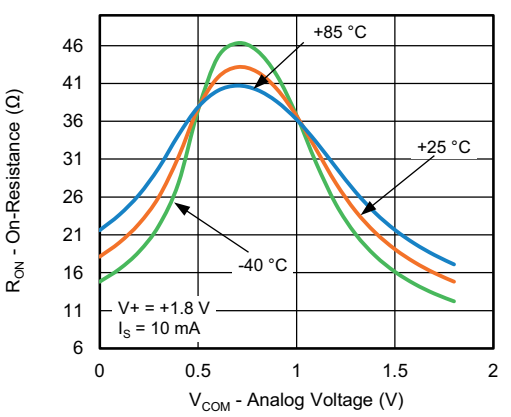

$R_{DS(on)}$ vs. Analog Voltage and Temperature

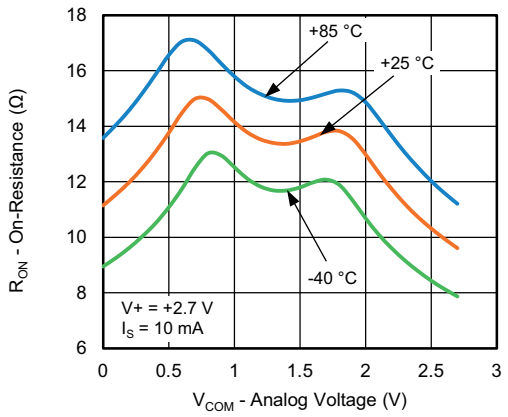

$R_{DS(on)}$ vs. Analog Voltage and Temperature

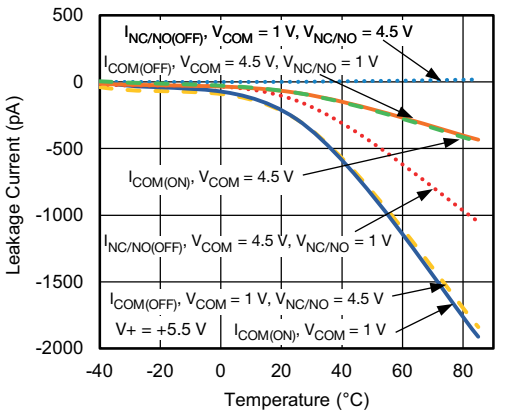


Leakage Current vs. Temperature

For technical questions, contact: analogswitchtechsupport@vishay.com


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

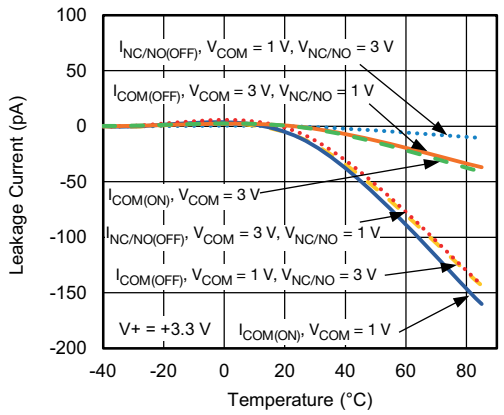


Leakage Current vs. Temperature

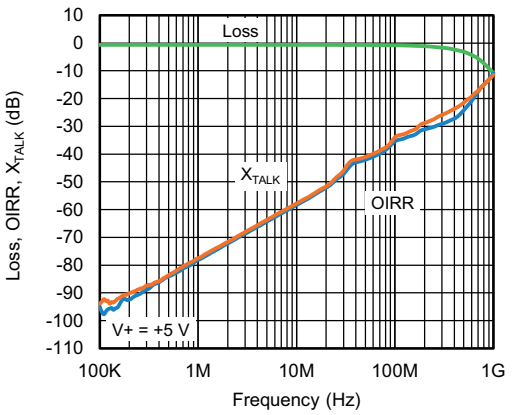


Insertion Loss, Off-Isolation Crosstalk vs. Frequency

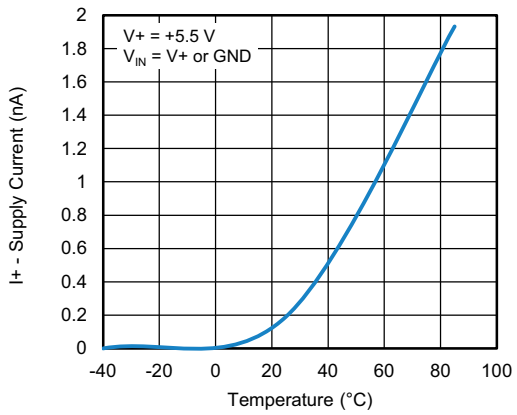


Supply Current vs. Temperature

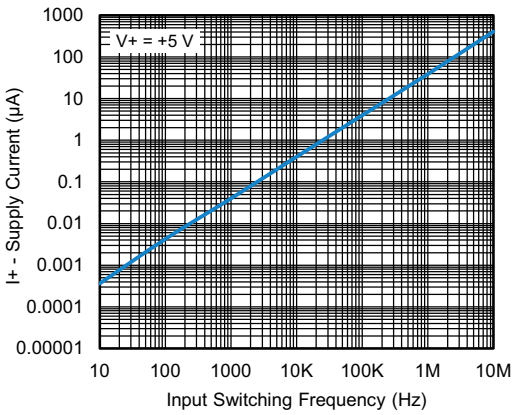

Supply Current vs. Input Switching Frequency

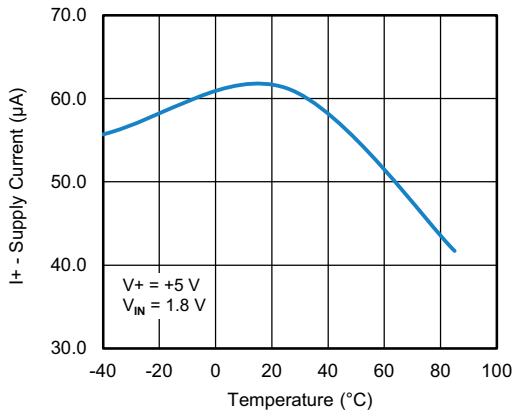


Supply Current vs. Temperature

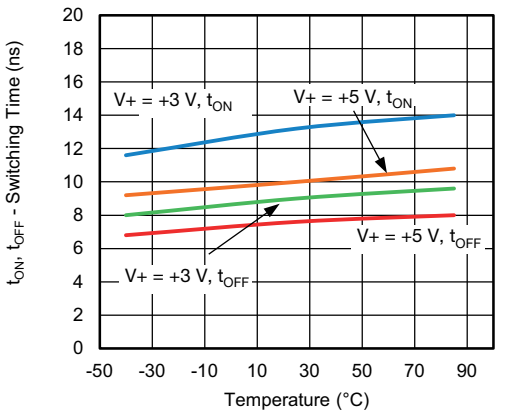


Switching Time vs. Temperature

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

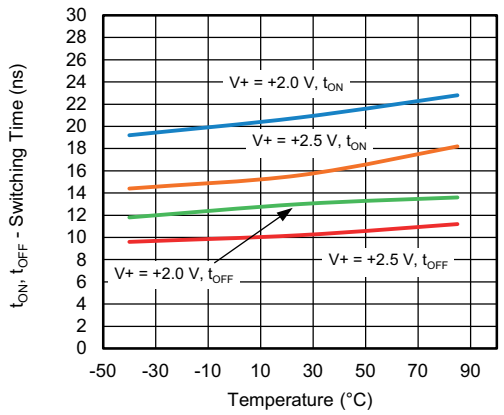


Switching Time vs. Temperature

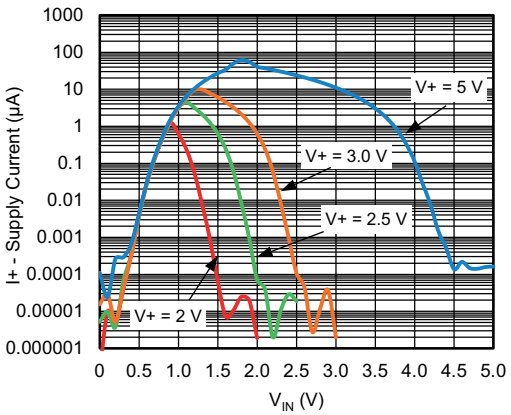


Supply Current vs. Enable Input Voltage

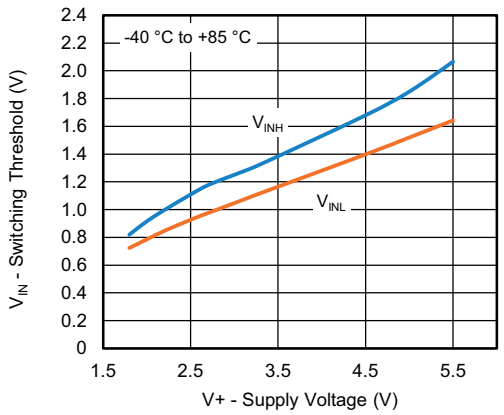


Switching Threshold vs. Supply Voltage

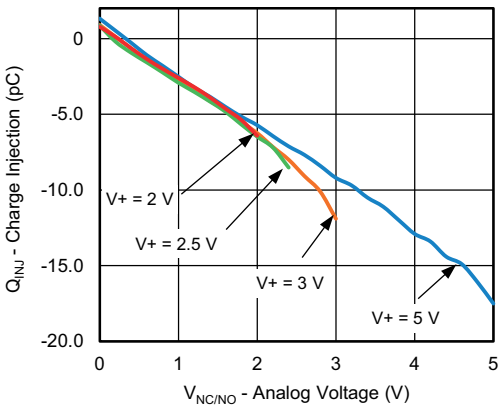

Charge Injection vs. Analog Voltage

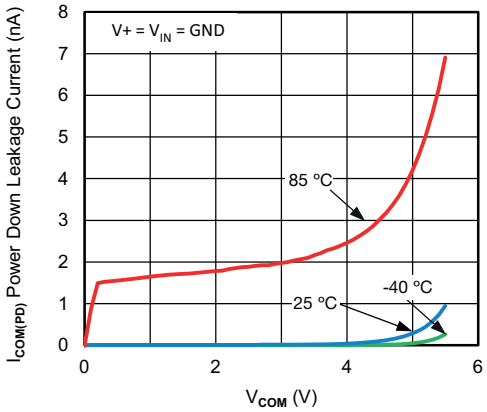


Power Down Leakage Current vs V_{COM}

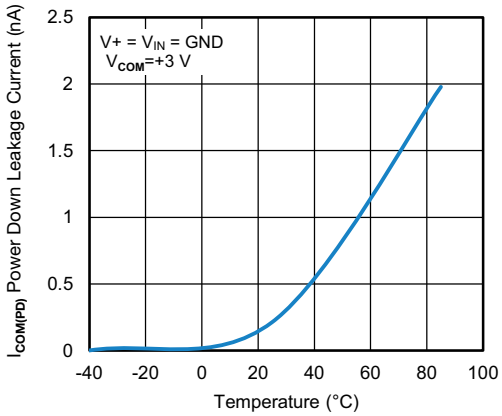

Power Down Leakage Current vs Temperature


For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

TEST CIRCUITS

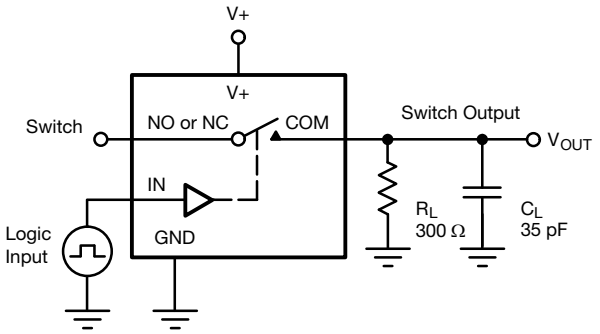


C_L (includes fixture and stray capacitance)

$$V_{OUT} = V_{COM}\left(\frac{R_L}{R_L + R_{ON}}\right)$$

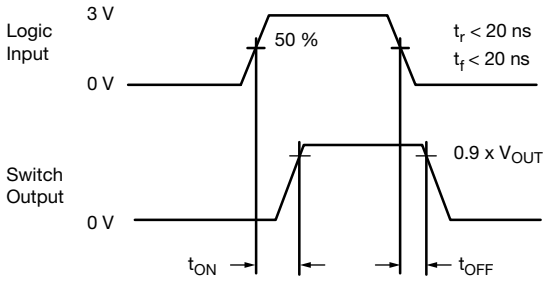

Logic "1" = switch on
Logic input waveforms inverted for switches that have the opposite logic sense.

Fig. 1 - Switching Time

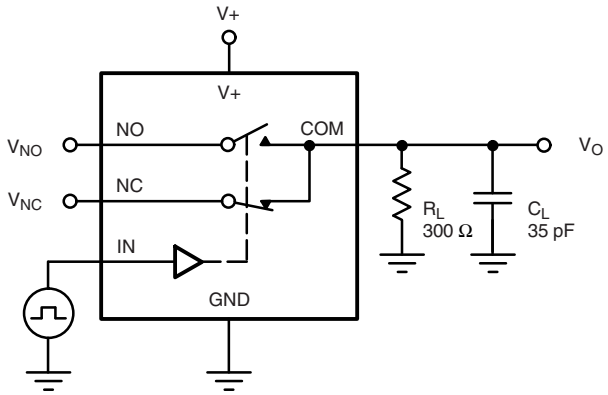

C_L (includes fixture and stray capacitance)



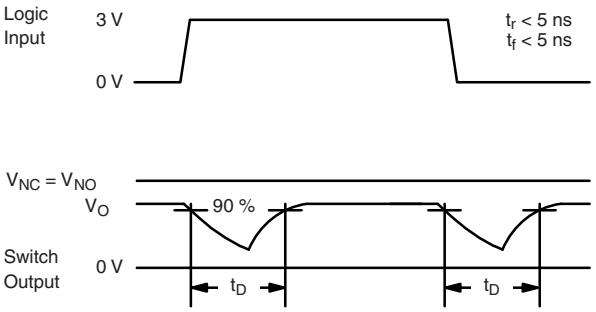


Fig. 2 - Break-Before-Make Interval

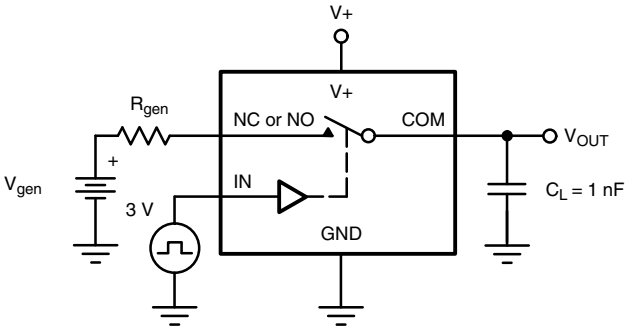

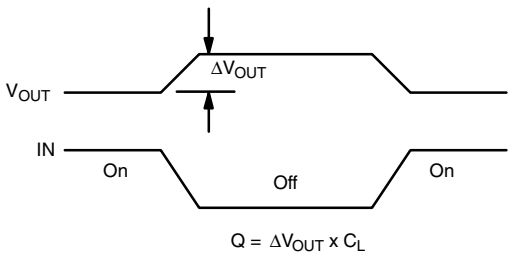

$Q = \Delta V_{OUT} \times C_L$

IN depends on switch configuration: input polarity determined by sense of switch.

Fig. 3 - Charge Injection

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

TEST CIRCUITS

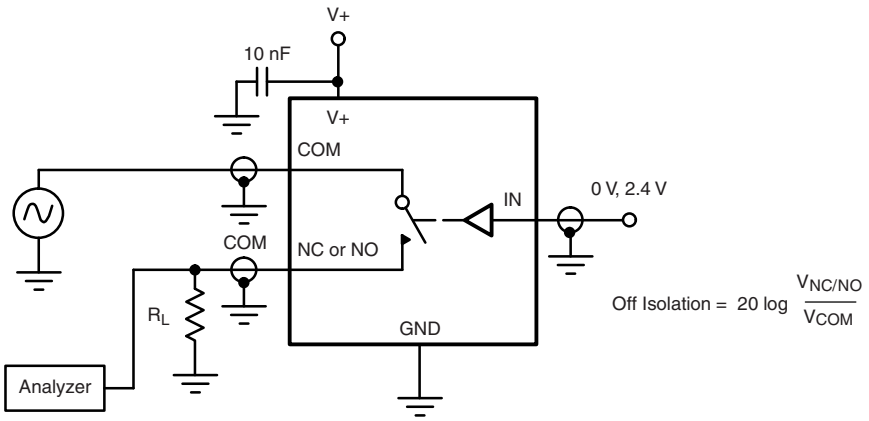


Fig. 4 - Off-Isolation

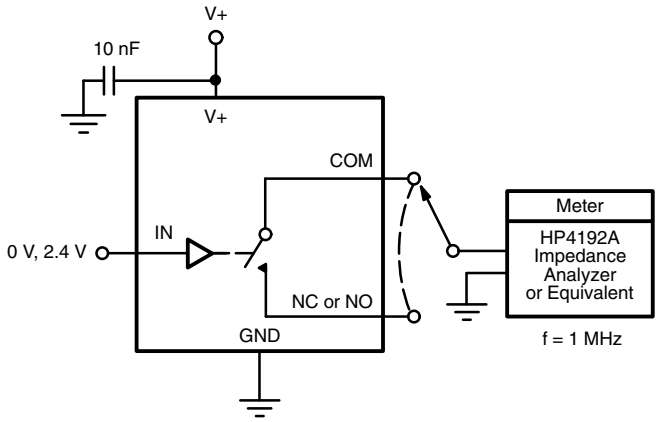


Fig. 5 - Channel Off / On Capacitance

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

PRODUCT SUMMARY	
Part number	DG9411E
Status code	2
Configuration	SPDT x 1
Single supply min. (V)	1.8
Single supply max. (V)	5.5
Dual supply min. (V)	-
Dual supply max. (V)	-
On-resistance (Ω)	6
Charge injection (pC)	1
Source on capacitance (pF)	13
Source off capacitance (pF)	7
Leakage switch on typ. (nA)	-
Leakage switch off max. (nA)	1.5
-3 dB bandwidth (MHz)	-
Package	SC-70-6
Functional circuit / applications	Multi Purpose, instrumentation, medical and healthcare, portable
Interface	Parallel
Single supply operation	Yes
Dual supply operation	-
Turn on time max. (ns)	30
Crosstalk and off isolation	-77


Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?76294.

For technical questions, contact: analogswitchtechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

SC-70: 6-LEADS

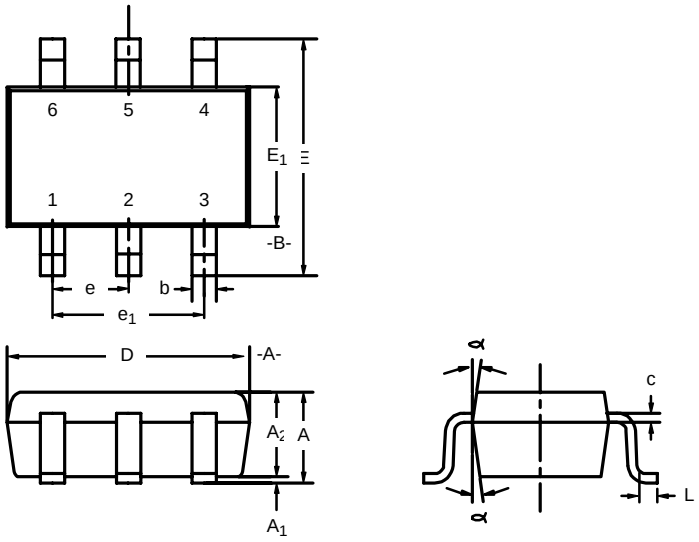


Dim	MILLIMETERS			INCHES		
	Min	Nom	Max	Min	Nom	Max
A	0.90	–	1.10	0.035	–	0.043
A_1	–	–	0.10	–	–	0.004
A_2	0.80	–	1.00	0.031	–	0.039
b	0.15	–	0.30	0.006	–	0.012
c	0.10	–	0.25	0.004	–	0.010
D	1.80	2.00	2.20	0.071	0.079	0.087
E	1.80	2.10	2.40	0.071	0.083	0.094
E_1	1.15	1.25	1.35	0.045	0.049	0.053
e	0.65BSC			0.026BSC		
e_1	1.20	1.30	1.40	0.047	0.051	0.055
L	0.10	0.20	0.30	0.004	0.008	0.012
α	7°Nom			7°Nom		

ECN: S-03946—Rev. B, 09-Jul-01
DWG: 5550

Downloaded from Arrow.com.

Recommended Minimum PADs for µDFN 6L

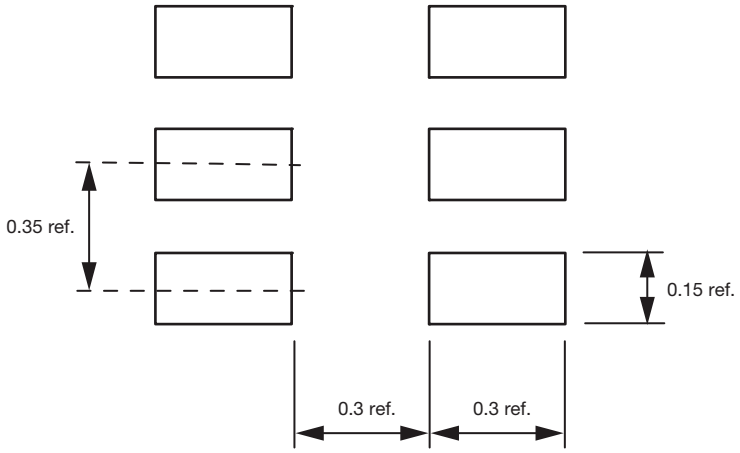

Mounting Footprint
Dimensions in mm

For technical questions, contact: analogswitchtechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2026 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.