

"High Frequency Ceramic Solutions"

802.11 a/c Dual Band 2.45/5.40 GHz Mini Chip Antenna

P/N 2450AD46A5400

Detail Specification: 2/4/2016


Page 1 of 8

AEC-Q200 qualification available.

Let us help you with the antenna design, optimization, and tuning!

General Specifications

Part Number	2450AD46A5400			
Frequency (MHz)	2400 - 2500	4900 - 5900		
Return Loss (dB)	8.5 min.	8.5 min.		
Peak Gain (dBi typ.)	1.0 dBi typ. (XZ-V)	-1.5 dBi typ. (YZ-V)		
Average Gain (dBi typ.)	-2.5 dBi typ. (XZ-V)	-2.5 dBi typ. (YZ-V)	Input Power	3 Watts max.
Total Measured Radiated Efficiency	76% (measured on 20x47mm EVB)	85% (measured on 20x47mm EVB)	Impedance	50 Ω
			Operating Temperature	-40 to +85°C
			Reel Quantity	1,000



Part Number Explanation

P/N Suffix	Packing Style	Bulk (loose)	Suffix = S	e.g.. 2450AD46A5400S
		T & R	Suffix = E	e.g.. 2450AD46A5400E
		100% Tin	Suffix = E or S	e.g.. 2450AD46A5400(E or S)
	Evaluation Board	2450AD46A5400-EB1SMA (To order, click here: www.johansontechnology.com/request-a-sample)		

Mechanical Dimensions

	In	mm	
L	0.335 $\pm$ 0.008	8.50 $\pm$ 0.20	
W	0.063 $\pm$ 0.008	1.60 $\pm$ 0.20	
T	0.047 $\pm$ 0.004 / -0.008	1.20 $\pm$ 0.1 / -0.2	
a	0.020 $\pm$ 0.006	0.51 $\pm$ 0.15	
b	0.104 $\pm$ 0.006	2.64 $\pm$ 0.15	
c	0.046 $\pm$ 0.006	1.18 $\pm$ 0.15	

Terminal Configuration

No.	Function
1	5G Band Feed
2	2.4G Band Feed
3	NC
4	NC

Find out more about our antenna design assistance services at:
www.johansontechnology.com/ipc-antenna-services

¹Make sure to have Pins 3 & 4 soldered to its PCB land pad but not connected to GND or input, they must be NC (or floating). If unsoldered, it may affect improper antenna resonance and drop-shock resistance.

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2016 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

802.11 a/c Dual Band 2.45/5.40 GHz Mini Chip Antenna

P/N 2450AD46A5400


Detail Specification: 2/4/2016

Page 2 of 8

Mounting Considerations 1: Single, combined feed (2&5G on the same trace)

Mount these devices with brown mark facing in


PCB Layout

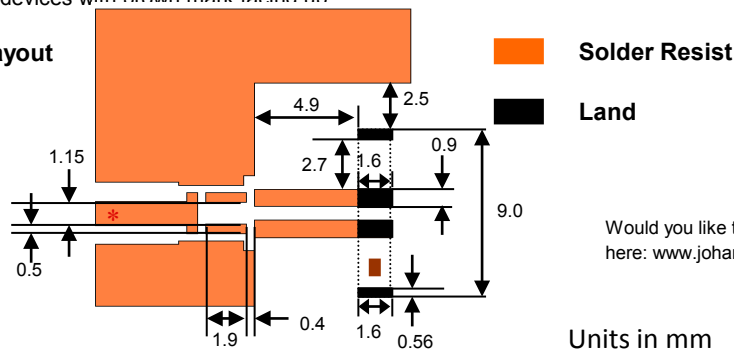

Would you like the layout file? Request it by clicking here: www.johansontechnology.com/ask-a-question

*50ohm trace recommended to be a grounded CPWG (<http://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm>)

Mounting Consideration 1: Evaluation Board

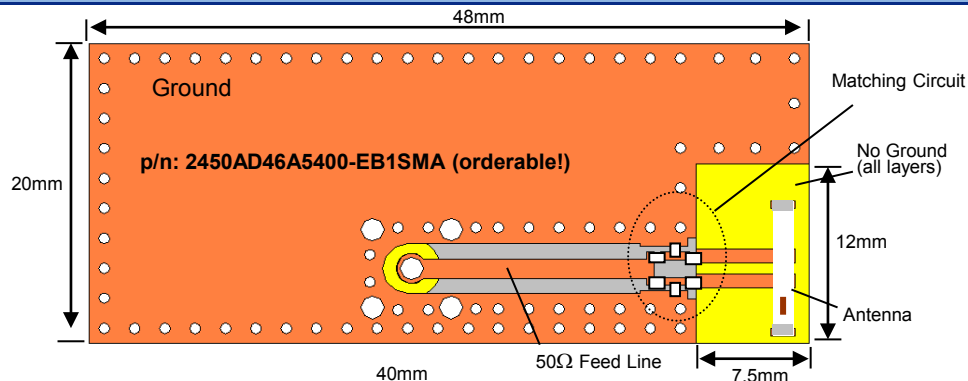

Matching circuits and component values will be different on the client's design, depending on PCB layout, geometry, etc.

Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: www.johansontechnology.com/ask-a-question Orderable EVB for evaluation, it comes with a female SMA connector. To order, click here: www.johansontechnology.com/request-a-sample and ask for p/n: 2450AD46A5400-EB1SMA

Would you like the layout file of the above? Have antenna tuning issues? Contact our applications engineers at: www.johansontechnology.com/ask-a-question

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 2.0 2016 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"



802.11 a/c Dual Band 2.45/5.40 GHz Mini Chip Antenna

P/N 2450AD46A5400

Detail Specification: 2/4/2016

Page 3 of 8

Mounting Consideration 1: Typical Return Loss (S11) Electrical Performance (T=25°C)

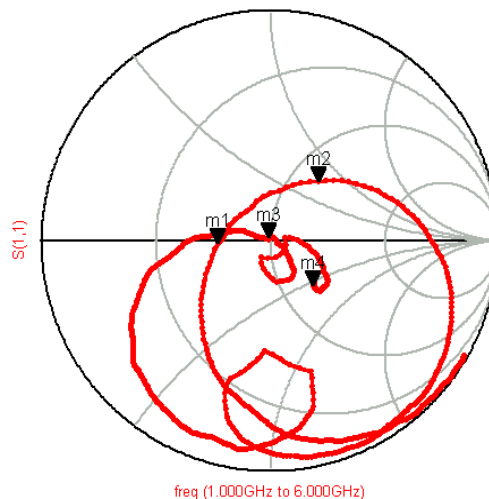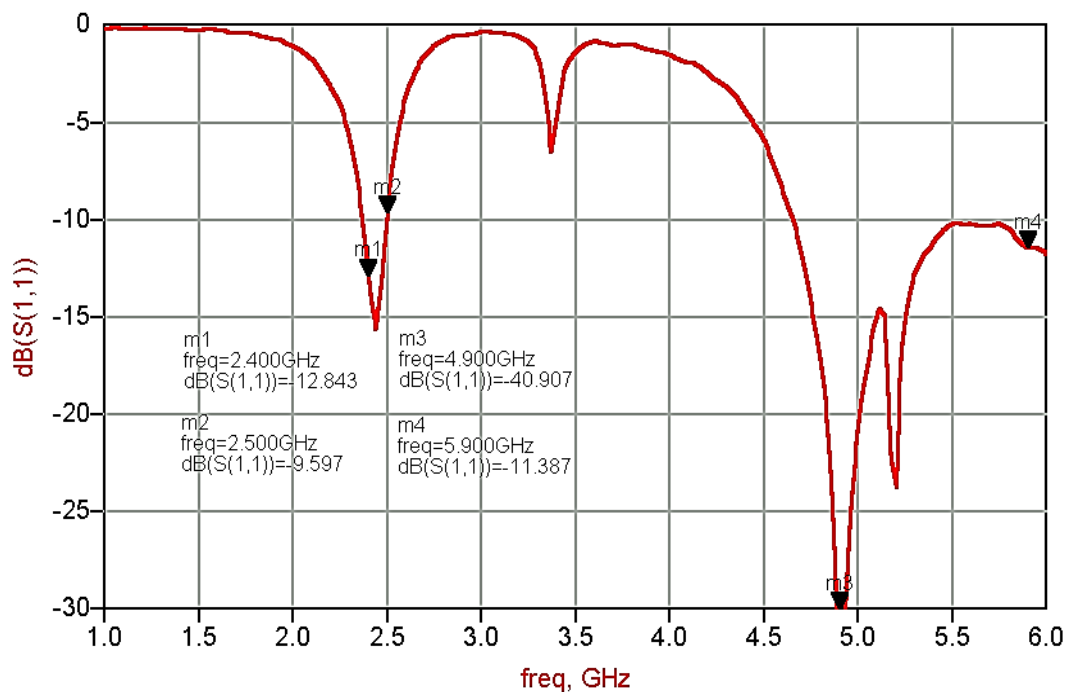

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 2.0 2016 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


802.11 a/c Dual Band 2.45/5.40 GHz Mini Chip Antenna

P/N 2450AD46A5400

Detail Specification: 2/4/2016

Page 4 of 8

Mounting Consideration 1: Typical EM Radiation Performance @ 2.45GHz (T=25°C)

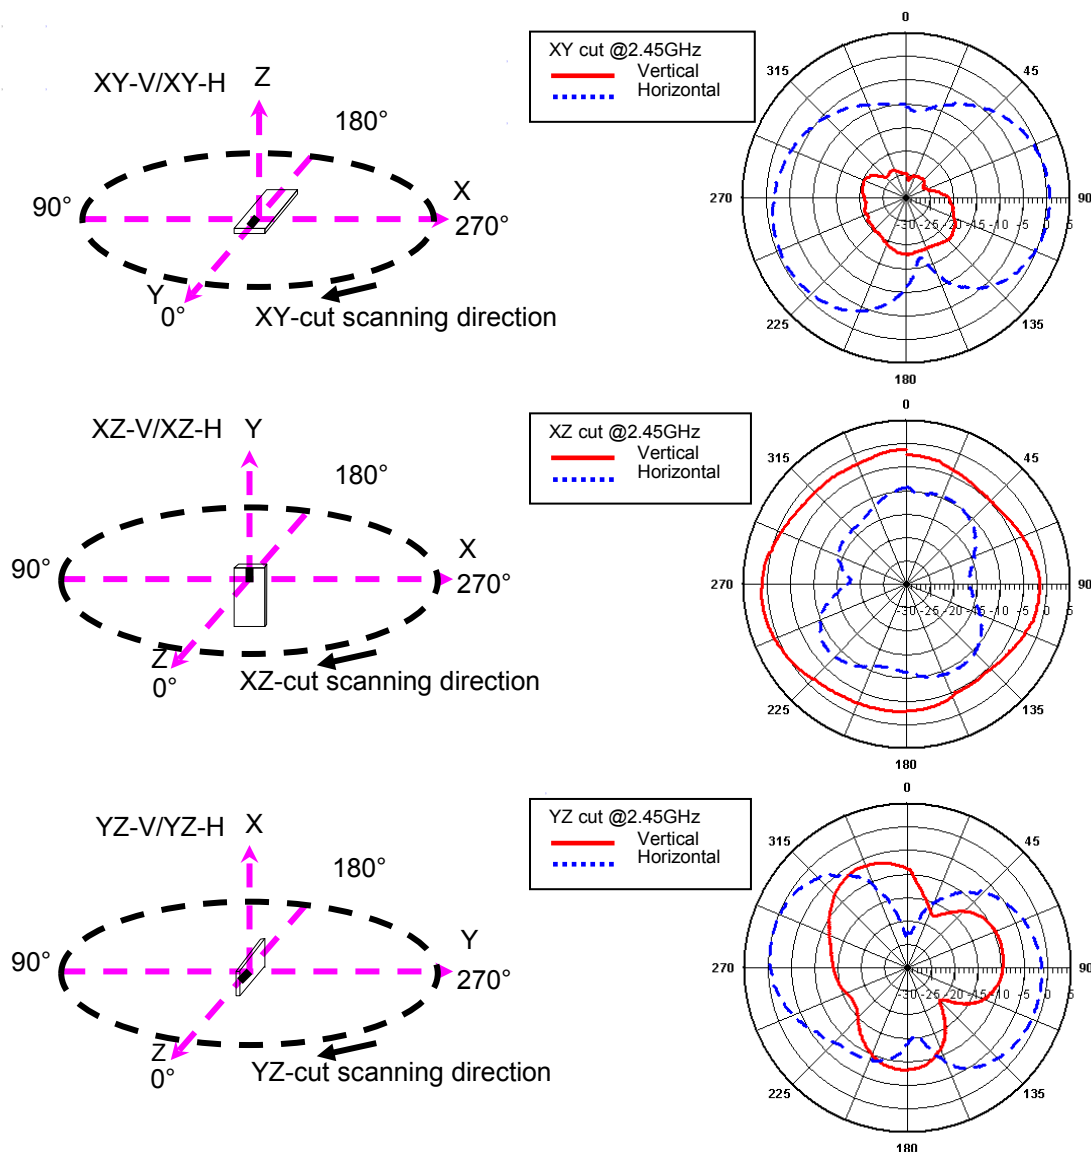

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 2.0 0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2016 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


802.11 a/c Dual Band 2.45/5.40 GHz Mini Chip Antenna

P/N 2450AD46A5400

Detail Specification: 2/4/2016

Page 5 of 8

Mounting Consideration 1: Typical EM Radiation Performance @ 5.40 GHz (T=25°C)

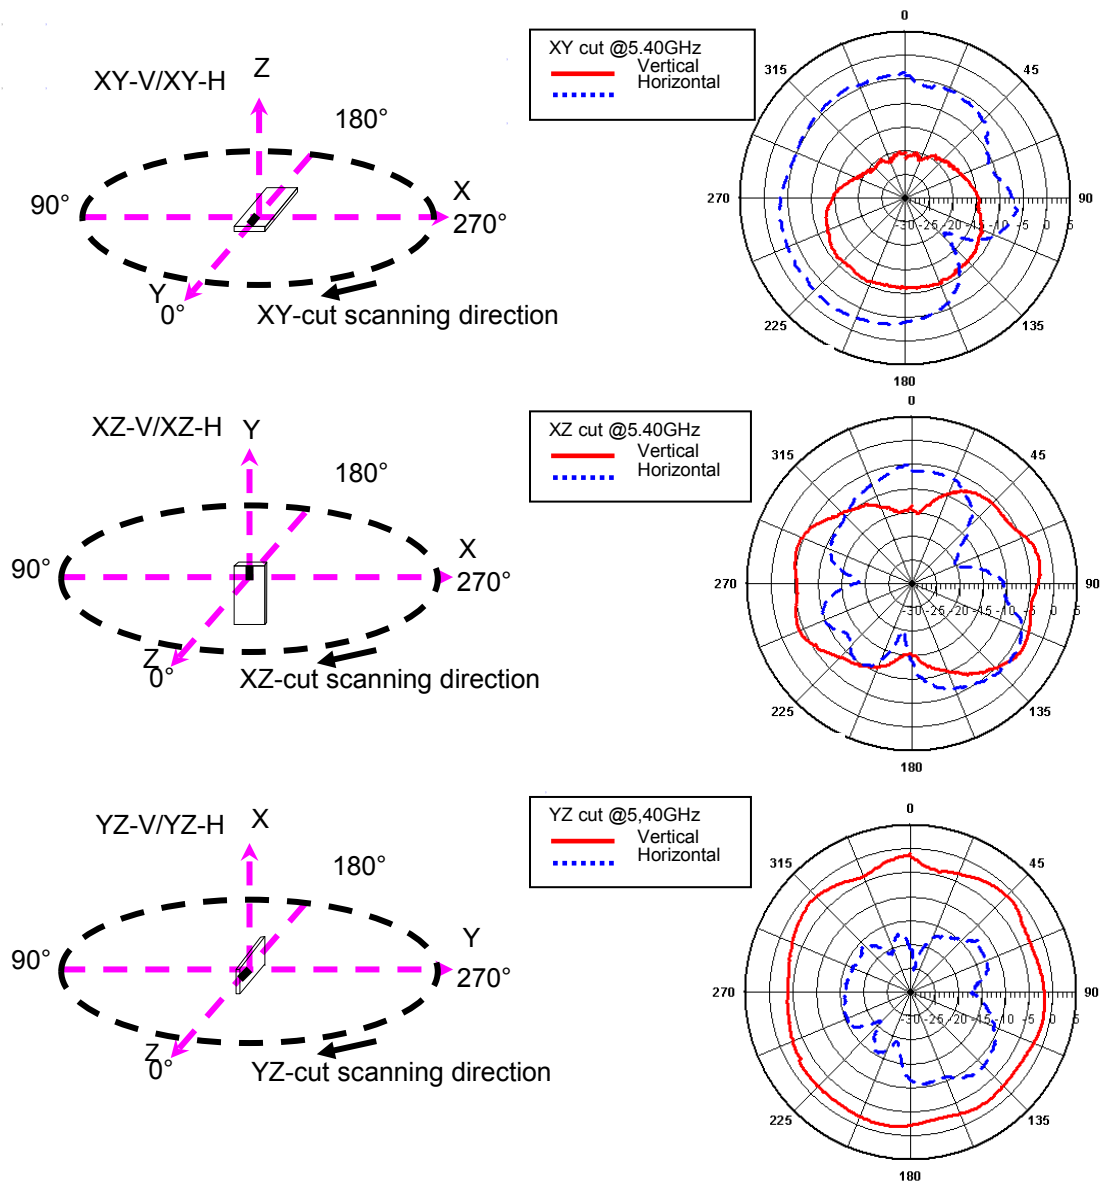

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"

802.11 a/c Dual Band 2.45/5.40 GHz Mini Chip Antenna

P/N 2450AD46A5400


Detail Specification: 2/4/2016

Page 6 of 8


Mounting Considerations 2: Two Separate Feeds

Mount these devices with brown mark facing up.

Line width should be designed to provide 50Ω impedance matching characteristics.

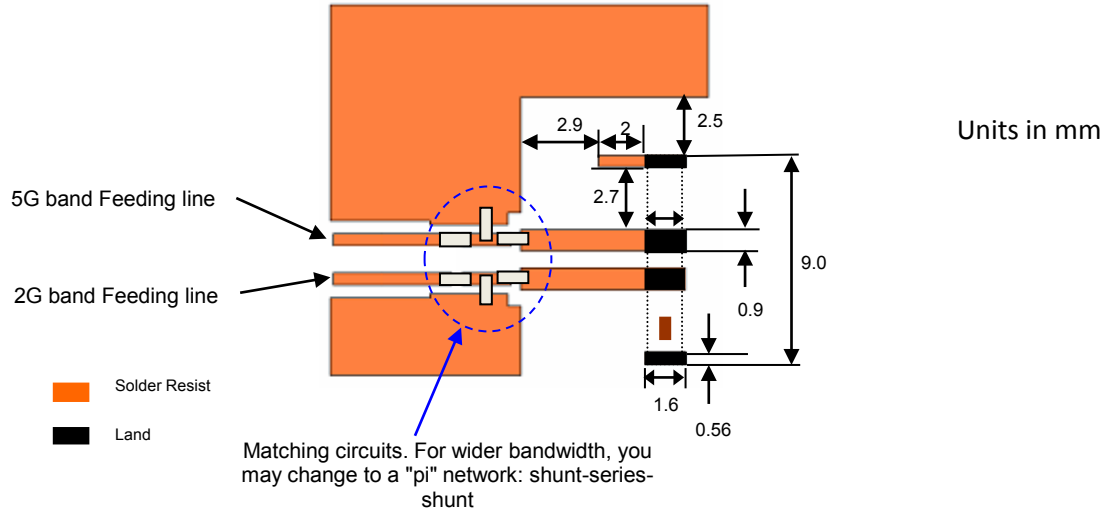

Mounting Consideration 2: Typical Return Loss and Isolation between the 2G & 5G feeds. Electrical Performance (T=25°C)

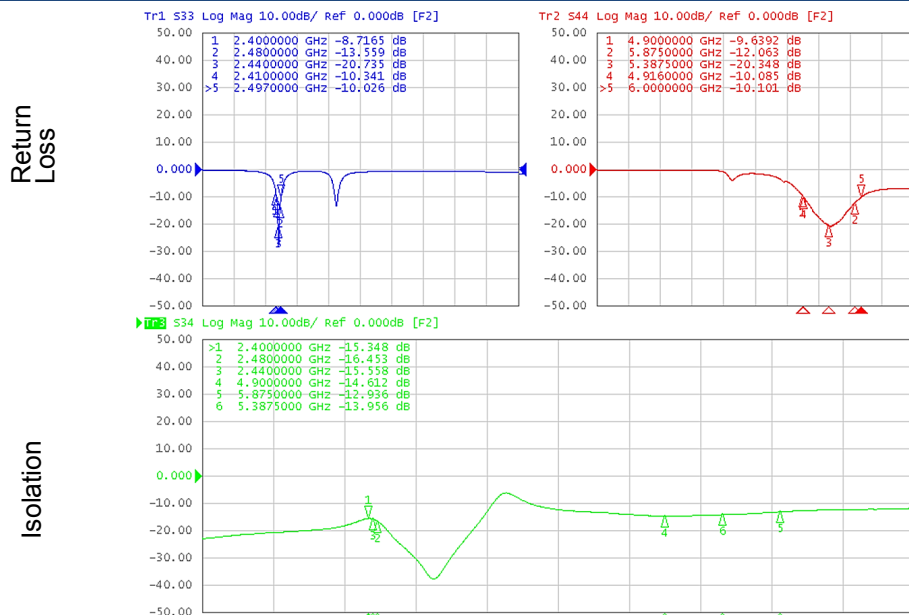

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
 Ver. 2.0 2016 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

802.11 a/c Dual Band 2.45/5.40 GHz Mini Chip Antenna

P/N 2450AD46A5400

Detail Specification: 2/4/2016


Page 7 of 8

Mounting Consideration 2: Typical EM Radiation Performance (T=25°C)


Unit in dBi @2400 ~ 5950 MHz	XY-plane		XZ-plane		YZ-plane		Total Meas. Rad. Efficiency
	Peak	Average	Peak	Average	Peak	Average	
2440 MHz	0.9	-4.1	0.2	-2.6	-2.7	-4.5	52.00%
5387.5 MHz	2.3	-1.1	2	-3.1	0.1	-1.6	70.00%

2440 MHz


XY-plane



XZ-plane




YZ-plane




5387.5 MHz


XY-plane



XZ-plane



YZ-plane



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2016 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design

P/N 2450AD46A5400

802.11 a/c Dual Banc 2/4/2016

Page 8 of 8

Antenna tuning, optimization, and validation services:

www.johansontechnology.com/ipc-antenna-services

For more antennas and to download measured S-parameters, go to:

www.johansontechnology.com/antennas

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

MSL Info

<http://www.johansontechnology.com/msl-rating>

Packaging information

www.johansontechnology.com/tape-reel-packaging

For layout review contact our Applications Team at:

www.johansontechnology.com/ask-a-question

RoHS Compliance

www.johansontechnology.com/rohs-compliance

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2016 Johanson Technology, Inc. All Rights Reserved